






LOYTEC

# Products

Product Catalog

2018/2019

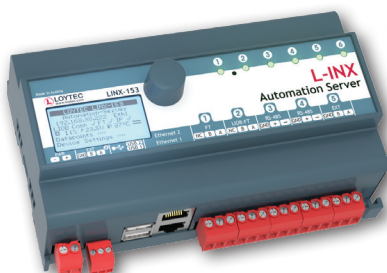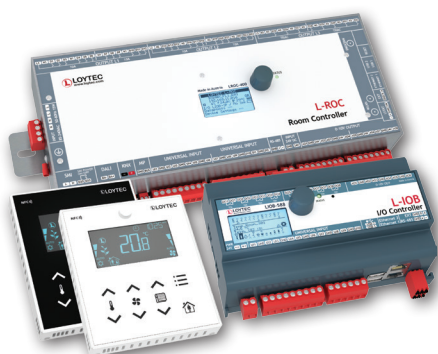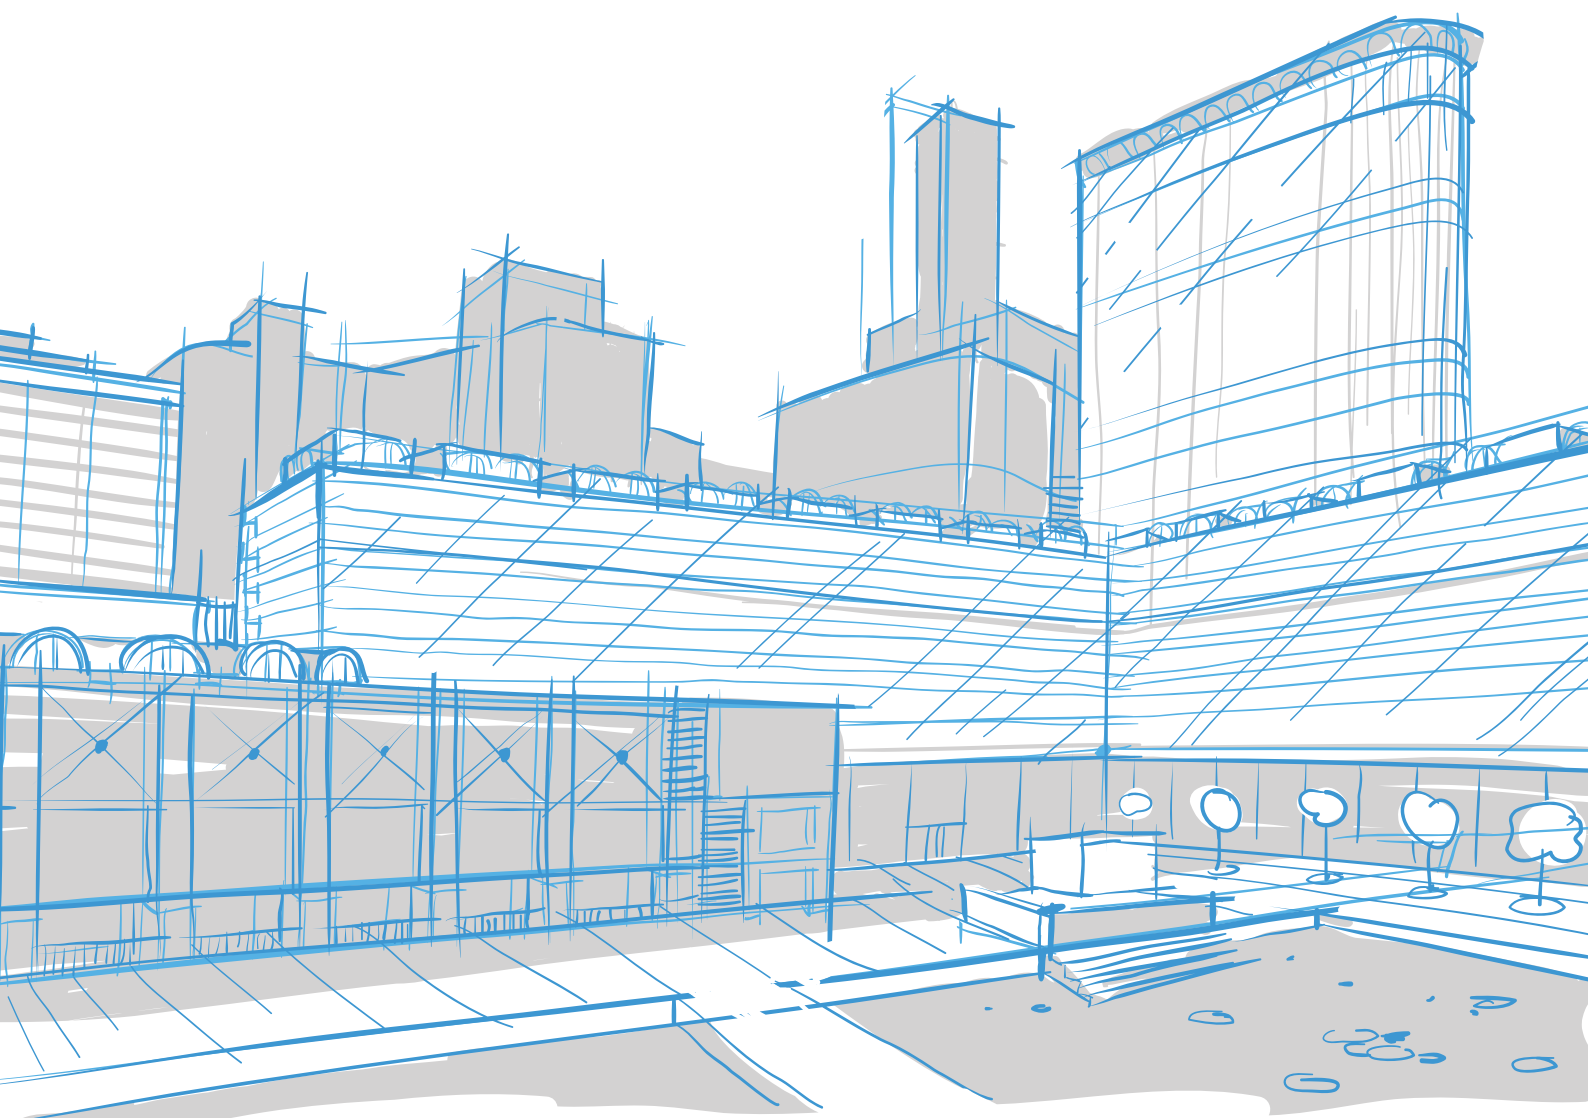

Dear valued customer,

LOYTEC keeps striving for innovations in the field of building automation and building management. The focus is on a maximizing energy efficiency, comfort, flexibility, and transparency regarding energy consumption. Synergies that arise from the integration of different systems create potentials for savings that should be ideally leveraged. LOYTEC meets these challenges and transforms the resulting requirements into best possible solutions. The results are innovative, consistent, and dedicated products made in Austria that are sold globally.

LOYTEC relies solely on open communication protocols emphasizing communication via Ethernet/IP and WLAN/IP and is further focused on the international standards ISO 16484-5 (BACnet), ISO/IEC 14908-1 (LON), ISO/IEC 14543 (KNX), and OPC. Of course, also EnOcean (radio), M-Bus (meter), Modbus, SMI (sun blinds), and MP-Bus are supported.

LOYTEC demonstrates its strength in innovation with the creation of a new generation of L-INX Automation Servers. Our new top class flagship is the LINX-153, which provides six communication interfaces at once. LINX-215 represents the new middle class of Automation servers, which keeps up with the top class function-wise. Both classes of devices provide all protocols of the LOYTEC portfolio and feature Dual Ethernet and local operation via LCD and jog-dial. Naturally all network security functions are also implemented. "Packed with power" is the name of the game.


Synchronized with the launch of the new L-INX generation LOYTEC also puts the new tool platform L-STUDIO 3.0 on the market. L-STUDIO 3.0 proves LOYTEC's steady strive for constant improvements of workflows, methods, and automatisms. Latest software techniques together with powerful hardware and fast communication channels (Ethernet IP and WLAN/IP) ensure critical advantages. Packed with unique features L-STUDIO 3.0 increases efficiency in project completion. Programming in IEC 61131-3 and IEC 61499, visualization, and data point management are now fully integrated. Instead of single controllers, L-STUDIO 3.0 now manages complete systems and automatically handles data point connections between controllers.

The product family of LROC-400 Room Controllers is a showcase of LOYTEC's capabilities in innovative technology. Full integration of all systems in a room is self-evident. For this purpose LROC-400 simultaneously provides all protocols of the LOYTEC product portfolio and also features sufficient in- and outputs to extensively control up to 8 room segments.


L-ROC is configured and programmed in L-STUDIO which offers methods and functions that enable highly efficient work. The high performant LROC-400 hardware in combination with L-STUDIO is a performance show made by LOYTEC that is not only on a high technical level, but also opens many doors for commercial use.

The LOYTEC building management system LWEB-900 faces continuous development as it constitutes the basis of properly managing technical plants in a building or in distributed real estates. Through the use of SSL secured web services for connecting the management system to LOYTEC's automation stations within a building, the server necessary for the system can be hosted in a secured data center. There, all data of a building including all device configurations are stored and can be backed up daily. Another valid reason for a data center is that users can access the data via secured connections from their offices or on their ways. Of course, LWEB-900 can also be operated as a BACnet Operator Workstation that allows to integrate devices of third parties via BACnet/IP.

Immerse yourself into the world of LOYTEC and be inspired by our product solutions. Convince yourself of our innovativeness and enjoy the offered technological benefits to experience tomorrow's building automation already today.

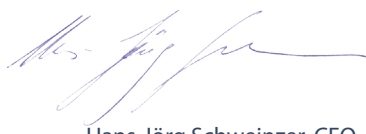

Hans-Jörg Schweinzer, CEO  
LOYTEC electronics GmbH

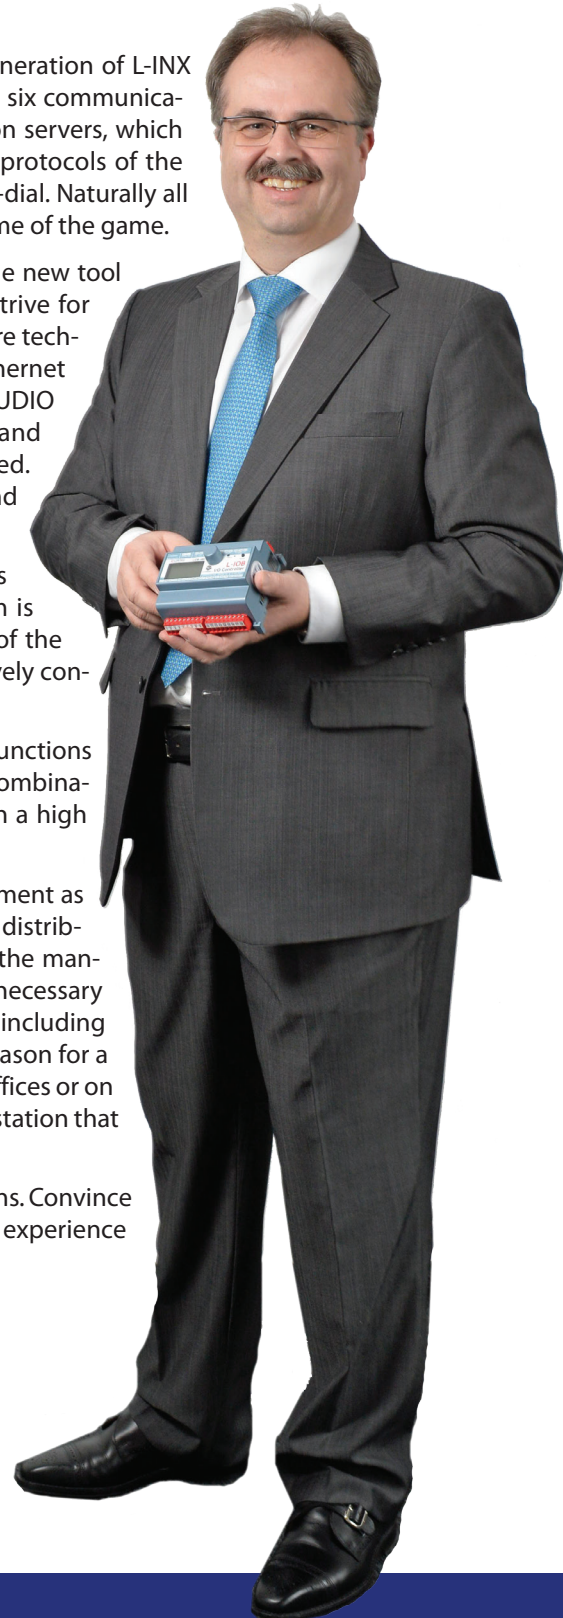



|                                                 |    |
|-------------------------------------------------|----|
| <b>Overview</b>                                 | 4  |
| LOYTEC Product Overview                         | 4  |
| <b>Functions</b>                                | 5  |
| AST™ Functions                                  | 6  |
| Communication                                   | 8  |
| Gateway                                         | 13 |
| L-IOB I/O                                       | 14 |
| Programming Functions                           | 15 |
| Device Management                               | 15 |
| Visualization / Operate and Monitor             | 16 |
| <b>L-WEB Building Management &amp; L-STUDIO</b> | 19 |
| Integrated Building Management System           | 20 |
| LWEB-900                                        | 20 |
| LWEB-803                                        | 26 |
| LWEB-802                                        | 29 |
| Engineering Tool                                | 31 |
| L-STUDIO 3.0                                    | 31 |
| <b>L-ROC Room Automation</b>                    | 33 |
| LROC-102                                        | 34 |
| LROC-400, LROC-401, LROC-402                    | 40 |
| <b>L-INX Automation Servers</b>                 | 49 |
| L-INX Overview                                  | 50 |
| LINX-153, LINX-154                              | 51 |
| LINX-215                                        | 56 |
| <b>L-IOB I/O Controllers &amp; Modules</b>      | 59 |
| L-IOB I/O Controllers                           | 60 |
| LIOB-FT I/O Controller                          | 61 |
| LIOB-180/181/182/183/184 V2                     | 61 |
| LIOB-IP852 I/O Controller                       | 63 |
| LIOB-480/481/482/483/484 V2                     | 63 |
| LIOB-BIP I/O Controller                         | 65 |
| LIOB-580/581/582/583/584 V2                     | 65 |
| L-IOB I/O Controller                            | 67 |
| LIOB-585                                        | 67 |
| L-IOB I/O Controller                            | 71 |
| LIOB-586/588/589                                | 71 |
| L-IOB I/O Modules                               | 75 |
| LIOB-Connect I/O Module                         | 76 |
| LIOB-100/101/102/103 V2                         | 76 |
| LIOB-FT I/O Module                              | 78 |
| LIOB-150/151/152/153/154 V2                     | 78 |
| LIOB-IP852 I/O Module                           | 80 |
| LIOB-450/451/452/453/454 V2                     | 80 |
| LIOB-BIP I/O Module                             | 82 |
| LIOB-550/551/552/553/554 V2                     | 82 |

# Content

---

|                                                                    |     |
|--------------------------------------------------------------------|-----|
| <b>L-IOB I/O Controller with Application Program</b>               | 84  |
| LIOB-AIR                                                           | 85  |
| <b>Actuator</b>                                                    | 88  |
| L-ACT101-MP, L-ACT102-MP                                           | 88  |
| <b>General Input and Output Specification of LOYTEC devices</b>    | 90  |
| <b>Gateways</b>                                                    | 91  |
| <b>L-GATE, L-INX, L-DALI</b>                                       | 92  |
| <b>L-GATE Gateway</b>                                              | 93  |
| LGATE-952                                                          | 93  |
| LGATE-902                                                          | 96  |
| LINX-102, LINX-103                                                 | 99  |
| LINX-202, LINX-203                                                 | 102 |
| <b>L-VIS, L-STAT Touch Panels &amp; Network Thermostats</b>        | 105 |
| L-VIS Overview                                                     | 106 |
| LVIS-3ME7-Gx/3ME12-A1/3ME15-A1/3ME15-Gx                            | 107 |
| <b>L-STAT Network Thermostat</b>                                   | 110 |
| LSTAT-800, LSTAT-801, LSTAT-802                                    | 110 |
| <b>L-DALI Lighting Control</b>                                     | 115 |
| L-DALI Overview                                                    | 116 |
| <b>CEA-709/DALI Controller</b>                                     | 117 |
| LDALI-3E101-U, LDALI-3E102-U, LDALI-3E104-U                        | 117 |
| <b>BACnet/DALI Controller</b>                                      | 122 |
| LDALI-ME204-U, LDALI-ME201-U                                       | 122 |
| <b>Programmable DALI Controller</b>                                | 127 |
| LDALI-PLC4                                                         | 127 |
| <b>L-DALI Power Supply</b>                                         | 132 |
| LDALI-PWR2-U, LDALI-PWR4-U                                         | 132 |
| <b>L-DALI Multi-Sensor</b>                                         | 133 |
| LDALI-MS2                                                          | 133 |
| <b>Infrared Remote Control</b>                                     | 135 |
| L-RC1                                                              | 135 |
| <b>L-DALI Pushbutton Coupler</b>                                   | 136 |
| LDALI-BM2                                                          | 136 |
| <b>L-DALI Relay Module</b>                                         | 138 |
| LDALI-RM3, LDALI-RM4                                               | 138 |
| <b>Routers, NIC</b>                                                | 141 |
| <b>CEA-709/IP-852 Router</b>                                       | 142 |
| LIP-1ECTC, LIP-3ECTC, LIP-33ECTC, LIP-3333ECTC                     | 142 |
| <b>BACnet/IP Router</b>                                            | 144 |
| LIP-ME201C, LIP-ME202C, LIP-ME204C                                 | 144 |
| <b>CEA-709/IP-852 Router Redundant</b>                             | 146 |
| LIP-33ECRB                                                         | 146 |
| <b>L-Switch<sup>XP</sup> CEA-709 Router</b>                        | 148 |
| LS-33/13/11/13300/33300/13333/11333CB                              | 148 |
| <b>NIC Network Interface</b>                                       | 149 |
| NIC709-IP3E100C, NIC709-IP1E100C, NIC709-USB100, NIC852-SW, NIC852 | 149 |

|                                                           |     |
|-----------------------------------------------------------|-----|
| <b>LPA – CEA-709 Protocol Analyzer</b> . . . . .          | 151 |
| LPA-SET-USB, LPA-USB, LPA-IP, LPA-SW, LPA-IP-SW . . . . . | 151 |
| <b>Interfaces</b> . . . . .                               | 153 |
| <b>M-Bus Level Converter</b> . . . . .                    | 154 |
| L-MBUS20, L-MBUS80 . . . . .                              | 154 |
| <b>MP-Bus Interface</b> . . . . .                         | 155 |
| LMPBUS-804 . . . . .                                      | 155 |
| <b>KNX TP1 Interface</b> . . . . .                        | 156 |
| LKNX-300 . . . . .                                        | 156 |
| <b>L-ENO EnOcean Interface</b> . . . . .                  | 157 |
| LENO-800, LENO-801, LENO-802 . . . . .                    | 157 |
| <b>L-WLAN Wireless LAN Interface</b> . . . . .            | 158 |
| LWLAN-800 . . . . .                                       | 158 |
| <b>L-SMI Standard Motor Interface</b> . . . . .           | 159 |
| LSMI-800, LSMI-804 . . . . .                              | 159 |
| <b>Accessories</b> . . . . .                              | 161 |
| <b>L-POW Power Supply</b> . . . . .                       | 162 |
| LPOW-2415A, LPOW-2415B, LPOW-2460B . . . . .              | 162 |
| <b>System Distribution Box</b> . . . . .                  | 163 |
| LBOX-600, LBOX-ROC1, LBOX-ROC2 . . . . .                  | 163 |
| <b>L-Term Network Terminator</b> . . . . .                | 164 |
| LT-03, LT-13, LT-33 . . . . .                             | 164 |
| LT-04, LT-B4 . . . . .                                    | 165 |
| <b>L-IOB Adapter</b> . . . . .                            | 166 |
| LIOB-A2, LIOB-A4, LIOB-A5 . . . . .                       | 166 |
| <b>Managed Fast Ethernet Switch</b> . . . . .             | 167 |
| DVS-110W02-3SFP . . . . .                                 | 167 |
| <b>Unmanaged Fast Ethernet Switch</b> . . . . .           | 168 |
| DVS-008I00 . . . . .                                      | 168 |
| <b>Device Dimensions, Certificates</b> . . . . .          | 169 |
| Dimensions of the devices in mm and [inch] . . . . .      | 170 |
| Certificates . . . . .                                    | 196 |
| Trainings . . . . .                                       | 201 |
| Brochures . . . . .                                       | 202 |
| LOYTEC Competence Partner . . . . .                       | 204 |



LOYTEC Product Overview

| LWEB-900 Building Management System                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |        |     |         |      |     |        |       |        |     |              |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|-----|---------|------|-----|--------|-------|--------|-----|--------------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |        |     |         |      |     |        |       |        |     |              |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |        |     |         |      |     |        |       |        |     |              |
| LON                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | BACnet | KNX | EnOcean | DALI | SMI | Modbus | M-Bus | MP-Bus | OPC | Programmable |
| <div> <div> <div>User Interface</div> <div> </div> <div>L-VIS<br/>L-WEB<br/>L-STAT</div> </div> <div> <div>I/O Controller</div> <div> </div> <div>L-IOB</div> </div> <div> <div>Lighting Control</div> <div> </div> <div>L-DALI</div> </div> <div> <div>Room Automation</div> <div> </div> <div>L-ROC<br/>L-INX<br/>L-IOB<br/>L-KNX</div> </div> <div> <div>Energy Management, Metering</div> <div> </div> <div>L-INX<br/>L-IOB<br/>L-MBUS</div> </div> <div> <div>HVAC Control</div> <div> </div> <div>L-INX<br/>L-IOB<br/>L-MBUS<br/>L-MPBUS</div> </div> <div> <div>Gateways</div> <div> </div> <div>L-GATE<br/>L-INX<br/>L-DALI</div> </div> <div> <div>Network Infrastructure</div> <div> </div> <div>L-IP<br/>L-Switch<br/>NIC</div> </div> </div> |        |     |         |      |     |        |       |        |     |              |
| ✓                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | ✓      |     |         |      |     | ✓      |       |        | ✓   |              |
| ✓                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | ✓      |     |         |      |     |        |       | ✓      | ✓   | ✓            |
| ✓                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | ✓      |     | ✓       | ✓    | ✓   | ✓      |       |        | ✓   |              |
| ✓                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | ✓      | ✓   | ✓       | ✓    | ✓   | ✓      | ✓     | ✓      | ✓   | ✓            |
| ✓                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | ✓      | ✓   | ✓       |      |     | ✓      | ✓     | ✓      | ✓   | ✓            |
| ✓                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | ✓      | ✓   | ✓       |      |     | ✓      | ✓     | ✓      | ✓   |              |
| ✓                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | ✓      |     |         |      |     |        |       |        | ✓   |              |

# Functions



# Functions



LOYTEC offers a wide range of products for various applications in building automation. Those application-centric products often combine an entire set of different functions on one single device (L-INX Automation Servers, IP-capable L-IOB I/O Modules and Controllers, L-ROC Room Controllers, L-GATE Gateways, L-VIS Touch Panels). This enables a given product to be used for different tasks. For example, the L-GATE as a typical gateway also has the ability to host a graphical user interface to dynamically visualize a site or record historic data in trend logs. L-INX Automation Servers are primarily programmable controllers but can also be used as gateways depending on the available protocols.

We have high quality standards in research, development, and production of our products. In order to offer the same high standards to our customers, the programmable controllers may only be purchased by trained staff of companies that are enrolled in the LOYTEC Competence Partner Program.

For all functions, LOYTEC ensures common workflows for configuration and operation. The workflow for configuration of certain functions is the same, regardless which device

is used. This applies for integration in different communication network technologies, creating schedules, alarm conditions, trend logs, and even for the design of graphical projects. For an efficient workflow the user can – depending on the network technology – create single data points or entire device templates via a network scan or file import. The use of a single configuration tool for a range of product models such as the L-INX Automation Servers, L-IOB I/O Modules, L-IOB I/O Controllers, and L-GATE Gateways, reduces the learning curve notably when working with LOYTEC products.

The combination of different functions on a single device and the common workflows for configuration and operation offer a maximum of flexibility when selecting LOYTEC products for various application requirements. On the following pages we give an overview on the offered functions. For more detailed information on the presented functions please refer to the respective product manuals, which are available for download on our web site. The functions are represented by symbols, which are referred to by the respective product descriptions later in the catalog.

## AST™ Functions

The acronym AST™ stands for the combination of alarming (alarm management), scheduling, and trending (historic data recording) functions, which are available as automation functions on LOYTEC devices (L-INX Automation Servers, IP-capable L-IOB I/O Controllers, L-ROC Room Controllers, L-GATE Gateways, L-VIS Touch Panels). The AST™ functions can therefore be distributed into the field and are available exactly where they are needed in a building automation system. AST™ functions can be seamlessly integrated with the L-WEB building management software. Also graphical user interfaces like LWEB-802/803, the building management system LWEB-900 and the L-VIS Touch Panels provide access to the distributed AST™ functions.

## Alarming (Alarm Management)



On a LOYTEC device it is possible to define alarm conditions for each data point. This can be done independently of the underlying communication technology (CEA-709, BACnet, DALI, M-Bus, Modbus, KNX, etc.) or the underlying, physical data point of a L-IOB I/O Module.

Alarms generated by these alarm conditions are reported to a generic alarm server, which is also independent of the network technology. The alarm server collects alarm records and is the interface for remote access to those local alarms. Alarm records contain information on the alarm source data point, the alarm value, an alarm message, alarm type (off-normal, limit, fault), alarm priority, and alarm state (alarm active, acknowledged, inactive). The alarm message of the record can be user-defined and extended by variable placeholders.

LOYTEC devices with a BACnet interface support BACnet alarms with intrinsic reporting. BACnet alarm servers are mapped to BACnet notification class (NC) objects. Alarm conditions can be defined for analog input, output, and value objects (AI, AO, AV), for binary input, output, and value objects (BI, BO, BV) and for multi-state input, output, and value objects (MSI, MSO, MSV). More than this, alarm records from generic alarm servers can be reported to BACnet alarm servers and can be exposed to notification class objects. This allows the reporting of alarm conditions from other communication technologies to BACnet. Using client mappings, LOYTEC devices can also access remote BACnet notification class objects, for instance to receive alarms from third-party devices.

LOYTEC devices for LonMark Systems (CEA-709) support the transmission of alarms via the LonMark node object's nvoAlarm (SNVT\_alarm) and nvoAlarm\_2 (SNVT\_alarm\_2). This allows other devices that support the LonMark alarm notifier profile to receive alarms sent by LOYTEC devices. The acknowledgement of alarms in the LonMark alarm server is defined in the LonMark specification and works with the RQ\_CLEAR\_ALARM mechanism. Alarms from generic alarm servers can be reported to the LonMark alarm server (mapped to the LonMark node object). This way alarm conditions of data points from other network technologies can be reported to a LonMark System.

Alarms of the different alarm servers can be displayed in LWEB-900, LWEB-802/803, L-VIS Touch Panels or in the device's integrated web interface using the built-in web server.



The alarming feature also includes the recording of alarm transitions in an alarm log on the LOYTEC device. The alarm log works as a ring buffer and its size can be configured. The alarm log can be viewed on the web interface of the LOYTEC device and be exported to a CSV file. The alarm log can also be transmitted as a CSV file e-mail attachment or be downloaded from the device via FTP access.

## Scheduling



Scheduling refers to changing the value of data points on a timely basis using a time schedule. The schedule contains a weekly schedule, exception days (e.g. holidays), and date periods (e.g. vacation time). The scheduling feature works locally on LOYTEC devices and can be enabled depending on an enable data point.

All LOYTEC devices supporting the scheduling function feature a built-in battery-buffered Real Time Clock (RTC). Schedules can change the state of a binary data point or the value of an analog data point. This occurs independently of the underlying communication technology (CEA-709, BACnet, DALI, M-Bus, Modbus, KNX, etc.) or the underlying, physical data point of a L-IOB I/O Module.

Generic schedulers – like generic trends and alarms – can be created, that are neither CEA-709 nor BACnet objects. They are beneficial for creating technology-independent applications. Generic schedulers can write to any technology as well as data point favorites and are the ideal solution if configured via LWEB-900 only.

LOYTEC devices with a BACnet interface use the standardized BACnet schedule and calendar object to map the schedule. A separate BACnet schedule object is created for each schedule. BACnet calendar objects are used for defining exception days. The BACnet schedule object allows scheduling of a single value at a time (multistate, analog, or binary). More than one scheduled value or different data types at a time are not possible. Using the client mapping function, it is possible to access remote BACnet scheduler objects. This allows reading and modifying schedules of third-party devices.

LOYTEC devices for LonMark Systems (CEA-709) support CEA-709 schedulers and CEA-709 calendars via standard LonMark objects. For CEA-709 schedules, more than one data point can be configured, possibly of different data type, for which a set of different values can be scheduled at a time.

Schedules are executed autonomously on LOYTEC devices. The schedules and scheduled values can be viewed and configured in LWEB-900, LWEB-802/803, L-VIS Touch Panels, or on the device's web interface using the built-in web server. The distributed schedules on LOYTEC devices can be managed by the LWEB-900 Building Management System. LWEB-900 allows grouping schedules, building a hierarchical structure, and configuring schedules efficiently.

## Trending (Historic Data Logging)



Generic trend logs are technology-independent and allow the recording of historic data values over time. The recording of data point values occurs at fixed intervals, on a defined change-of-value, or is triggered by a trigger data point. Recording intervals can be aligned to the wall-time. For example, different trend logs with 15 minutes intervals can record synchronously aligned to the top of the hour. For each data point, a change-of-value condition can be defined on the LOYTEC device. Trends operate independently of the underlying communication technology (CEA-709, BACnet, DALI, M-Bus, Modbus, KNX, etc.) or the underlying, physical data point of a L-IOB I/O Module. Trend logs can record local and remote data points of other, distributed devices. The capacity of a trend log and the storage mode (linear or ring buffer) can be configured. Devices that support SD cards or have a USB port also allow the storage of trend log data on external memory. The time of backing up trend logs can be triggered by the user on the LCD display or by defined, automatic trigger conditions.

LOYTEC devices with a BACnet interface can also use BACnet trend log objects for historic data recording. These objects can be accessed over the BACnet network and expose trend data to other BACnet devices and operator workstations (OWS). Each BACnet trend log object can record data for a single data point only. The recorded data point is limited to the BACnet technology, either to a local BACnet object or to a remote BACnet object (configured by a client mapping).

LOYTEC devices for LonMark Systems (CEA-709) use generic trend logs. There exists no LonMark functionality that allows transparent LonMark access to trend log data.

Trend log data of the different trend log objects can be displayed by LWEB-900, LWEB-802/803 and L-VIS. Trend data can be viewed either in a table view or in a trend graph. In addition, the LWEB-900 server allows long-term storage of the historic trend data. For doing so, the recorded data is periodically read out from the device and stored in a database. If no permanent IP connection should exist between the L-WEB server and the respective LOYTEC devices, the devices can be configured to send trend data automatically as an e-mail attachment to the L-WEB server. Trend data can also be exported as a CSV file (via FTP access), or stored to SD card or USB memory, if the device supports it.

For certain applications, historic values of a given base data point, both recent and far into the past, can be of interest. This can be accomplished with historic filters. They allow processing historic values of the base data point according to a filter function. One or more such functions can be defined per base data point. The result of the historic filter is written to "historicFilter" property relations. For each historic filter function, a time period can be defined at which the base value is sampled, e.g., every first of the month at midnight, and how many samples ago. Historic filters can be created for any analog, binary, or multi-state data point. It is not necessary to create a trend log.

# Functions

## Communication

### E-mail notification



The integrated e-mail client allows for the transmission of messages based on a timely basis or triggered by events. Message texts can be multi-line and consist of static text and variable placeholders, which are evaluated at the time of transmission and insert values into the text. Furthermore, alarm logs and trend logs can be automatically transmitted as e-mail attachments in CSV file format.

The number of transmitted e-mails can be limited. Using a trigger data point, the e-mail transmission can be invoked on a timely basis or event-based. In case an e-mail could not be delivered, retransmissions are tried every 30 minutes up to 24 times.

### Ethernet (Ethernet Switch)




Ethernet summarizes a variety of networking technologies, software (protocols) and hardware (cable, hubs, interface cards, etc.) for wired, local area networks (LANs). Originally published in 1983 as the IEEE 802.3 standard, Ethernet has evolved to today's most used LAN technology. As a packet-switched network, Ethernet belongs to the layers 1 and 2 of the ISO/OSI layer model and defines addressing and media access. Ethernet is a common basis for networking protocols such as TCP/IP and UDP/IP and is able to multiplex several application protocols at the same time (e.g. HTTP, FTP, IP-852, BACnet/IP, KNXnet/IP).

LOYTEC devices with an Ethernet interface use 100Base-T (Fast Ethernet) at 100 Mbit/s and an RJ45 jack.

LOYTEC devices featuring two Ethernet ports can either be configured to use the internal switch to interconnect the two ports or every port is configured to work in a separate IP network.

When the Ethernet ports are configured for two separate IP networks, one port can be connected for instance to a WAN (Wide Area Network) with enabled network security (HTTPS) while the second port can be configured to be connected to an insecure network (LAN) where the standard building automation protocols like BACnet/IP, LON/IP, or Modbus TCP are present. These devices also feature firewall functionality of course to isolate particular protocols or services between the ports.

Using the internal switch, a daisy chained line topology of up to 20 devices can be built, which reduces costs for network installation. The IP switch also allows the setup of a redundant Ethernet installation (ring topology), which increases reliability. The redundant Ethernet topology is enabled by the Rapid Spanning Tree Protocol (RSTP), which is supported by most managed switches.

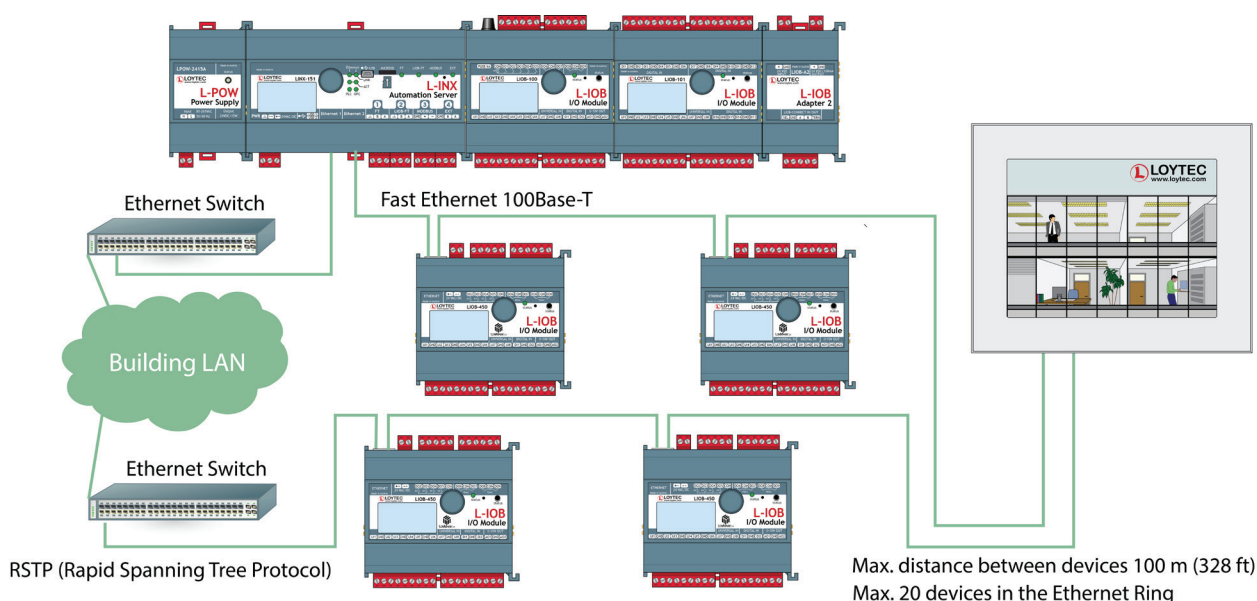

## Functions

### Network Security



Integral part of the LOYTEC hardware is a configurable firewall, which can be enabled and configured over the built-in web server, over OPC XML-DA, or OPC UA. The built-in web server is accessed via the secure HTTPS protocol. A pre-installed certificate allows a quick setup and can later be replaced by a locally generated certificate or by a certificate issued by a certification authority. Data communication is encrypted by TLS encryption methods. The use of secure certificates prevents man-in-the-middle attacks. Furthermore, the OPC UA server provides a secure alternative to OPC XML-DA. It uses the installed server certificate and authorizes OPC clients by certificates.

### BACnet



BACnet (Building Automation and Control networks) is a standardized communication protocol for building automation (ISO 16484: Building automation and control systems – Part 5: Data communication protocol). It was developed at the end of the 1980s by the American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE). Communication in the network is modeled on BACnet objects, which are exposed as server objects by a BACnet device. Other BACnet devices connect as clients to those BACnet server objects. The network integration is accomplished by vendor-specific configuration tools.

LOYTEC devices with a BACnet interface expose data via BACnet server objects (binary, analog, multi-state) and communicate through client mappings. Change-of-value (COV) events can trigger the transmission of values. The AST™ functions are available for BACnet scheduler, calendar, trend log, and notification class objects. Devices are connected to the BACnet network over BACnet MS/TP (twisted pair based on RS-485) or BACnet/IP (100Base-T Ethernet). BACnet objects are created in the LOYTEC Configurator tool using EDE import, online network scan, or manual creation.

As a default, BACnet objects use the ASCII character encoding on the device. This applies to the properties object name, object description, active/inactive text, state text, etc. Most third-party tools are compatible with this setting. To support international character sets, LOYTEC devices can be switched to use the encodings ISO 8895-1 (good for most Western Europe) or UCS-2 (good for Unicode character sets used in Japan).

All LOYTEC products with the BACnet/IP interface can act as BACnet time masters. It is possible to use the BACnet services TimeSynchronization and UTCTimeSynchronization in order to send out time synchronization events. This happens after a power-on reset of the device, when the system time is changed, or periodically. The system time on IP-based LOYTEC devices can be synchronized via NTP (Network Time Protocol), which allows the LOYTEC device – as a BACnet time master – to synchronize all registered BACnet devices in the network to the NTP time.

LOYTEC BACnet routers and BACnet devices with an integrated router can also function as a BACnet MS/TP slave proxy. A slave proxy answers BACnet Who-Is broadcast requests sent to slave devices on the MS/TP bus on behalf of them with appropriate I-Am packets. This covers the shortcoming of BACnet slave devices, which by definition cannot initiate communication by themselves. Using this feature, it is possible to find MS/TP slave devices in a BACnet network scan, which would not be possible without the slave proxy. LOYTEC BACnet routers, BACnet devices with an integrated router and L-GATE Gateways also have a built-in BACnet broadcast management device (BBMD) for managing BACnet/IP Internetworks that span across IP routers. BACnet models without the router function can register as a foreign device (FD) with other BBMDs.

BACnet devices with the BACnet MS/TP interface provide an additional remote MS/TP protocol analyzer. BACnet MS/TP packets are captured and can either be transmitted online to a Wireshark analyzer (sniffer program for analyzing network protocols available free of charge) or stored offline as a capture file on the device. This file can be downloaded over the web interface and opened later in Wireshark.

Other BACnet details such as the BACnet standardized device profile, the supported BIBBs (BACnet Interoperability Building Blocks) and the object properties are specified in the respective PICS (Protocol Implementation Conformance Statement) document. Apart from this, most LOYTEC devices are BTL-certified products that support the BACnet Building Controller (B-BC) profile (see also the related product descriptions).

### BACnet Operator Workstation (B-OWS)



A BACnet Operator Workstation is designed to provide an operator with all the information and editing ability needed for managing a system on a daily basis. In addition to viewing and editing selected BACnet object, an Operator Workstation can display trends, schedules, and other specialized objects. It can also display reports and graphics. A BACnet Operator Workstation will notify the operator that an alarm has occurred, lets the operator acknowledge the alarm, provides a summary of alarms, and allows to adjust the alarm thresholds of analog objects.



## Functions

### CEA-709



By the end of the 1990s, LON (Local Area Network) was standardized by the Consumer Electronics Association (CEA) under the title "Control Network Protocol" as CEA-709. Today, the CEA-709 protocol is a recognized international communication standard, namely ISO/IEC 14908. LOYTEC is highly experienced in the CEA-709 technology. LOYTEC developed its own technology to make devices talk on CEA-709 networks. LOYTEC technology includes chip sets and also the fully featured ORION Protocol stack which executes the CEA-709 protocol on powerful 32-bit micro controllers. All LOYTEC devices supporting CEA-709 connectivity make use of this powerful technology. Communication Objects (Network Variables) and functional profiles, standardized by LonMark International ([www.LonMark.org](http://www.LonMark.org)), describe the communication interface of a LonMark device. Configuration properties (CPs) allow downloading and modification of device parameters. Network integration is accomplished by a network management tool, which is independent of the hardware manufacturer (e.g. NL220 or LonMaker) and is used for device installation and creation of bindings between network variables, which are stored in a database. This allows for a clear separation between the application and the communication relations in the network. Configuration tools specific to LonMark nodes integrate as plug-ins into the network management tool and allow for fast and simple device configuration.

LOYTEC devices can be used in LonMark Systems with standard network variable types (SNVT) or user-defined network variable types (UNVT). The NVs can be created as static or dynamic network variables. Additionally, network variables of other LonMark nodes can be brought in via "external NVs", which are polled in a cyclical manner and written explicitly, without allocating and binding static or dynamic NVs on the LOYTEC device. LOYTEC devices also offer direct access to configuration properties of other LonMark nodes (using LonMark file transfer or read memory access methods). Both standard configuration property types (SCPTs) and user-defined configuration property types (UCPTs) are supported. Network variables are created in the Configurator tool (plug-in) by importing from a XIF file, scanning an LNS database, scanning a network online, or by manual creation. The AST™ functions alarming (alarm management) and scheduling are supported by using the respective LonMark profiles. Historic trend data can be logged by generic trend logs, which are technology-independent. Connectivity to the LonMark System is provided via IP-852 (100Base-T Ethernet) or TP/FT-10 channel with twisted pair or power line link. A sub-group of the LOYTEC devices is also LonMark certified (see product details).

### DALI



DALI (Digital Addressable Lighting Interface) is a protocol for lighting control. It is standardized in Annex E of IEC 60929 and in the IEC 62386 standard. DALI is used as a lighting control sub-system for dimming and switching ballasts with a DALI interface. The ballasts can be controlled and queried independently via DALI short addresses. Also DALI groups can be freely assigned for controlling lighting scenes. The bi-directional communication allows DALI ballasts to report operational parameters and errors. Although DALI buttons and DALI multi-sensors are not covered by the DALI standard, they are interoperable depending on the manufacturer. The DALI standard specifies the testing of emergency lighting systems with a DALI interface. In a DALI system, the DALI master controls and queries the DALI devices in a master/slave manner. The multi-master capability also allows multiple DALI masters on the channel.

LOYTEC devices with a DALI interface can be integrated in a DALI network as DALI masters with a constant light controller (CLC) function. The configuration is done via the built-in web interface or for some models via the Configurator tool. AST™ functions for alarming (alarm management), scheduling, and trending (historical data recording) are also supported. As a DALI master, the devices can be installed autonomously. For the integration in building automation systems, the LOYTEC DALI master is equipped either with a BACnet interface or an interface to LonMark Systems.

### DALI-2



The newer DALI-2 standard also covers switches, multi-sensors, bus power supplies, and control systems in addition to luminaires or ECGs. DALI-2 devices must be certified by the Digital Illumination Interface Alliance (DiiA) to be entitled to carry the DALI-2 logo. The DALI-2 certification promises significantly improved interoperability and additional functionality compared to older DALI systems on the market (version 1). LOYTEC recommends to use preferably DALI-2 certified devices. DALI and DALI-2 devices can be used simultaneously within one DALI channel.

### EnOcean



EnOcean is a radio protocol for wireless products in building automation and is defined in the international standard ISO/IEC 14543-3-10. Switches, like sensors with EnOcean technology just need little energy for sending short radio signals. The energy is mainly produced from piezoelectricity during switching (energy harvesting), the energy of solar panels, or Peltier elements. This energy is sufficient for a batteryless, hence maintenance free operation of the sender. The wireless protocol is geared to transfer information energy efficiently yet highly reliable. Frequency bands with regional differences are used. Europe: 868.3 MHz, US/Canada: 902 MHz (also 315 MHz), and Japan: 928 MHz.

For the integration of EnOcean radio switches and sensors into LOYTEC devices with EnOcean support, an EnOcean interface of the LOYTEC product family L-ENO is necessary. The L-ENO interface is simply connected via a USB cable. Also the energy for the EnOcean interface is supplied via USB likewise automatic detection.

## KNX



KNX is a communication protocol for building automation, which has been standardized internationally as ISO/IEC 14543-3 "Home Electronic Systems". KNX is used in the field of home automation and commercial building automation as well. In a KNX network, sensors and actuators are assigned to a set of communication objects. A communication object represents a value of a given type, for instance a temperature, a switch state, or a set point. The communication objects communicate via group addresses. Sensors transmit a message containing the current value to all actuators, which are member of the same group. In order to make devices of different manufacturers interoperable, the communication objects use a pre-defined set of standardized data point types (DPTs). Network integration in a KNX system is accomplished by a vendor-independent installation tool based on a database (ETS – Engineering Tool Software).

LOYTEC devices are integrated into the KNX system by exporting the database of communication objects from the Engineering Tool Software (ETS4/ETS5). ETS projects are imported by the LOYTEC Configurator tool. After the import of the KNX project, an overview of all available KNX data points is displayed. The desired data points for use can be chosen from this list. Later changes to the ETS project can be tracked and synchronized the same way. Once KNX data points have been integrated, they can be used for AST™ functions. The alarming (alarm management) is based on generic alarm servers. Scheduling of KNX data points is done using generic schedulers. Historic trend data of KNX data points can be logged by generic trend logs. The device communicates with the KNX system on KNX TP1 (twisted pair using an external KNX coupler) and on KNXnet/IP (Ethernet).

## M-Bus



The M-Bus (Meter-Bus) is an established European standard (EN 13757-2, EN 13757-3) for remote meter reading. The M-Bus is a serial bus and employs a master/slave architecture. The M-Bus master can request data from several slaves (meters) on the network. The data transfer from master to slave is a voltage-modulated signal. The transfer from slave to master is a current-modulated signal. M-Bus devices can be bus-powered. The maximum number of nodes, which can be powered on the bus, depends on the M-Bus transceiver.

LOYTEC devices with M-Bus support are M-Bus masters and require an external transceiver for the integration of M-Bus meters. M-Bus data points can be created from an online network scan or offline by using M-Bus device templates, which have been previously created. The assignment of primary addresses to the M-Bus devices can be done in the Configurator tool. AST™ functions for alarming (alarm management), scheduling, and trending (historic data recording) also apply to M-Bus data points. Especially the historic data logging and cyclic polling of values is optimized for M-Bus meters.

## Modbus (TCP, RTU)



Modbus is an open protocol and a de facto standard in the industry, which is based on a master/slave architecture. It was originally designed at the end of the 1970s for exchanging data between PLCs. Today, Modbus is still a widely used interface for integrating field devices into a system. Modbus devices communicate over a serial interface or over TCP/IP. Modbus TCP specifies communication over TCP/IP and is part of the IEC 61158 standard. Modbus devices use registers for data exchange, which are characterized by register type, address, and length. In addition, data type and byte order need to be specified in order to interpret Modbus data. The configuration is done by vendor-specific tools.

LOYTEC devices with a Modbus interface provide two communication methods: Modbus TCP (Ethernet TCP/IP) and Modbus RTU (Remote Terminal Unit, based on RS-485). A Modbus interface can be operated either as a master or as a slave. The supported register types are: Read Discrete Inputs (2), Read Coils (1), Write Coils (5), Read Input Registers (4), Read Holding Registers (3), Write Holding Registers (6). For third-party integration, the vendor's datasheet needs to be consulted in order to manually create a configuration. The Modbus technology does not offer a method for scanning this information online, as it is known from other technologies. For Modbus devices that are online, the manual configuration can however be tested via an online test function. By looking at the extracted values, the respective data points can then be configured accordingly. Modbus device templates can be created, which allows the re-use of Modbus configurations and reduces errors in configuration. AST™ functions for alarming (alarm management), scheduling, and trending (historic data recording) also apply to Modbus data points.

## MP-Bus



The MP-Bus controls HVAC actuators for dampers, regulator valves or VAV air volume controls. It is a master/slave bus developed by Belimo®. There are no restrictions with respect to network topology. Permissible topologies include star, ring, tree and mixed configurations. The MP-Bus (multi point bus) consists of three conductors 24 V (AC or DC), GND and the MP data line.

# Functions

## SMI



The Standard Motor Interface (SMI) is a bus protocol used to control SMI sunblind motors for shading. On closer examination, the SMI is a digital interface with the benefit to parallelize the connection of roller shutters and sun protection drives. Furthermore, the automation controller gets feedback from the drives and the possibility of flexible parameterization. This allows telegrams to be exchanged over the consistent interface, from the controller to the drive and vice versa. SMI drives from different manufacturers are compatible with each other. For drives that operate on mains voltage, the drive and controller are connected by a 5-core cable which both supplies power and transmits data. Distances of even up to 350 m between the controller and drive are possible. Up to 16 drives per SMI channel can be connected. In this way, the hardware expense is reduced significantly in comparison with today's conventional technology, and the drive status can be queried by the sun protection controller.

The roller shutters and sun protection installations with SMI-drives can also be set up for operation without using a controller. The SMI drive has a setup mode. This mode can be activated using simple push buttons. The standard interface is also available for low-voltage drives. This means that interior sun protection installations can also be controlled intelligently and accurately. Low-voltage drives can be recognized by the SMI LoVo symbol.

## OPC XML-DA



OPC is a de facto standard for interoperable communication in the automation industry, which is also often used for data exchange between management level and automation level in building automation. OPC is a set of different specifications and versions, which can be implemented independently of each other.

LOYTEC devices that support OPC have a built-in OPC server following the OPC XML-DA specification. When integrating the different communication technologies (CEA-709, BACnet, DALI, M-Bus, Modbus, KNX, etc.), OPC tags are automatically created without additional engineering effort and exposed via a web services. The OPC server provides data access via web services according to XML-DA, which are available over the same TCP port as the built-in web server. The OPC server exposes simple data points and complex AST™ functions as OPC tags for alarming (alarm management), scheduling, and trending (historic data recording). Since the OPC XML-DA standard does not specify corresponding tags for these functions, the OPC XML-DA server uses groups of OPC tags for exposing AST™ functions. Because web services are built for being routed across the Internet, the built-in OPC XML-DA server uses basic authentication for protection against unauthorized write access. Authentication requires the operator user and the respective password.

The L-WEB System uses OPC XML-DA communication (web services) for data exchange with LOYTEC devices. This allows for a hassle-free communication in the Intranet or Internet across firewalls and NAT routers. Also third-party applications such as SCADA systems can communicate as OPC XML-DA clients over the Intranet or Internet and access the built-in OPC server in a simple and secure way. The embedded OPC servers do not require extra PC hardware and can be distributed in the IP network.

## OPC UA



The OPC server on LOYTEC devices, which support security, also features the OPC UA binary protocol, that exposes the same OPC tags as the OPC XML-DA server. OPC UA offers superior security features and also slimmer data transfers.

## CEA-709 Router Function



The CEA-709 router function allows the transparent connection of two LonMark channels in a LonMark System. One of the channels can be a LonMark IP-852 (Ethernet/IP) channel. LOYTEC devices featuring IP-852 routing have a built-in IP-852 configuration server to configure and manage all IP-852 members on the channel.

## BACnet Router Function



The BACnet router function allows the transparent connection of one BACnet/IP channel and one BACnet MS/TP channel. In addition, the router function implements a BACnet Broadcast Management Device (BBMD) and features Foreign Device support. For MS/TP slave devices it acts as a slave proxy.



## Remote Access



LOYTEC devices offer remote access functions, which differ depending on the device model. All device settings can be modified, data point values can be queried, and configuration parameters can be modified. Apart from this, backup and restore of the device configuration is available. The same applies to parameters. Access to AST™ functions for alarming (alarm management), scheduling, and trending (historic data recording) is also supported, including reading out alarm logs and trend logs from the device via file transfer. The devices offer various analysis functions and statistical data for troubleshooting the used communication protocols. Programmable LOYTEC devices also provide online test functions for developing application programs.

## Remote Network Interface (RNI)



The Remote Network Interface (RNI) function is available, if the LOYTEC device is configured to operate on the TP/FT-10 channel. In this mode, the LOYTEC device appears as a LOYTEC network interface and thus enables remote access to the TP/FT-10 channel over an Ethernet/IP connection. The network interface can be used together with LNS-based tools such as NL220 or LonMaker, or as a native LOYTEC network interface. Furthermore, the RNI offers the “remote LPA” (LOYTEC Protocol Analyzer) feature for remote troubleshooting.

## Wireless Local Area Network (WLAN)



WLAN refers to a local wireless radio network compliant to the common Standard IEEE 802.11. It extends all protocols of the wired Ethernet of corresponding LOYTEC devices to a wireless communication.

For network integration into a WLAN, the corresponding LOYTEC devices need to be connected with an L-WLAN interface via USB. The USB bus supplies the L-WLAN device with energy and enables an automatic detection. It is also possible to connect the LOYTEC device with an existing WLAN Access Point, create a WLAN Access Point, or build up a Mesh network according to the IEEE standard 802.11s. The relatively new and emerging standard for Mesh networks offers numerous advantages. A major benefit of a mesh network is its autonomy. Devices which are configured as mesh point devices unite autonomously to one network in which Mesh points communicate via other Mesh points. To encrypt a WLAN network, the encryption methods WEP, WPA, and WPA2 are available. The Mesh network is encrypted via simultaneous authentication of equals (SAE), comparable to WPA2.

## Gateway

### Gateway Function



The gateway functions allow data exchange between all available communication technologies. This is accomplished by using “connections” which connect data points of different technologies with each other. Both “1-to-n” and “m-to-1” connections are supported. Connections can contain simple or complex calculations. Different engineering units of connected data points are automatically converted. Connections can easily be created using templates. They are distinguished into local and global connections. Connections can be created manually or automatically using the Smart Auto-Connect™ feature of the Configurator tool. Especially the automated creation of connections reduces engineering effort and helps preventing configuration errors.

The Smart Auto-Connect™ feature works on a selection of source data points and creates target data points and the respective connections. In principle, Smart Auto-Connect™ can work with all available communication technologies as sources. However, only select technologies can be used as targets. Depending on the availability on the device model, data points can be created for the following technologies: CEA-709 (static NVs), BACnet (server objects), Modbus (slave registers) and user registers. A remarkable feature in this context is the automatic mapping of network variables to BACnet objects according to CEN/TS 15231:2005.

### Local Connection



A “local connection” is used for connecting data points of different networking technologies, which are integrated on a single LOYTEC device.

# Functions

## Global Connection



“Global connections” provide similar functions as local connections, but can span across an IP network between two or more LOYTEC devices. A global connection creates a data cloud with a system-wide name. Data points which are added to a global connection can send values into the cloud or receive values from the cloud. This is entirely independent from the installation location or the original communication technology.

## L-IOB I/O

L-IOB I/O Modules extend the L-INX Automation Servers, IP-capable L-IOB I/O Controllers, and L-ROC Room Controllers by adding physical inputs and outputs. Models with different I/O configurations and communication interfaces are available. L-IOB I/O Modules with LIOB-Connect can be directly connected in a daisy-chain. Those L-INX Automation Servers and L-ROC Room Controllers that support this feature, automatically detect which I/O modules are connected and map the corresponding data points. All L-INX and L-ROC models provide an additional way for connecting and integrating L-IOB I/O Modules via LIOB-FT (twisted pair) and L-IOB IP (Ethernet). L-IOB IP I/O Controllers are limited to the use of one additional L-IOB IP I/O Module.

## LIOB-Connect



The LIOB-Connect port of a L-INX or L-ROC device allows connecting LIOB-10x Modules and provides a power and communication path without additional cabling. Regardless of the L-IOB type, up to 24 L-IOB I/O Modules are supported. This makes up to 24 LIOB-10x devices possible in a daisy chain. The first four LIOB-10x can be connected directly. Starting with the fifth LIOB-10x, the LIOB-Connect chain needs to be divided into two (or more) segments using LIOB-A4 and LIOB-A5 adapters.

Parameterization of the I/O modules is done by the Configurator software or over the web interface of the L-INX or L-ROC device. All parameter data is stored on the L-INX Automation Server or the L-ROC Room Controller and can be downloaded to the L-IOB Modules again if needed. When replacing a L-IOB Module, it is detected and integrated again automatically.

## LIOB-FT



The LIOB-FT port allows operation of remote LIOB-15x Modules. These are connected by twisted pair cabling of up to 500 m length in free topology or more than 500 m in bus topology. The maximum number of supported LIOB-15x Modules depends on the L-INX Automation Server model, the L-IOB IP I/O Controller model, or the L-ROC Room Controller model.

Parameterization of the I/O Modules is done by the Configurator software or over the web interface of the L-INX, L-IOB IP or L-ROC device. All parameter data is stored on the L-INX Automation Server, the L-IOB IP I/O Controller, or the L-ROC Room Controller and can be downloaded to the L-IOB Modules again when needed. When replacing a L-IOB Module, it is detected and integrated again automatically.

## LIOB-IP



The LIOB-IP port allows operation of remote LIOB-45x and LIOB-55x Modules. These are connected over Ethernet/IP (100Base-T). The maximum number of supported Modules depends on the L-INX Automation Server model, the L-IOB IP I/O Controller model, or the L-ROC Room Controller model. Communication across NAT routers is not supported.

Parameterization of the I/O Modules is done by the Configurator software or over the web interface of the L-INX, L-IOB IP, or L-ROC device. All parameter data is stored on the L-INX Automation Server, the L-IOB IP I/O Controller, or the L-ROC Room Controller and can be downloaded to the L-IOB Modules again if needed. When replacing a L-IOB Module, it is detected and integrated again automatically.

## Local I/Os



All L-IOB I/O Controllers are equipped with local I/Os. The usage of local I/Os is completely transparent to the application. For the device's logic program, it does not matter if the I/Os are local or remote. Parameterization of the Local I/Os is done by the Configurator software or over the web interface of the L-IOB I/O Controllers.

## Programming Functions

### IEC 61131 – L-LOGICAD



The development of an application program is done in the graphical programming environment L-LOGICAD (IEC 61131-3 standard), which offers programming languages using function blocks (FBs) or structured text (ST). It is possible to mix programming languages within the same project. The IEC 61131-3 programming software allows an online test of the application over the Ethernet/IP network or the TP/FT-10 channel (depending on the hardware). IEC 61131-3 applications can be modified without interrupting execution. L-LOGICAD offers a variety of tools for diagnosis and debugging, commissioning, and additional service function blocks (e.g. force update). Errors can be detected early when developing the function plan in the integrated, graphical offline simulation. Oscilloscope and logic analyzer functions allow a timely display of the respective values. Apart from this, watch pages can be added for visualization and modification of run-time values. L-LOGICAD can access all data points and parameters on the device and process them in the logic program. The program operates independently of the underlying communication technology or the underlying L-IOB I/Os respectively.

### IEC 61499 – L-STUDIO



The application project is created with the graphical programming system L-STUDIO (IEC 61499 standard), which allows programming using function blocks (FBs). In L-STUDIO, the programming environment comprises the entire project, where each controller in the IP network is treated as a computing resource with data points. L-STUDIO deploys the application to the networked controllers and creates the connections between them automatically. Event-oriented execution of the program allows for fast reaction times. As a novel approach to automation we name this "Cloud Control". An arbitrary set of functions can be mapped to a cloud of controllers. The strictly object-oriented programming method allows for efficient reuse of previously implemented functions. A variety of debugging and watch functions allows for building-wide troubleshooting during run-time.

### IEC 61131 – L-STUDIO



L-STUDIO has established itself as an integration platform for the L-ROC system for individual room control installations. With the new version L-STUDIO 3.0, LOYTEC is now taking the next step and extending the programming function by a development environment in accordance with the industry standard IEC 61131.

## Mathematical Functions



Math objects with user-defined formulas can execute mathematical functions on data points. A math object uses a number of data points as input variables ( $v_1, v_2, \dots, v_n$ ) and calculates a result according to the formula. The result is written as an output to a number of data points. The calculation is executed each time one of the input data points changes its value. A result is calculated only if all inputs have a valid value.

## Device Management

### Backup / Restore



Depending on the device model, there exist several possibilities to backup and restore a device configuration. In principle, all LOYTEC devices with a built-in web server offer the backup and restore function on the web interface. Also the Configurator tools provide this function for their respective device models. When using the L-WEB System, backups of device configuration can be created on a timely basis (e.g. once a day) and restored easily when needed. Devices with SD card support and USB port allow a device backup onto external storage. In this case, the backup and restore function is operated locally on the LCD display. In all cases, the LOYTEC device is restored with all data points, dynamic NVs and bindings, BACnet server objects and client mappings, etc. The device appears again as commissioned and online and is fully functional in the network. In case an LNS-based tool is used, the LNS device needs to be replaced, which can be done at a later time.

# Functions

## Device Manager



LWEB-900 gives a clear overview of the status of all devices and provides detailed information for each device (e.g. device type, name, IP address, firmware version, configuration file, program file, etc.). A firmware update can be performed for individual devices or groups of devices. A backup feature ensures a regular backup of all relevant device configurations. If a defective device needs to be replaced, the configuration can be easily restored. Depending on the device hardware, the restore operation can be initiated either from the LCD UI of the device or from the LWEB-900 Client.

## Device Configuration



LWEB-900 manages and configures all LOYTEC devices based on a central database. The required device configuration software can be opened directly in LWEB-900 and the configuration files are stored in the data base.

## AKS – Identification Keys



Each data point is uniquely identified by its name and path. With LWEB-900, you can define your own identification key schema and assign identification keys (IK) to each data point. The IK schema can be exported and imported into other LWEB-900 projects.

## SNMP



The built-in SNMP server (Simple Network Management Protocol) provides network management information of a device that can be used by customary IT tools. Via a configurable SNMP agent, status information and statistics with standard MIBs (Management Information Bases), system registers, and all OPC-exposed data points can be read and monitored, and also alarms can be sent.

## Visualization / Operate and Monitor

### Local Manual Operation



The LOYTEC device is equipped with a graphical LCD display (128x64) and a jog dial, which can be used for monitoring, testing, and configuration. The backlight is automatically turned off after 30 minutes of jog dial inactivity. Access to the display can be protected by a PIN code. The display can show the current device configuration and allows its modification. All basic settings (IP address, BACnet ID, etc.) can be made on the LCD display.

Apart from configuration, L-INX Automation Servers and L-GATE Gateways with a graphical LCD display allow operating trend data backup to external storage (SD card or USB stick) and backup/restore of the entire device configuration. Also the state of the integrated data points can be displayed and modified. Remote access to the LCD display over an Ethernet/IP connection is made possible by the VNC protocol.

In L-IOB I/O Modules and Controllers, the graphical LCD display allows – apart from modifying the configuration – access to physical I/O data points and parameters. The data point state is displayed as a value and engineering unit, as a status text, or showing dynamic symbols. Inputs and outputs can be switched to manual mode on the display and thus be decoupled from the physical input or the output value from the logic application.

### VNC



The VNC (Virtual Network Computing) service offers password-protected remote access to the LOYTEC device. VNC employs a client-server model. The VNC server is a built-in component of the LOYTEC device. A great variety of free or commercial VNC clients is available on the market for different platforms. Which functions and views are exposed over VNC depends on the device.

## Web Server for Device Configuration



The web interface on LOYTEC devices with a built-in web server provides an alternative to the Configurator tool for the maintenance personnel. It can be used to configure device and communication settings. It also provides extensive statistical information on the used communication protocols for analysis and troubleshooting. Backup and restore can also be operated on the web interface.

LOYTEC devices with an Ethernet/IP interface display data point values and states on the web interface coming from different communication networks or registers. The display contains a data point list, a tree view, and a breadcrumb navigation for fast access to subdirectories. The data point list shows the data point name, direction, type, data point state, the current value, and a description. All values are updated live. Data points can also be modified on the web interface.

On LOYTEC devices with L-WEB support, all available graphical user interfaces are listed on the web interface and can be started with a mouse click. LOYTEC devices with AST™ functions (Alarming, Scheduling, and Trending) offer access to those functions over the web interface.

An alarm summary page displays all currently active alarms of alarm data points, which can also be acknowledged, if configured so. The web interface also provides access to a historical alarm log, which lists alarms and acknowledgements. If an inactive, acknowledged alarm disappears from the alarm summary page, the last transition is stored in the alarm log. The content of the historic alarm log can be exported to a CSV file on the web interface.

The web interface provides a scheduler page, which allows modification of schedules and calendar entries for exception days during run-time. For existing local schedulers, the web interface supports the re-configuration of the scheduled data points. The changes become effective immediately and don't require a reboot of the device. For adding or removing data points to or from a scheduler, no reboot is necessary either.

The trend log configuration page on the web interface allows the reconfiguration of existing trend logs during run-time. This also includes the assignment of new data points. The changes become effective immediately and don't require a reboot of the device. The trended data can be exported into a CSV file over the web interface.

## LWEB-900



The LWEB-900 Building Management System offers a BACnet Operator Workstation capability to integrate BACnet devices via BACnet/IP. In addition most LOYTEC devices can use the OPC XML-DA web service to get connected to LWEB-900. LWEB-900 is a highly flexible and scalable solution which accompanies you from installation and configuration of LOYTEC devices (L-INX Automation Servers, L-IOB I/O Modules and Controllers with IP connectivity, L-ROC Room Controllers, L-GATE Gateways, L-VIS Touch Panels, L-DALI Controllers), all the way to daily operation of the facilities.

## Graphical View



Graphical views are schematics that help to visualize and operate areas of a building. Each graphical view can consist of a large number of dynamic display elements which reflect the current status of the facilities. LWEB-900 provides the graphical view within the LWEB-900 User Interface of the software and additionally offers distributed LWEB-900 clients the same functionality of visualization through web services.

## LWEB-802/803 Visualization



Most LOYTEC devices can manage and store graphical projects (L-WEB projects). These projects can be created without knowledge of any web-based language within the L-VIS/L-WEB configuration tool. Customized graphical pages with dynamic content can be shown either with LWEB-803 on Windows PCs or with LWEB-802 in a standard browser.



# Functions

## Reporting



LWEB-900 can create reports based on trend logs. Reports can be used, for example, to document the energy consumption in a building. The generation of a report can be triggered in one of the following ways:

Periodically: Reports can be generated daily, weekly, monthly, or yearly.

Event: The change of a data point value can trigger a report.

Manually: A report can be triggered manually by the user.

Reports can be generated in PDF, Excel, or Word format. They can be automatically distributed via e-mail.

## User Management



LWEB-900 provides a separate work environment for each user. A user has to log on to the system and is presented with a perspective tailored to his individual requirements. A perspective defines which windows are open and how they are arranged. In this way, a user can define separate perspectives which are optimized for different tasks and quickly switch between them.

LWEB-900 uses access control lists to define which operations a user can perform on a certain object (e.g. folder, data point, graphical view, parameter view, trend chart). To speed up the access right configuration, access control lists can be inherited from parent to child objects.

## Parameter View



The LWEB-900 parameter view allows configuring operational parameters, which are distributed over multiple devices, efficiently. For example, parameters for room temperature control, light control, or sunblind control can be organized in different parameter views. Each parameter view is a matrix where each cell represents a parameter. Parameters can be organized freely in the matrix depending on space layout and function. In this way, it is possible to e.g. adjust the running periods of sun blinds across many rooms with a few mouse clicks and write the new values reliably into the corresponding automation devices.

## Watch View



The LWEB-900 watch view allows observing data point values in real time. Depending on the data point types, the values can also be changed and easily edited within the watch view. You are able to see what is actually going on in the network.



## L-STAT



The L-STAT is a network thermostat with a modern, minimalistic look that fits any interior design. It is directly connected to a LOYTEC controller with a Modbus interface such as LIOB-AIR or L-ROC.

# L-WEB Building Management & L-STUDIO



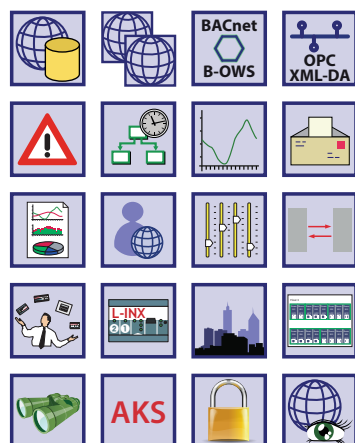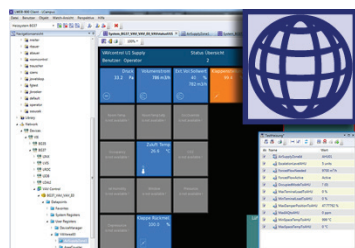


The integrated building management software LWEB-900 provides a user interface to manage and operate a LOYTEC building management system. LWEB-900 is a highly flexible and scalable solution which accompanies you from installation and configuration of LOYTEC devices (L-INX Automation Servers, L-IOB I/O Modules and Controllers with IP connectivity, L-ROC Room Controllers, L-GATE Gateways, L-VIS Touch Panels, L-DALI Controllers), all the way to daily operation of the facilities. Thus, a common user interface for the building automation system is available at all phases of the project.


LWEB-900 uses a client-server model consisting of the LWEB-900 Server and one or multiple LWEB-900 Clients. The LWEB-900 Server manages and stores system and operating parameters, historic data, access rights, and device configurations in an SQL data base. It exchanges real time data with distributed autonomous LOYTEC devices via web services independently of the underlying field bus technology (CEA-709, BACnet, DALI, M-Bus, Modbus, KNX, etc.).

The LWEB-900 Client is the user interface of the building management system. The client can be installed on the same PC as the server or on a remote PC. The use of web services to communicate between clients and server ensures that remote access is easily possible across firewalls and NAT routers. In this way, Intranet and Internet can be used to build distributed building automation systems. In addition, differences between the various field bus technologies are compensated and the user is presented with a consolidated view of the separate communication systems.

To check the status of the buildings technical equipment, there is no need to install the LWEB-900 Client. If you have an IP connection to the LWEB-900 Server, you can use a standard web browser to operate and monitor the building automation system. It makes no difference, whether a smart phone, tablet, or PC is used.

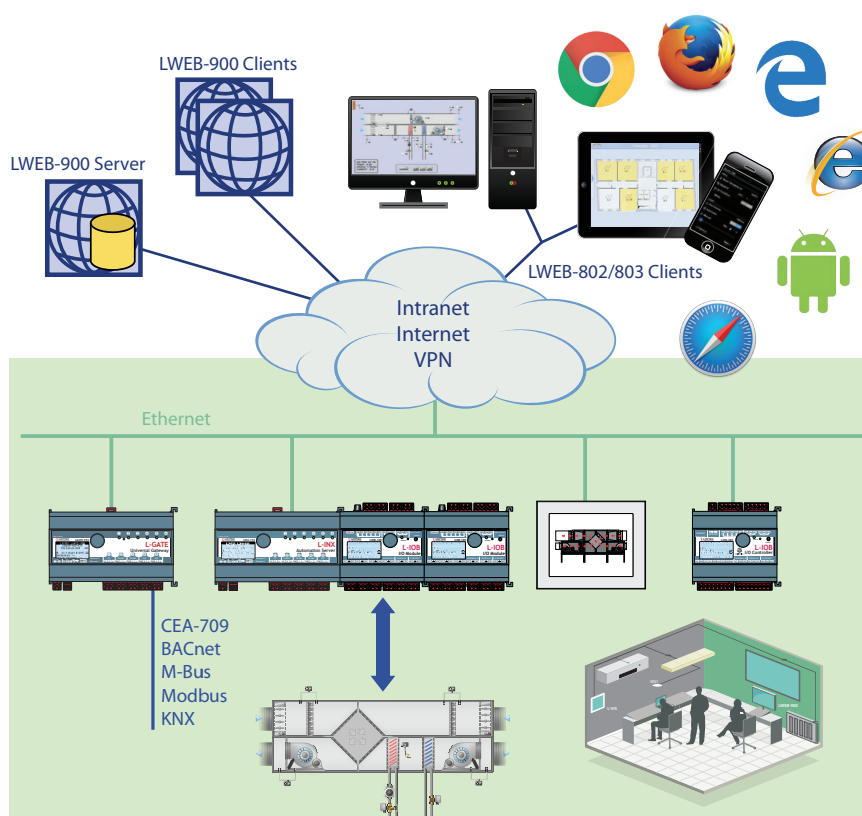



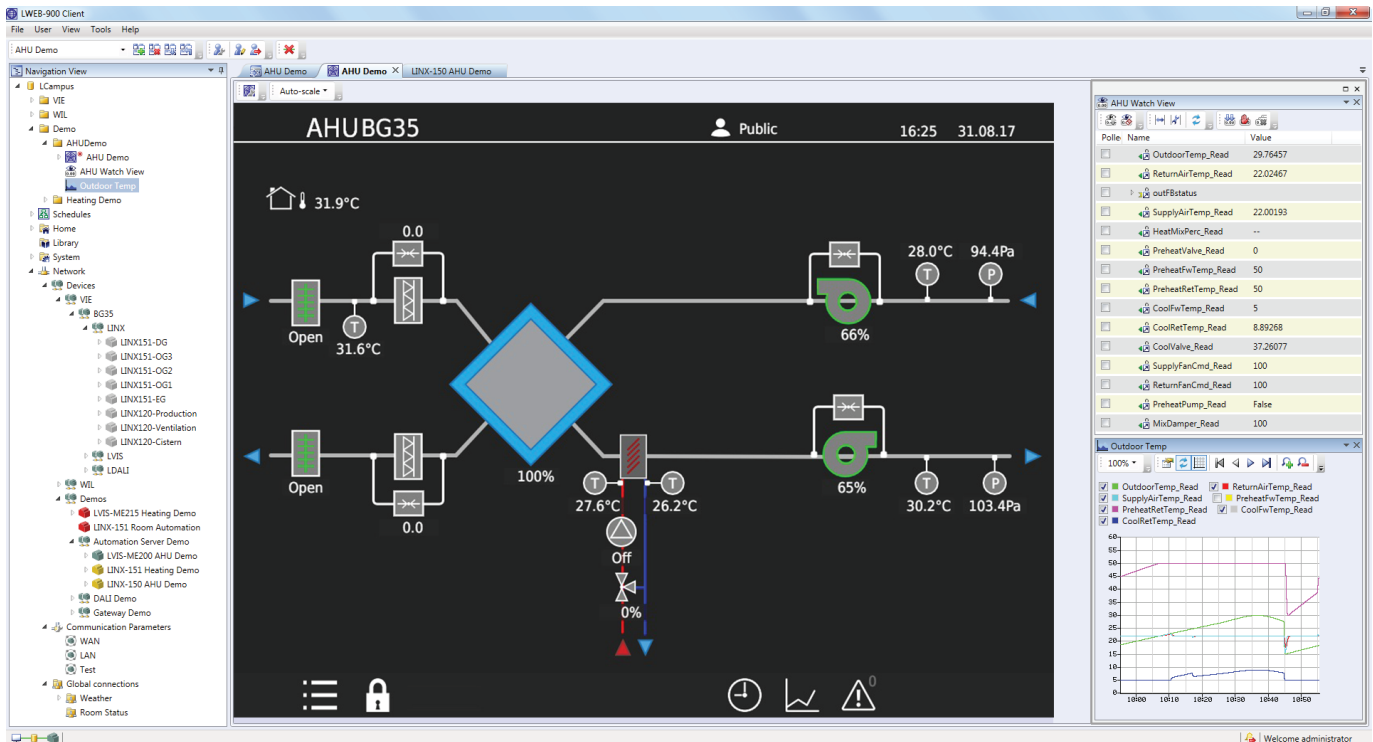

### Visualize and Operate

In LWEB-900, all areas of a building can be visualized and operated using installation schematics. Each schematic can consist of a large number of dynamic display elements which reflect the current status of the facilities in real-time. These display elements also include complex elements like alarms, trend logs, and schedules. The configuration software to design the graphical representation of the installation is built directly into LWEB-900. Basic functions and attractive pages can be created in no time without any know-how in HTML, Java, etc. Dynamic information is shown in the form of numeric values, text, changing icons, bar graphs, trend logs, alarm and event lists, or schedule controls. Pixel graphics in all common file formats (GIF, JPG, BMP, TIFF, PNG, MNG, ICO), vector graphics (SVG) as well as alpha blending are supported.

The LWEB-900 Client adapts to the needs of the user. Dynamic schematics can be displayed in a separate window or they can be arranged in a perspective together with an alarm view, navigation view, and data point watch view.


### Graphical View

Graphical views are schematics that help to visualize and operate areas of a building. Each graphical view can consist of a large number of dynamic display elements which reflect the current status of the facilities. LWEB-900 provides the graphical view within the LWEB-900 User Interface and additionally offers distributed LWEB-900 clients the same functionality of visualization through web services.

### Alarming

With LWEB-900, alarms from different sources can be visualized and managed in a uniform manner. It makes no difference whether an alarm is generated by a L-INX Automation Server to report that a V-belt is torn, by a DALI light controller to report that the emergency light test fails, or by an L-GATE device to report an alarm from a 3rd party system. In LWEB-900, these alarms are presented in a common way which enables the user to maintain an overview. The user can acknowledge or disable alarms. When an alarm occurs, one or multiple receivers can be notified via e-mail. If the alarm is not

| ID | Alarm Time          | Type    | Source Name         | Description         | Device              | Ack. Source         | State                    | Source              |
|----|---------------------|---------|---------------------|---------------------|---------------------|---------------------|--------------------------|---------------------|
| 1  | 2010-03-10 10:10:10 | General | 2010-03-10 10:10:10 | Security Fire Alarm | 2010-03-10 10:10:10 | 2010-03-10 10:10:10 | Active, not acknowledged | 2010-03-10 10:10:10 |
| 2  | 2010-03-10 10:10:10 | General | 2010-03-10 10:10:10 | Security Fire Alarm | 2010-03-10 10:10:10 | 2010-03-10 10:10:10 | Active, not acknowledged | 2010-03-10 10:10:10 |
| 3  | 2010-03-10 10:10:10 | General | 2010-03-10 10:10:10 | Security Fire Alarm | 2010-03-10 10:10:10 | 2010-03-10 10:10:10 | Active, not acknowledged | 2010-03-10 10:10:10 |

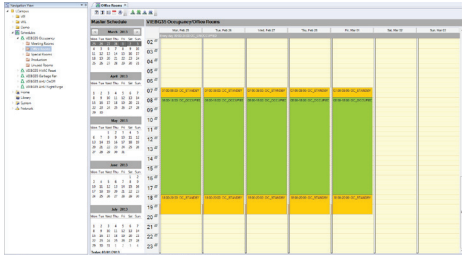

acknowledged within a configurable amount of time, an alternative action can be triggered.


### Scheduling

Schedules can either be executed in LOYTEC devices or directly in the LWEB-900 Server. To optimize the system, the scheduler should be at the same location as the corresponding control logic. For example, an occupancy scheduler should be executed by the L-INX automation controller which primarily uses this information, whereas a scheduler determining which people are notified about alarms should be executed in the LWEB-900 Server. LWEB-900 offers the unique possibility of organizing schedules executed on different devices in a hierarchical way and configuring them efficiently. The user interface is designed for non-technical users and is similar to calendar functions of common office applications. Schedulers are organized in a tree structure. Entries on the highest hierarchical level have an impact on all schedulers. Entries on a lower hierarchical level affect only the schedulers below that level. Local changes on the device are identified and can either be accepted or rejected. After the schedule hierarchy has been defined, LWEB-900 calculates the resulting configurations and if the scheduler is executed decentralized in a LOYTEC device, it downloads them to the corresponding device.




### Trending

LOYTEC devices can record the values of data points over time. However, the memory available on a device is limited. LWEB-900 overcomes this restriction by reading out the trend data from the devices periodically and storing everything in the database. A user can also create ad-hoc trend logs directly in LWEB-900. This is the fastest way to create a trend log. One simply selects a data point and activates trending using the context menu. LWEB-900 periodically polls the data point value from the device and stores the value in the database. If the LWEB-900 Server cannot access the LOYTEC device directly via IP, an alternative communication method is available: the device can automatically e-mail trend data to the server. Trend logs can be viewed either as tables or as charts. Especially for trend charts, a large number of customization options are available. In addition, LWEB-900 allows exporting trend data as CSV files.

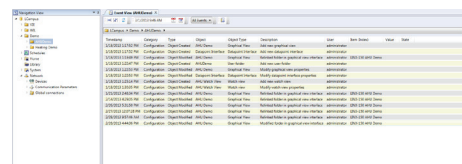

### Event Log


All events are logged by LWEB-900 in the database. Events include alarms, alarm acknowledgements, log-in and log-out of users, change of operational parameter, change of device configuration, system messages, etc. The event log view offers a large variety of filters to efficiently analyze all activities in LWEB-900.

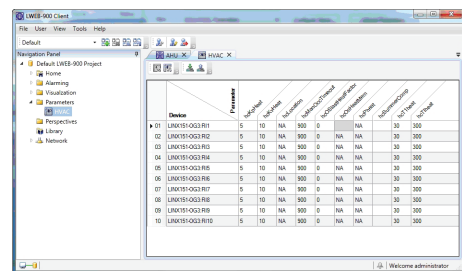

### Parameter View


The parameter view allows configuring operational parameters, which are distributed over multiple devices, efficiently. For example, parameters for room temperature control, light control, or sunblind control can be organized in different parameter views. Each parameter view is a matrix where each cell represents a parameter. Parameters can be organized freely in the matrix depending on space layout and function. In this way, it is possible to e.g. adjust the running periods of sun blinds across many rooms with a few mouse clicks and write the new values reliably into the corresponding automation devices. The parameter view also allows to display real-time values.



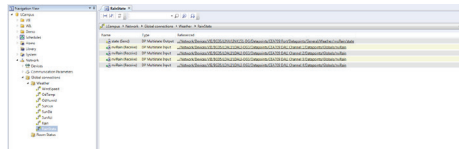


## Global Connections

With LWEB-900 it is easy to connect data points of different LOYTEC devices via Ethernet/IP. For this purpose, a global connection can simply be created and drag and drop can be used to add input and output data points. It makes no difference whether the data points represent physical I/Os of L-IOB devices or data from field bus systems (CEA-709, BACnet, DALI, M-Bus, Modbus, KNX, etc.). LWEB-900 configures all devices which are part of the global connection accordingly. After the connection has been configured, the devices exchange data directly over the IP Network (without LWEB-900).

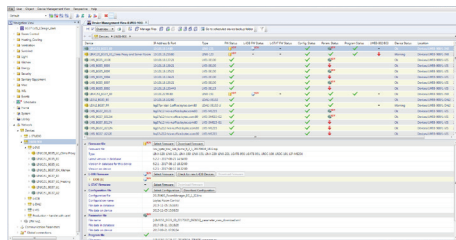

## Device Manager

LWEB-900 gives a clear overview of the status of all devices and provides detailed information for each device (e.g. device type, name, IP address, firmware version, configuration file, etc.). A firmware update can be performed for individual devices or groups of devices. A backup feature ensures a regular backup of all relevant device configurations. If a defective device needs to be replaced, the configuration can be easily restored. Depending on the device hardware, the restore operation can be initiated either from the LCD UI of the device or from the LWEB-900 Client.

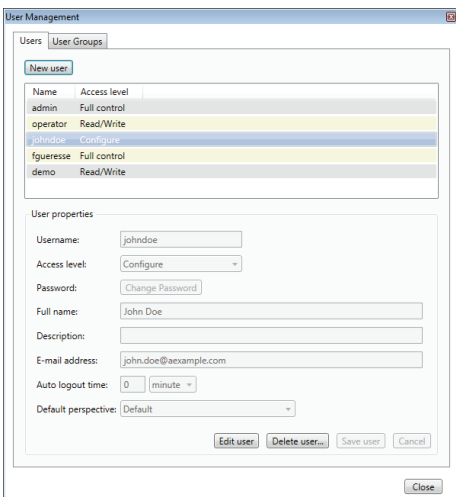


## Device Configuration

LWEB-900 manages and configures all LOYTEC devices based on a central database. The required device configuration software can be opened directly in LWEB-900 and the configuration files are stored in the data base.

## User Management

LWEB-900 provides a separate work environment for each user. A user has to log on to the system and is presented with a perspective tailored to his individual requirements. A perspective defines which windows are open and how they are arranged. In this way, a user can define separate perspectives which are optimized for different tasks and quickly switch between them.

LWEB-900 uses access control lists to define which operations a user can perform on a certain object (e.g. folder, data point, graphical view, parameter view, trend chart). To speed up the access right configuration, access control lists can be inherited from parent to child objects.

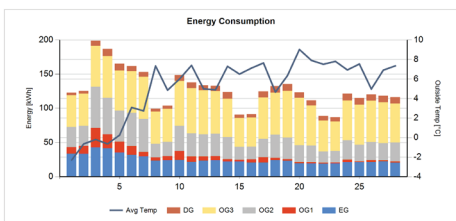



| Timestamp        | EG    | OG1   | OG2   | OG3   | OG4    | Total  | Outside Temp [°C] |
|------------------|-------|-------|-------|-------|--------|--------|-------------------|
| 2013/12/31 23:59 | 11.92 | 6.76  | 45.54 | 3.97  | 135.00 | 197.19 | -2.58             |
| 2014/01/01 00:00 | 33.14 | 11.92 | 29.97 | 47.24 | 3.95   | 126.25 | -0.95             |
| 2014/01/01 00:01 | 42.85 | 23.80 | 40.29 | 40.14 | 7.10   | 154.18 | -2.20             |
| 2014/01/01 00:02 | 41.41 | 20.30 | 55.68 | 61.10 | 16.48  | 186.95 | -0.95             |
| 2014/01/01 00:03 | 34.81 | 19.21 | 45.30 | 59.72 | 9.80   | 169.15 | 0.28              |
| 2014/01/01 00:04 | 34.79 | 17.94 | 40.94 | 60.90 | 7.39   | 161.96 | 0.99              |
| 2014/01/01 00:05 | 29.34 | 6.70  | 48.05 | 62.02 | 7.04   | 153.11 | 2.74              |
| 2014/01/01 00:06 | 29.30 | 6.57  | 22.07 | 67.06 | 6.34   | 101.43 | 7.58              |
| 2014/01/01 00:07 | 23.62 | 6.11  | 20.96 | 45.54 | 4.30   | 100.68 | 6.60              |
| 2014/01/01 00:08 | 24.24 | 13.58 | 36.97 | 65.95 | 8.86   | 149.66 | 6.91              |
| 2014/01/01 00:09 | 21.41 | 7.84  | 24.42 | 65.95 | 8.40   | 127.92 | 7.40              |
| 2014/01/01 00:10 | 20.30 | 6.15  | 32.29 | 64.70 | 7.24   | 131.68 | 5.00              |
| 2014/01/01 00:11 | 20.58 | 6.06  | 30.06 | 62.30 | 7.00   | 132.96 | 4.00              |
| 2014/01/01 00:12 | 21.95 | 3.42  | 32.41 | 58.02 | 10.01  | 132.82 | 7.30              |
| 2014/01/01 00:13 | 21.70 | 2.94  | 16.88 | 42.23 | 4.71   | 88.52  | 8.61              |
| 2014/01/01 00:14 | 20.62 | 4.89  | 16.42 | 42.87 | 4.79   | 91.54  | 7.12              |
| 2014/01/01 00:15 | 20.61 | 7.07  | 27.10 | 60.82 | 8.80   | 104.85 | 7.65              |
| 2014/01/01 00:16 | 21.41 | 7.84  | 24.42 | 65.95 | 8.40   | 127.92 | 7.40              |
| 2014/01/01 00:17 | 20.30 | 6.15  | 32.29 | 64.70 | 7.24   | 131.68 | 5.00              |
| 2014/01/01 00:18 | 20.58 | 6.06  | 30.06 | 62.30 | 7.00   | 132.96 | 4.00              |
| 2014/01/01 00:19 | 21.95 | 3.42  | 32.41 | 58.02 | 10.01  | 132.82 | 7.30              |
| 2014/01/01 00:20 | 21.70 | 2.94  | 16.88 | 42.23 | 4.71   | 88.52  | 8.61              |
| 2014/01/01 00:21 | 20.62 | 4.89  | 16.42 | 42.87 | 4.79   | 91.54  | 7.12              |
| 2014/01/01 00:22 | 20.61 | 7.07  | 27.10 | 60.82 | 8.80   | 104.85 | 7.65              |
| 2014/01/01 00:23 | 21.41 | 7.84  | 24.42 | 65.95 | 8.40   | 127.92 | 7.40              |
| 2014/01/01 00:24 | 20.30 | 6.15  | 32.29 | 64.70 | 7.24   | 131.68 | 5.00              |
| 2014/01/01 00:25 | 20.58 | 6.06  | 30.06 | 62.30 | 7.00   | 132.96 | 4.00              |
| 2014/01/01 00:26 | 21.95 | 3.42  | 32.41 | 58.02 | 10.01  | 132.82 | 7.30              |
| 2014/01/01 00:27 | 21.70 | 2.94  | 16.88 | 42.23 | 4.71   | 88.52  | 8.61              |
| 2014/01/01 00:28 | 20.62 | 4.89  | 16.42 | 42.87 | 4.79   | 91.54  | 7.12              |
| 2014/01/01 00:29 | 20.61 | 7.07  | 27.10 | 60.82 | 8.80   | 104.85 | 7.65              |
| 2014/01/01 00:30 | 21.41 | 7.84  | 24.42 | 65.95 | 8.40   | 127.92 | 7.40              |
| 2014/01/01 00:31 | 20.30 | 6.15  | 32.29 | 64.70 | 7.24   | 131.68 | 5.00              |
| 2014/01/01 00:32 | 20.58 | 6.06  | 30.06 | 62.30 | 7.00   | 132.96 | 4.00              |
| 2014/01/01 00:33 | 21.95 | 3.42  | 32.41 | 58.02 | 10.01  | 132.82 | 7.30              |
| 2014/01/01 00:34 | 21.70 | 2.94  | 16.88 | 42.23 | 4.71   | 88.52  | 8.61              |
| 2014/01/01 00:35 | 20.62 | 4.89  | 16.42 | 42.87 | 4.79   | 91.54  | 7.12              |
| 2014/01/01 00:36 | 20.61 | 7.07  | 27.10 | 60.82 | 8.80   | 104.85 | 7.65              |
| 2014/01/01 00:37 | 21.41 | 7.84  | 24.42 | 65.95 | 8.40   | 127.92 | 7.40              |
| 2014/01/01 00:38 | 20.30 | 6.15  | 32.29 | 64.70 | 7.24   | 131.68 | 5.00              |
| 2014/01/01 00:39 | 20.58 | 6.06  | 30.06 | 62.30 | 7.00   | 132.96 | 4.00              |
| 2014/01/01 00:40 | 21.95 | 3.42  | 32.41 | 58.02 | 10.01  | 132.82 | 7.30              |
| 2014/01/01 00:41 | 21.70 | 2.94  | 16.88 | 42.23 | 4.71   | 88.52  | 8.61              |
| 2014/01/01 00:42 | 20.62 | 4.89  | 16.42 | 42.87 | 4.79   | 91.54  | 7.12              |
| 2014/01/01 00:43 | 20.61 | 7.07  | 27.10 | 60.82 | 8.80   | 104.85 | 7.65              |
| 2014/01/01 00:44 | 21.41 | 7.84  | 24.42 | 65.95 | 8.40   | 127.92 | 7.40              |
| 2014/01/01 00:45 | 20.30 | 6.15  | 32.29 | 64.70 | 7.24   | 131.68 | 5.00              |
| 2014/01/01 00:46 | 20.58 | 6.06  | 30.06 | 62.30 | 7.00   | 132.96 | 4.00              |
| 2014/01/01 00:47 | 21.95 | 3.42  | 32.41 | 58.02 | 10.01  | 132.82 | 7.30              |
| 2014/01/01 00:48 | 21.70 | 2.94  | 16.88 | 42.23 | 4.71   | 88.52  | 8.61              |
| 2014/01/01 00:49 | 20.62 | 4.89  | 16.42 | 42.87 | 4.79   | 91.54  | 7.12              |
| 2014/01/01 00:50 | 20.61 | 7.07  | 27.10 | 60.82 | 8.80   | 104.85 | 7.65              |
| 2014/01/01 00:51 | 21.41 | 7.84  | 24.42 | 65.95 | 8.40   | 127.92 | 7.40              |
| 2014/01/01 00:52 | 20.30 | 6.15  | 32.29 | 64.70 | 7.24   | 131.68 | 5.00              |
| 2014/01/01 00:53 | 20.58 | 6.06  | 30.06 | 62.30 | 7.00   | 132.96 | 4.00              |
| 2014/01/01 00:54 | 21.95 | 3.42  | 32.41 | 58.02 | 10.01  | 132.82 | 7.30              |
| 2014/01/01 00:55 | 21.70 | 2.94  | 16.88 | 42.23 | 4.71   | 88.52  | 8.61              |
| 2014/01/01 00:56 | 20.62 | 4.89  | 16.42 | 42.87 | 4.79   | 91.54  | 7.12              |
| 2014/01/01 00:57 | 20.61 | 7.07  | 27.10 | 60.82 | 8.80   | 104.85 | 7.65              |
| 2014/01/01 00:58 | 21.41 | 7.84  | 24.42 | 65.95 | 8.40   | 127.92 | 7.40              |
| 2014/01/01 00:59 | 20.30 | 6.15  | 32.29 | 64.70 | 7.24   | 131.68 | 5.00              |
| 2014/01/01 01:00 | 20.58 | 6.06  | 30.06 | 62.30 | 7.00   | 132.96 | 4.00              |

## Reporting

LWEB-900 can create reports based on trend logs. Reports can be used, for example, to document the energy consumption in a building. The generation of a report can be triggered in one of the following ways:

- Periodically: Reports can be generated daily, weekly, monthly, or yearly.
- Event: The change of a data point value can trigger a report.
- Manually: A report can be triggered manually by the user.

Reports can be generated in PDF, Excel, or Word format. They can be automatically distributed via e-mail.

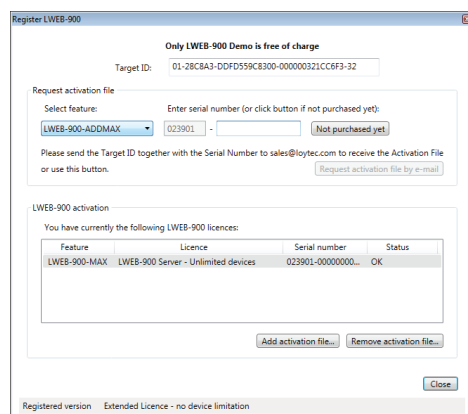

### Licensing

The licensing is based on the number of devices connected to an LWEB-900 Server. The base license includes 10 LOYTEC device licenses. To extend the number of devices, add-on licenses for 10 devices are available. An add-on license for an unlimited number of devices is available as well. For customers who know right from the beginning that they need a license for an unlimited number of devices, such license is offered as well. The maximum number of devices that can be integrated on an LWEB-900 Server depends on the PC and the database resources provided. LOYTEC L-IP Router and L-IOB Modules connected to L-INX Automation Servers, L-ROC Room Controllers or L-IOB I/O Controllers via L-IOB plug and play do not consume a device license. A fully featured LWEB-900 demo license with 30 days runtime is provided as well, including 10 device licenses.

### BACnet Operator Workstation B-OWS (LWEB-900 Version 2.0)

A BACnet Operator Workstation is designed to provide an operator with all the information and editing ability needed for managing a system on a daily basis. In addition to viewing and editing selected BACnet object, an Operator Workstation can display trends, schedules, and other specialized objects. It can also display reports and graphics. A BACnet Operator Workstation will notify the operator that an alarm has occurred, lets the operator acknowledge the alarm, provides a summary of alarms, and allows to adjust the alarm thresholds of analog objects.

### Watch View

The watch view allows observing data point values in real time. Depending on the data point types, the values can also be changed and easily edited within the watch view. You are able to see what is actually going on in the network.

### AKS – Identification Keys

Each data point is uniquely identified by its name and path. With LWEB-900, you can define your own identification key schema and assign identification keys (IK) to each data point. The IK schema can be exported and imported into other LWEB-900 projects.

### Conclusion

Together with LOYTEC devices, LWEB-900 is a seamless and comprehensive solution for building automation. Instead of separate tools and project files for different devices, LWEB-900 provides a common user interface for configuring and operating the complete system. The consistent use of web services for data communication allows controlling LWEB-900 from remote, no matter whether there are firewalls and NAT routers or not. In this way, end users and service technicians can monitor, operate, and configure the buildings' technical equipment from remote using standard IP technology.

## Features

- Displays customized graphical pages with dynamic content
- Multi-browser support (web access)
- Alarming from different sources, and time- and event-based forwarding via e-mail to several recipients
- Hierarchical organization of calendar and scheduler parameters across multiple devices and within the LWEB-900 Server
- Presentation of trend data in the form of charts or tables
- Structured representation and efficient adaptation of system and operating parameters (Parameter View)
- Fast and system-wide access to real time data
- Supports Global Connections
- SQL data base server
- Manages multiple users and access rights via ACL
- Reporting module to generate reports from trend logs using templates
- Configuration software for LOYTEC hardware can be directly started within the LWEB-900 user interface
- Automatic, periodic device backup and easy recovery of the device configuration for a device replacement
- Checks if firmware updates are available (Internet connection required) and displays devices with outdated firmware
- Download of the latest firmware for a defined group of devices
- Uses web services for communication (OPC XML-DA, SOAP/XML)
- Easy communication across firewalls and NAT routers on the Intranet and Internet
- Import/Export of trend logs and identification keys schema
- BACnet Operator Workstation (B-OWS)
- Watch View allows observing data points in real time

## Specifications

| Compatible with       | L-INX Automation Server, L-ROC Room Controller, L-GATE Gateway, L-DALI Controller, L-VIS Touch Panel, L-IOB I/O Controller, L-IP Router                                                                                                                                                        |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating system      | Windows 7, Windows 8, Windows 10, Windows Server 2008, Windows Server 2012                                                                                                                                                                                                                     |
| Hardware requirements | LWEB-900 server: PC with at least 2 GHz, 32- or 64-bit processor, 4 GB RAM, 50 GB free hard disk space, Ethernet connection<br>LWEB-900 client: PC with at least 2 GHz, 32- or 64-bit processor, 2 GB RAM, 1 GB free hard disk space, Ethernet connection, screen resolution 1280x720          |
| Order number          | Product description                                                                                                                                                                                                                                                                            |
| LWEB-900              | Building Management Software for 10 devices (L-IP Router and L-IOB I/O Modules connected as extension to the L-INX Automation Servers, L-ROC Room Controllers and L-IOB I/O Controllers do not consume a device license), licenses for 5 LWEB-900 Clients and 20 LWEB-80x Clients are included |
| LWEB-900-ADD-10       | Add-on license for 10 additional devices                                                                                                                                                                                                                                                       |
| LWEB-900-ADD-MAX      | Add-on license for an unlimited number of devices                                                                                                                                                                                                                                              |
| LWEB-900-MAX          | Building Management Software for an unlimited number of devices, licenses for 5 LWEB-900 Clients and 20 LWEB-80x Clients are included                                                                                                                                                          |
| LWEB-900-CL-5         | Add-on license for additional 5 LWEB-900 Clients                                                                                                                                                                                                                                               |
| LWEB-900-80x-50       | Add-on license for additional 50 LWEB-80x Clients                                                                                                                                                                                                                                              |
| LWEB-900-80x-100      | Add-on license for additional 100 LWEB-80x Clients                                                                                                                                                                                                                                             |
| LWEB-900-80x-MAX      | Add-on license for an unlimited number of LWEB-80x Clients                                                                                                                                                                                                                                     |

## Graphical User Interface

### LWEB-803

Datasheet #89025519





LWEB-803 is a graphical user interface to visualize dynamic pages showing plant details or a virtual room operator panel on a Microsoft Windows PC.

#### Dynamic Graphical Pages

The graphical pages consist of multiple dynamic graphical controls that show the current plant status in real time. It is also possible to access decentralized schedules, alarm servers, and trends. The graphical projects are designed with the L-VIS/L-WEB configuration tool free of charge. Without any know-how in HTML or Java, user specific graphical pages can be created. Dynamic information is shown through value or text controls, changing symbols, bar charts, trend views, alarm and event lists, and schedule controls. The L-VIS/L-WEB configuration tool allows for using most of the pixel graphic formats (GIF, JPG, BMP, TIF, PNG) or vector graphics (SVG). The graphical projects may be stored on a LOYTEC device connected to the building network, on a file server, or on a 3rd party web server.


#### Data Point Communication through Web Services

LWEB-803 talks to LOYTEC devices using web services. Utilizing web services allows for smooth communication across firewalls and NAT routers. This way, the Intranet or Internet can be used to build up a distributed building automation system.

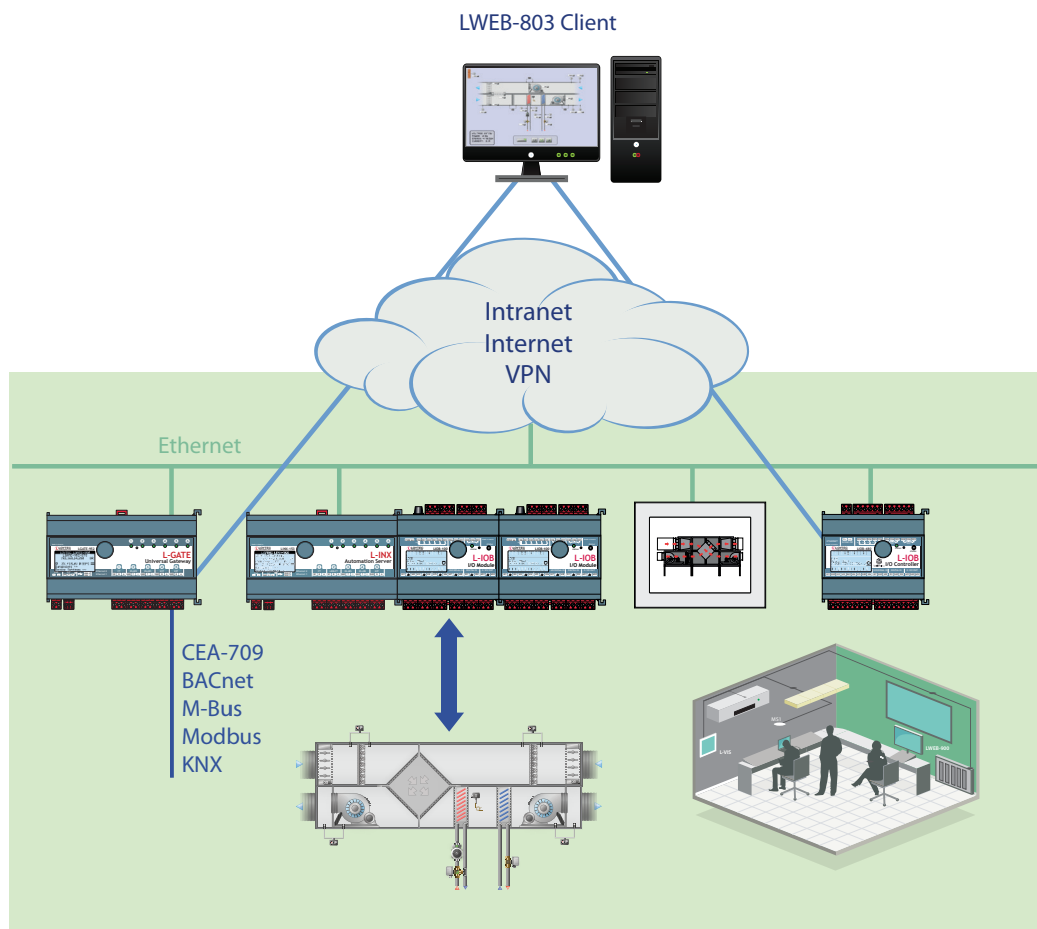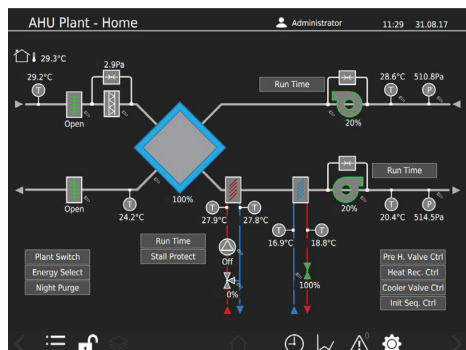

### Fast Navigation

When executing the graphical project, LWEB-803 loads the complete content and stores it on a PC. When changes in the graphical project are made, reloading the project simply updates the version on the PC. During normal operation, the data communication between LWEB-803 and the LOYTEC devices is limited to data point updates. The result is a fast navigation between the pages even when the connection is slow.



### Virtual Room Operator Panel on PC

LWEB-803 can be used as a state of the art alternative to physically mounted room operator panels. LWEB-803 pages can be viewed in “Design Mode” which allows showing the graphical pages without frames and with a transparent background. LWEB-803 virtual room operator panels can be stored on the LOYTEC devices and operated within the MS Windows PC environment. There is practically no limit for the designer regarding the size, colors, and utilization of graphical elements. Even high availability of the system can be achieved by storing the virtual operator panels distributed on devices in the network.

### Protected Kiosk Mode

In “Kiosk Mode”, users can exclusively operate the LWEB-803 application on the PC. When in Kiosk Mode, the user has no access to the PC’s desktop or any other software running on the PC.

### Show Data Points from Multiple Devices in One Page

LWEB-803 can show data points located on multiple distributed devices in one page. This functionality is particularly important when utilized in energy monitoring applications where meter values are provided by distributed LOYTEC devices. When projects are distributed across multiple devices, LWEB-803 allows to create links between the projects for a continuous operation.

### Display Diversity

LOYTEC devices can host multiple LWEB-803 projects. Each of these projects can have any resolution to display them perfectly on a PC monitor. Multiple Windows PCs can access LOYTEC devices at the same time. Widgets or dashboards can be created and placed on the PC desktop. Virtual room units can be designed appealingly in terms of style and usability to give access to room functions.

## Features

- Displays customized graphic pages with dynamic content
- User-specific page layout, optionally frameless with transparent background
- Support of vector fonts
- Allows access to automation functions such as Alarming, Scheduling, and Trending (AST™)
- Presentation of trend data in the form of charts or tables
- Display of alarms in alarm lists
- Allows links between distributed LWEB-803 projects for a continuous operation
- Design of graphical projects with the L-VIS Configuration software
- Automatic updates (Internet connection required)
- Uses web services (OPC XML-DA, SOAP/XML) for communication
- Easy communication across firewalls and NAT routers



## Graphical User Interface

### LWEB-803


#### Specifications

|                     |                                                                                                                                      |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Compatible with     | L-INX Automation Server, L-ROC Room Controller, L-GATE Universal Gateway, L-VIS Touch Panel, L-IOB I/O Controller, L-DALI Controller |
| Operating system    | Windows 7, Windows 8, Windows 10, Windows Server 2003 (32-bit), Windows Server 2008, Windows Server 2012                             |
| Configuration tools | L-INX Configurator and L-VIS/L-WEB Configurator                                                                                      |

#### Order number    Product description

|          |                                                                      |
|----------|----------------------------------------------------------------------|
| LWEB-803 | Graphical user interface, visualization on Windows PC, free download |
|----------|----------------------------------------------------------------------|

Datasheet #89025719

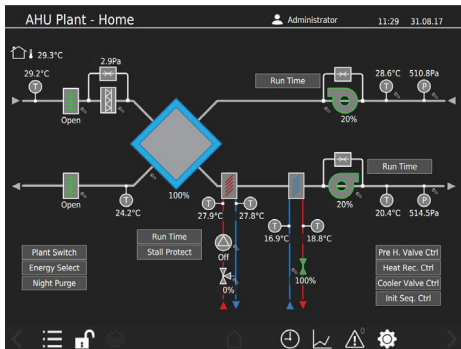

LWEB-802 is a platform independent graphical user interface to visualize dynamic pages showing plant details or a virtual room operator panel in a standard web browser. By utilizing HTML5 and Java Script, the pages can be shown in a standard web browser without the need to install any additional software or browser plug-ins. LWEB-802 is tested to work with PCs (MS and MAC), smart phones, and tablets running Android OS or iOS. No apps are required or need to be maintained. The page creation process and also the feature set is the same as for LWEB-803.

### Dynamic Graphical Pages

The graphical pages consist of multiple dynamic graphical controls that show the current plant status in real time. It is also possible to access decentral schedules, alarm servers, and trends. The graphical projects are designed with the L-VIS/L-WEB configuration tool free of charge. Without any know-how in HTML or Java, user specific graphical pages can be created. Dynamic information is shown through value or text controls, changing symbols, bar charts, trend views, alarm and event lists, and schedule controls. The L-VIS/L-WEB configuration tool allows for using most of the pixel graphic formats (GIF, JPG, BMP, TIF, PNG) or vector graphics (SVG). The graphical projects may be stored on a LOYTEC device connected to the building network, on a file server, or on a 3rd party web server.

### Data Point Communication through Web Services

LWEB-802 talks to LOYTEC devices using web services. Utilizing web services allows for smooth communication across firewalls and NAT routers. This way, the Intranet or Internet can be used to build up a distributed building automation system.

### Fast Navigation


When opening the project, the complete content is loaded into the web browser. Navigating through the pages is done without loading any more content. The communication between LWEB-802 and LOYTEC devices is reduced to just data point updates. The result is extremely fast navigation between graphical pages even when the connection is slow.

### Room Operation through Web Browser

Specifically for room automation applications, LWEB-802 can be used as a state of the art alternative to room operator panels. Virtual room operator panels can be stored on the LOYTEC devices and operated within a standard web browser. There is practically no limit for the designer regarding the size, colors, and utilization of graphical elements. A high availability of the system can be achieved by storing the virtual operator panels distributed on devices in the network.

### Show Data Points from Multiple Devices in One Page

LWEB-802 can show data points located on multiple distributed devices in one page. This functionality is particularly important when utilized in energy monitoring applications, where meter values are provided by distributed LOYTEC devices.

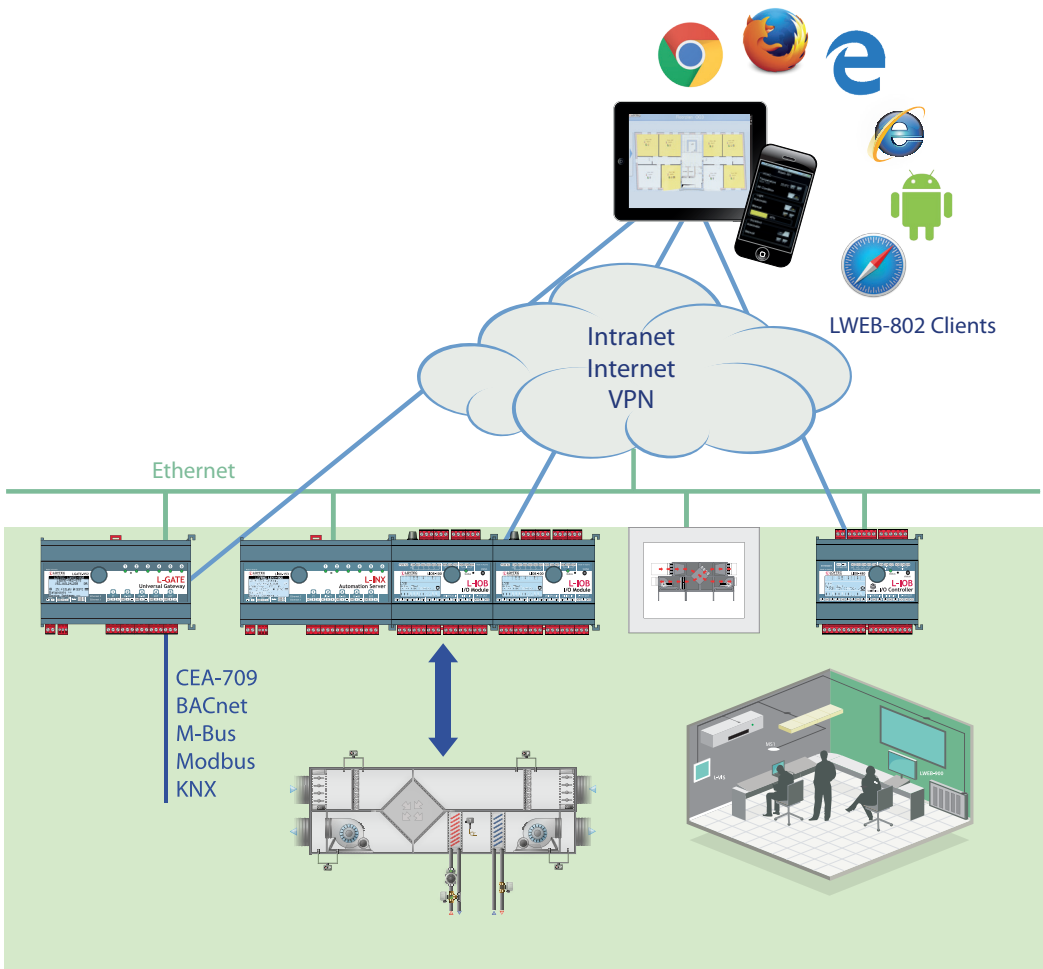




## Features

- Displays customized graphic pages in the web browser
- Multi-browser support
- Allows access to automation functions such as Alarming, Scheduling, and Trending (AST™)
- Presentation of trend data in the form of charts or tables
- Support of vector fonts
- Display of alarms in alarm lists
- Allows links between distributed LWEB-802 projects for a continuous operation
- Design of graphical projects with the L-VIS Configuration software
- Automatic updates (Internet connection required)
- Uses web services (OPC XML-DA, SOAP/XML) for communication
- Easy communication across firewalls and NAT routers

## Specifications

| Compatible with     | L-INX Automation Server, L-ROC Room Controller, L-GATE Universal Gateway, L-VIS Touch Panel, L-IOB I/O Controller, L-DALI Controller |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Web browser         | Google Chrome, Firefox, Android browser, iOS browser, Internet Explorer 10/11/Edge                                                   |
| Configuration tools | L-INX Configurator and L-VIS/L-WEB Configurator                                                                                      |
| Order number        | Product description                                                                                                                  |
| LWEB-802            | Graphical user interface via web browser, compatible to Android and iOS, free download                                               |

## L-STUDIO

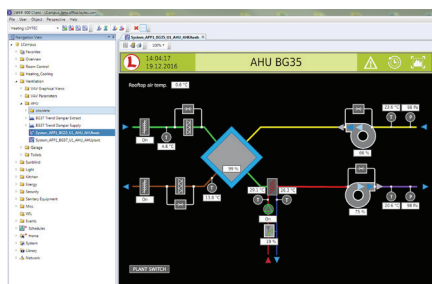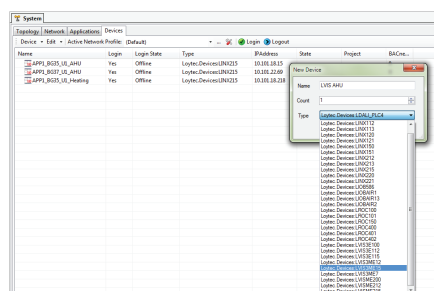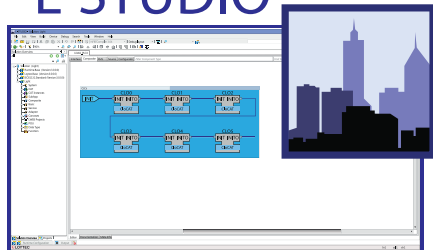

L-STUDIO has established itself as an integration platform for the L-ROC system for individual room control installations. With the new version L-STUDIO 3.0, LOYTEC is now taking the next step and extending the programming function by a development environment in accordance with the industry standard IEC 61131.

### L-STUDIO 3.0

Special challenges have arisen for the building automation market over the last few years. The search for energy-efficient operation requires complex control algorithms. At the same time, the comfort for the building's tenants needs to be increased. For regulating primary plants, e.g. ventilation systems, heating control systems or VAV systems, room automation is a relatively young discipline with a regulation of local functions such as lighting, shading and indoor climate. The highest degree of energy efficiency can only be achieved by a functional link-up of primary plants and room automation. Executing companies struggle with considerable cost pressure to offer these systems competitively. At the same time, the largest share of the total costs is attributable to the factor working hours. An essential part of a modern building automation solution is therefore a system that provides tools for the rapid and efficient planning of individual solutions.

There are several devices for the automated control of buildings available. Why do you need another system and what is special about L-STUDIO? The special feature is the comprehensive integration at all levels of the building control system, which enables extremely efficient and cost-effective workflows.

### Integration of logic and data points

In L-STUDIO, data points for communication can be stored directly in logic blocks. Functions can be created either using one of the supplied libraries or by the user himself. As a configuration interface, the already familiar L-INX Configurator was integrated into the L-STUDIO software. The data points are generated automatically in the controller as soon as an instance of the function block for the program is created in the controller. The complete spectrum of LOYTEC's standard protocols (BACnet, CEA-709, Modbus, M-Bus, KNX, EnOcean, SMI, ...) is supported. But not only the data points are created automatically, all automation functions such as alarms, timer programs, trend logs or historical filters, which are specifically defined for these data points, are also generated without further configuration effort.

### Integration of logic and visualization

The data points are the backbone for communication in a building automation system - the beautiful face, however, is the graphical visualization through which the end user operates the system. The visualization can be defined simultaneously with the logic functions. For each function block, one or more different "symbols" can be generated. The configuration tool "L-VIS Configurator", which is known from the LOYTEC Touch Panels and the software L-WEB, is integrated directly in L-STUDIO. All controls and functions, such as events or triggers, are available in the symbol editor.

### Building management: L-STUDIO and LWEB-900 work as a team

In the case of larger projects, a central control system (building management system) is necessary, such as LOYTEC's LWEB-900 system. L-STUDIO projects can be directly imported into the LWEB-900 database. All devices including their configuration are created and saved automatically. Likewise, the graphical projects are loaded and converted from the devices so that they can be used as graphical views in LWEB-900. When changes are made to the L-STUDIO project, the imported data in LWEB-900 can be updated in a single step. Special functions on the management level, such as customizing parameters or the management of timer programs and alarms, are adjusted with the LWEB-900 software.

### Licensing via USB dongle

The L-STUDIO 3.0 programming environment is licensed via a USB dongle. This

Engineering Tool

L-STUDIO 3.0

ensures that the license continues to function reliably even in case of computer changes or when system updates are necessary. On the controller side, a proprietary licensing algorithm was implemented to enable programming via Logicad or L-STUDIO. The new L-INX Automation Servers and L-IOB Controllers are programmable with L-STUDIO. If the device is to be programmed via L-LOGICAD instead, a runtime license has to be acquired. For this purpose, a registration code is generated for a controller which is entered via the controller’s website or the LCD display.

| Software licensing                                                        |             |             |
|---------------------------------------------------------------------------|-------------|-------------|
| Controller                                                                | License     |             |
|                                                                           | L-LOGICAD   | L-STUDIO    |
| LINX-215                                                                  | upgradeable | included    |
| LINX-153, LINX-154                                                        | upgradeable | included    |
| LIOB-18x                                                                  | included    | n/a         |
| LIOB-48x                                                                  | included    | n/a         |
| LIOB-580, LIOB-581, LIOB-582, LIOB-583, LIOB-584                          | included    | n/a         |
| <b>LIOB (V2) = with new hardware version</b>                              |             |             |
| LIOB-18X (V2)                                                             | included    | n/a         |
| LIOB-48x (V2)                                                             | included    | upgradeable |
| LIOB-580 (V2), LIOB-581 (V2), LIOB-582 (V2), LIOB-583 (V2), LIOB-584 (V2) | included    | upgradeable |
| LIOB-586                                                                  | included    | included    |
| LIOB-585, LIOB-588, LIOB-589                                              | upgradeable | included    |
| LIOB-AIRx                                                                 | n/a         | included    |
| LDALI-PLC4                                                                | n/a         | included    |



# L-ROC Room Automation








- ✓ BACnet
- ✓ CEA-709
- ✓ KNX

- ✓ Modbus
- ✓ M-Bus
- ✓ OPC

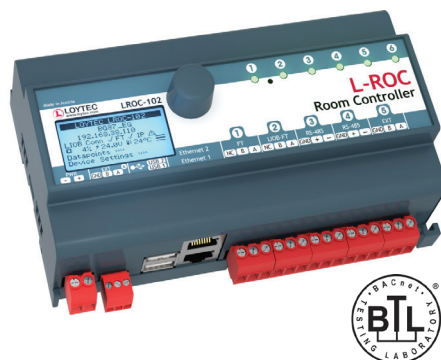

The L-ROC Room Controller LROC-102 provides the basis for a revolutionary room automation system based on IP, which seamlessly integrates with native BACnet/IP networks and LonMark Systems at the controller level. Together with the L-STUDIO software, flexible room solutions can be created with little effort and changed on demand. Integral parts of the L-ROC System are a web-based room operation via an LWEB-802/803 dashboard and the automatic generation of graphics for the L-VIS Touch Panel for local operation. For CEA-709 room control units, CEA-709 multi-sensors and other CEA-709 devices can be connected via the LonMark TP/FT-10 channel on the L-ROC Controller. Local inputs and outputs are provided via L-IOB I/O Modules. KNX S-mode devices can be connected through KNX TP1 by using the optional LKNX-300 module.

## Flexible Room Concept for Room Automation



A room segment is the base unit of configuration in the L-ROC System. The L-ROC Room Controller provides a set of functions for every window axis including:

- lighting control with constant light controller
- sun blind control with angle adjustment
- temperature control for heating, cooling, and ventilation
- occupancy detection
- window monitoring

Each L-ROC Room Controller can handle up to 16 room segments. Based on the various room segment types, larger buildings can be modeled in a hierarchical manner. Areas are built with an area manager by combining multiple room controllers. A floor manager manages multiple areas in one floor. Depending on the architecture, the building can be split up into areas and floors as needed.

Area/Floor Managers are responsible for handling functions needed for corridor, staircase, and bathroom lighting, or even ventilation. Floor managers facilitate the data communication between the floors and handle floor relevant functions.

Rooms can now be created arbitrarily in any size by moving, installing, or removing partition walls. The resulting logical connections between the L-ROC Room Controllers will be built automatically. All graphical user interfaces and network connections are automatically generated and adapted respectively.

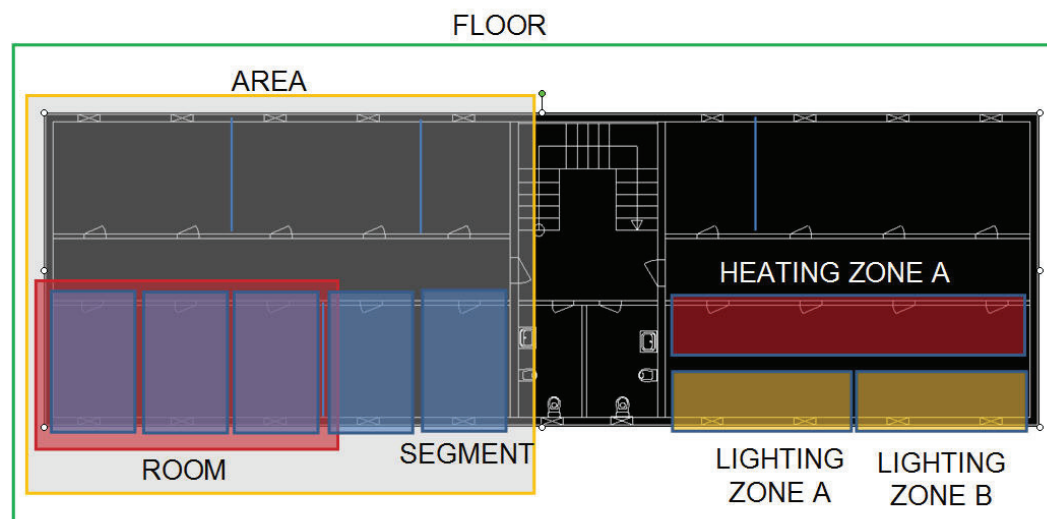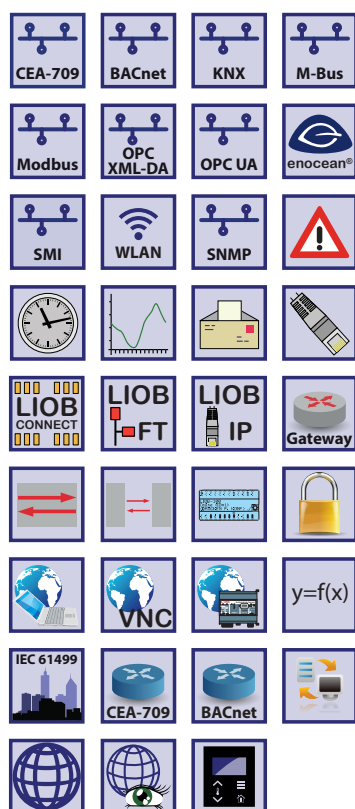

### AST™ for every Room Segment

L-ROC provides a set of functions for Alarming, Scheduling, and Trending (AST™) for every room segment. Each room segment can be operated entirely independently. The AST™ functions are fully available to higher-level systems through BACnet/IP and web services (L-WEB System). Distributed schedulers can be efficiently managed and changed with LWEB-900.

### Room Communication through redundant or separated IP Network

L-ROC Room Controllers are interconnected via a 100Base-T Ethernet network. Each L-ROC device is equipped with two Ethernet ports. It can either be configured to use the internal switch to interconnect the two ports or every port is configured to work in a separate IP network.

When the Ethernet ports are configured for two separate IP networks, one port can be connected for instance to a WAN (Wide Area Network) with enabled network security (HTTPS) while the second port can be configured to be connected to an insecure network (LAN) where the standard building automation protocols like BACnet/IP, LON/IP, or Modbus TCP are present. These devices also feature fire-wall functionality of course to isolate particular protocols or services between the ports.

Using the internal switch, a daisy chained line topology of up to 20 devices can be built, which reduces costs for network installation. The IP switch also allows the setup of a redundant Ethernet installation (ring topology), which increases reliability. The redundant Ethernet topology is enabled by the Rapid Spanning Tree Protocol (RSTP), which is supported by most managed switches.

### Integrated L-WEB Room Operation

L-ROC controllers provide graphical user interfaces for room operation directly via an IP connection to the user, without the need for an additional web server. Graphic projects are distributed among the L-ROC Room Controllers and can be accessed by LWEB-802/803 from any PC workstation, smart phone, or tablet PC running Android or iOS.

### Integration of the L-STAT Network Thermostat

Per L-ROC Room Controller up to 16 L-STAT room control devices can be integrated into building automation via Modbus RTU (RS-485) interface. In addition to the attractive, modern design and intuitive operation, L-STAT provides a range of other features to individually increase the room comfort.

Internal sensors measure temperature, humidity, condensation, occupancy, and also the CO<sub>2</sub> value of the air. There is also the possibility to control room functions from remote via an IR remote control. Standard pushbuttons and external temperature sensors can be integrated through additional inputs. A built-in NFC chip (Near Field Communication) provides the ability to direct mobile devices to the address of the respective room website.



### Connection to Higher-Level Systems

Higher-level systems can seamlessly integrate L-ROC Room Controllers via BACnet/IP, LonMark IP-852, or web services (OPC).

All these protocols are simultaneously available. It is possible to integrate the L-ROC Room Controller in a BACnet Operator Workstation and at the same time L-ROC will communicate with other CEA-709 devices on the IP-852 channel. Moreover, a higher-level SCADA or ERP System (Facility Management) gets information directly from the L-ROC Room Controller by using web services based on OPC.

### Full LWEB-900 Support

The L-WEB System uses web services to communicate with the L-ROC System. All device and operating parameters of every single L-ROC Room Controller are



automatically synchronized with the LWEB-900 SQL database by the LWEB-900 client or the LWEB-900 Master Device Manager. The parameters are available to all L-WEB client applications.

I/O Integration via Plug and Play

The L-ROC Room Controllers can automatically integrate physical I/Os by using L-IOB I/O Modules. Up to 24 L-IOB I/O Modules can be connected through LIOB-Connect, LIOB-FT, or LIOB-IP. All I/Os can be used by the L-ROC application and are also available via the web interface of L-ROC. All configurations of the L-IOB Modules are stored on the L-ROC and loaded on demand into the L-IOB I/O Modules. Exchanging I/O modules is done without any configuration effort requiring only a few quick configuration steps.



L-STUDIO

L-STUDIO is the world’s first IEC 61499 based room automation system. Any room function can be realized with L-STUDIO in a distributed system of L-ROC devices. We call this new approach in automation “Cloud Control”. In a cloud of L-ROC devices, all automation functions are mapped automatically to physical hardware. The object-oriented design method allows the efficient reuse of previously implemented functions. In the graphical development environment of L-STUDIO, areas are created from room segment with just a few mouse clicks. The areas are interconnected to floors and multiple floors form a building. The entire building application is automatically distributed to the L-ROC Controllers installed in the building.

New functions can be added to the room segment objects after initial configuration. These new functions can be applied individually or to all room segment objects very easily. Comprehensive debugging and watch functions allow for complete building troubleshooting. An extensive library of functions is provided for heating, ventilation, cooling, lighting, sun blind control, and security. With the integrated L-VIS/L-WEB Configurator, graphical pages for L-VIS Touch Panels and L-WEB applications can be customized.

## Features

- Flexible built-in management for room segments
- Room controller for up to 16 room segments
- Networking via redundant or separated IP network
- Programmable with L-STUDIO (IEC 61499)
- Extension with physical inputs and outputs using L-IOB I/O Modules (LIOB-10x, LIOB-15x, and LIOB-45x/55x)
- 128x64 graphic display with backlight
- Local display of device and data point information
- Manual operation using the jog dial or VNC Client
- Integrated AST™ functions (Alarming, Scheduling, and Trending) for each room segment
- Event-driven e-mail notification
- Math objects to execute mathematical operations on data points
- Stores customized graphical pages
- Visualization of customized graphical pages through LWEB-900 (Building Management), LWEB-803 (Monitoring and Control), or LWEB-802 (Web Browser)
- Support of the L-STAT Network Thermostat
- Built-in OPC XML-DA and OPC UA server
- Dual switched or separated Ethernet ports
- Access to network statistics
- Compliant with ANSI/ASHRAE 135-2012 and ISO 16484-5:2012 standard
- Supports BACnet MS/TP or BACnet/IP
- BACnet Client Function (Write Property, Read Property, COV Subscription)
- BACnet Client Configuration with configuration tool (scan and EDE import)
- BACnet/IP compliant with B-BC (BACnet Building Controller) functionality
- Compliant with CEA-709, CEA-852, and ISO/IEC 14908 Standard (LonMark System)
- Connection of any CEA-709 device via TP/FT-10 channel
- CEA-709 integration via LonMark IP-852 (Ethernet/IP) channel
- Support of dynamically created or static NVs
- Support of user-defined NVs (UNVTs) and Configuration Properties (SCPTs, UCPTs)
- Integrated BACnet/IP to BACnet MS/TP Router including BBMD as well as Slave-Proxy functionality
- Integrated IP-852 to TP/FT-10 Router
- Connection to KNXnet/IP directly, KNX TP1 via LKNX-300 Interface
- M-Bus Master according to EN 13757-3, connection via optional M-Bus Converter (L-MBUS20 or L-MBUS80)
- Gateway functions including Smart Auto-Connect™
- Modbus TCP and Modbus RTU (Master or Slave)
- Integrated web server for device configuration and monitoring data points
- Configurable via Ethernet/IP
- Connection to EnOcean wireless devices via LENO-80x Interface
- Supports SMI (Standard Motor Interface) through LSMI-80x
- Supports WLAN through LWLAN-800 Interface
- Stores user-defined project documentation



## LROC-102

### General Specifications

|                      |                                                                                         |
|----------------------|-----------------------------------------------------------------------------------------|
| Dimensions (mm)      | 159 x 100 x 75 (L x W x H), DIM053                                                      |
| Installation         | DIN rail mounting following DIN 43880, top hat rail EN 50022                            |
| Power supply         | 24 VDC / 24 VAC $\pm 10\%$ , typ. 2.5 W                                                 |
| Operating conditions | 0 °C to 50 °C, 10–90 % RH, non condensing, degree of protection: IP40, IP20 (terminals) |

### Specifications

|            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type       | <b>LROC-102</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Interfaces | <p>2 x Ethernet (100Base-T):<br/> Web services (OPC XML-DA, OPC UA), LonMark IP-852*, BACnet/IP**, LIOB-IP, KNXnet/IP, Modbus TCP (Master or Slave), HTTP, FTP, SSH, HTTPS, Firewall, SNMP</p> <p>1 x LIOB-Connect</p> <p>2 x USB-A: WLAN (needs LWLAN-800), EnOcean (needs LENO-80x), SMI (needs LSMI-804)</p> <p>1 x TP/FT-10* (LonMark System)</p> <p>1 x LIOB-FT</p> <p>2 x RS-485 (ANSI TIA/EIA-485):<br/> BACnet MS/TP** or<br/> Modbus RTU (Master or Slave)</p> <p>2 x EXT:<br/> M-Bus, Master EN 13757-3<br/> (needs L-MBUS20 or L-MBUS80)<br/> or KNX TP1 (needs LKNX-300)<br/> or SMI (needs LSMI-800)</p> |

\* Router between LonMark IP-852 and TP/FT-10

\*\* Router between BACnet/IP and BACnet MS/TP

|                        |                                                                                            |
|------------------------|--------------------------------------------------------------------------------------------|
| L-IOB I/O Modules      | Up to 24 L-IOB I/O Modules in any combination of type LIOB-10x, LIOB-15x, and LIOB-45x/55x |
| BACnet/IP Router       | 1                                                                                          |
| LonMark CEA-709 Router | 1                                                                                          |
| Program cycle time     | Event-triggered                                                                            |
| Programming, tools     | L-STUDIO (IEC 61499 based)                                                                 |

### Resource limits

|                                 |                                          |                              |                     |
|---------------------------------|------------------------------------------|------------------------------|---------------------|
| Total number of data points     | 30 000                                   | LonMark Schedulers           | 100                 |
| OPC data points                 | 10 000                                   | LonMark Alarm Servers        | 1                   |
| BACnet objects                  | 2 000 (analog, binary, multi-state)      | E-mail templates             | 100                 |
| BACnet client mappings          | 5 000                                    | Math objects                 | 100                 |
| BACnet calendar objects         | 25                                       | Alarm logs                   | 10                  |
| BACnet scheduler objects        | 100 (64 data points per object)          | M-Bus data points            | 1 000               |
| BACnet notification classes     | 32                                       | Modbus data points           | 2 000               |
| Trend logs (BACnet or generic)  | 512 (4 000 000 entries, $\approx 60$ MB) | KNX TP1 data points          | 1 000               |
| Total trended data points       | 1 000                                    | KNXnet/IP data points        | 1 000               |
| CEA-709 network variables (NVs) | 2 000                                    | Connections (Local / Global) | 2 000 / 250         |
| CEA-709 Alias NVs               | 2 000                                    | Number of L-WEB clients      | 32 (simultaneously) |
| CEA-709 External NVs (polling)  | 1 000                                    | L-IOB I/O Modules            | 24                  |
| CEA-709 address table entries   | 1 000 (non-ECS mode: 15)                 | Number of EnOcean devices    | 100                 |
| LonMark Calendars               | 1 (25 calendar patterns)                 | EnOcean data points          | 1 000               |
| SMI devices (per channel)       | 16                                       |                              |                     |

| Order number      | Product description                                                                                                                                                    |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LROC-102          | Room Controller for room segment, aisle, floor, building, or campus management                                                                                         |
| LROC-START-M      | Starter kit: 1 x LROC-102, 1 x L-IOB I/O Module, 1 x LPOW-2415A, and L-STUDIO software license                                                                         |
| L-STUDIO          | L-ROC programming and configuration software                                                                                                                           |
| LIOB-A2           | L-IOB Adapter 2 to split the LIOB-Connect bus using 4-wire cables                                                                                                      |
| LIOB-A4           | L-IOB Adapter 4 to split the LIOB-Connect bus using RJ45 network cables                                                                                                |
| LIOB-A5           | L-IOB Adapter 5 to terminate the LIOB-Connect bus                                                                                                                      |
| LIOB-100          | LIOB-Connect I/O Module: 8 UI, 2 DI, 2 AO, 9 DO (5 x Relay 6 A, 4 x Triac 0.5 A)                                                                                       |
| LIOB-101          | LIOB-Connect I/O Module: 8 UI, 16 DI                                                                                                                                   |
| LIOB-102          | LIOB-Connect I/O Module: 6 UI, 6 AO, 8 DO (8 x Relay 6 A)                                                                                                              |
| LIOB-103          | LIOB-Connect I/O Module: 6 UI, 6 AO, 5 DO (5 x Relay 16 A)                                                                                                             |
| LIOB-150          | LIOB-FT I/O Module: 8 UI, 2 DI, 2 AO, 8 DO (4 x Relay 6 A, 4 x Triac 0.5 A)                                                                                            |
| LIOB-151          | LIOB-FT I/O Module: 8 UI, 12 DI                                                                                                                                        |
| LIOB-152          | LIOB-FT I/O Module: 6 UI, 6 AO, 8 DO (8 x Relay 6 A)                                                                                                                   |
| LIOB-153          | LIOB-FT I/O Module: 6 UI, 6 AO, 5 DO (4 x Relay 16 A, 1 x Relay 6 A)                                                                                                   |
| LIOB-154          | LIOB-FT I/O Module: 7 UI, 4 AO, 7 DO (5 x Relay 6 A, 2 x Triac 0.5 A), 1 Pressure Sensor                                                                               |
| LIOB-450          | LIOB-IP852 I/O Module: 8 UI, 2 DI, 2 AO, 8 DO (4 x Relay 6 A, 4 x Triac 0.5 A)                                                                                         |
| LIOB-451          | LIOB-IP852 I/O Module: 8 UI, 12 DI                                                                                                                                     |
| LIOB-452          | LIOB-IP852 I/O Module: 6 UI, 6 AO, 8 DO (8 x Relay 6 A)                                                                                                                |
| LIOB-453          | LIOB-IP852 I/O Module: 6 UI, 6 AO, 5 DO (4 x Relay 16 A, 1 x Relay 6 A)                                                                                                |
| LIOB-454          | LIOB-IP852 I/O Module: 7 UI, 4 AO, 7 DO (5 x Relay 6 A, 2 x Triac 0.5 A), 1 Pressure Sensor                                                                            |
| LIOB-550          | LIOB-BIP I/O Module: 8 UI, 2 DI, 2 AO, 8 DO (4 x Relay 6 A, 4 x Triac 0.5 A)                                                                                           |
| LIOB-551          | LIOB-BIP I/O Module: 8 UI, 12 DI                                                                                                                                       |
| LIOB-552          | LIOB-BIP I/O Module: 6 UI, 6 AO, 8 DO (8 x Relay 6 A)                                                                                                                  |
| LIOB-553          | LIOB-BIP I/O Module: 6 UI, 6 AO, 5 DO (4 x Relay 16 A, 1 x Relay 6 A)                                                                                                  |
| LIOB-554          | LIOB-BIP I/O Module: 7 UI, 4 AO, 7 DO (5 x Relay 6 A, 2 x Triac 0.5 A), 1 Pressure Sensor                                                                              |
| LPOW-2415A        | LIOB-Connect power supply unit, 24 VDC, 15 W                                                                                                                           |
| LPOW-2415B        | Power supply unit with power connector 24 VDC, 15 W                                                                                                                    |
| L-MBUS20          | M-Bus level converter for 20 M-Bus devices                                                                                                                             |
| L-MBUS80          | M-Bus level converter for 80 M-Bus devices                                                                                                                             |
| LKNX-300          | KNX interface to connect KNX TP1 devices                                                                                                                               |
| LENO-800          | EnOcean Interface 868 MHz Europe                                                                                                                                       |
| LENO-801          | EnOcean Interface 902 MHz USA/Canada                                                                                                                                   |
| LENO-802          | EnOcean Interface 928 MHz Japan                                                                                                                                        |
| LWLAN-800         | Wireless LAN Interface IEEE 802.11bgn                                                                                                                                  |
| LSTAT-800-G3-Lx   | Network Thermostat, black front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, IR receiver, Buttons (Lx)                                  |
| LSTAT-801-G3-Lx   | Network Thermostat, front black, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, Buttons (Lx)                       |
| LSTAT-802-G3-Lx   | Network Thermostat, front black, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, CO2, Buttons (Lx)                  |
| LSTAT-800-G3-L20x | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, IR receiver, Buttons (Lx)                                  |
| LSTAT-801-G3-L20x | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, Buttons (Lx)                       |
| LSTAT-802-G3-L20x | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, CO2, Buttons (Lx)                  |
| LSTAT-80x-CUSTOM  | Customized Network Thermostat, minimum quantity 100 pieces, enclosure G1: grey, G2: black, G3: white; custom print Lx, including 2 working samples, lead time 10 weeks |
| LSMI-800          | Standard Motor Interface for 16 motors via EXT port                                                                                                                    |
| LSMI-804          | Standard Motor Interface for 64 motors, 4 SMI channels via USB                                                                                                         |



|             |            |              |        |               |          |        |       |       |                 |           |
|-------------|------------|--------------|--------|---------------|----------|--------|-------|-------|-----------------|-----------|
| Accessories | Interfaces | Routers, NIC | L-DALI | L-VIS, L-STAT | Gateways | L-IJOB | L-INX | L-ROC | L-WEB, L-STUDIO | Functions |
|-------------|------------|--------------|--------|---------------|----------|--------|-------|-------|-----------------|-----------|

|             |            |              |        |               |          |        |       |       |                 |           |
|-------------|------------|--------------|--------|---------------|----------|--------|-------|-------|-----------------|-----------|
| Accessories | Interfaces | Routers, NIC | L-DALI | L-VIS, L-STAT | Gateways | L-IJOB | L-INX | L-ROC | L-WEB, L-STUDIO | Functions |
|-------------|------------|--------------|--------|---------------|----------|--------|-------|-------|-----------------|-----------|

|             |            |              |        |               |          |        |       |       |                 |           |
|-------------|------------|--------------|--------|---------------|----------|--------|-------|-------|-----------------|-----------|
| Accessories | Interfaces | Routers, NIC | L-DALI | L-VIS, L-STAT | Gateways | L-IJOB | L-INX | L-ROC | L-WEB, L-STUDIO | Functions |
|-------------|------------|--------------|--------|---------------|----------|--------|-------|-------|-----------------|-----------|

|             |            |              |        |               |          |        |       |       |                 |           |
|-------------|------------|--------------|--------|---------------|----------|--------|-------|-------|-----------------|-----------|
| Accessories | Interfaces | Routers, NIC | L-DALI | L-VIS, L-STAT | Gateways | L-IJOB | L-INX | L-ROC | L-WEB, L-STUDIO | Functions |
|-------------|------------|--------------|--------|---------------|----------|--------|-------|-------|-----------------|-----------|

- |             |            |              |        |               |          |        |       |       |                 |           |
|-------------|------------|--------------|--------|---------------|----------|--------|-------|-------|-----------------|-----------|
| Accessories | Interfaces | Routers, NIC | L-DALI | L-VIS, L-STAT | Gateways | L-IJOB | L-INX | L-ROC | L-WEB, L-STUDIO | Functions |
|-------------|------------|--------------|--------|---------------|----------|--------|-------|-------|-----------------|-----------|




# LROC-400, LROC-401, LROC-402

- occupancy detection
- window monitoring and window contact

Depending on the model an L-ROC Room Controller can control between 8 and 16 room segments. Based on the various room segment types, larger buildings can be modeled in a hierarchical manner. Areas are built with an area manager by combining multiple room controllers. A floor manager manages multiple areas in one floor. Depending on the architecture, the building can be split up into areas and floors as needed.

Area/Floor Managers are responsible for handling functions needed for corridor, staircase, and bathroom lighting, or even ventilation. Floor managers facilitate the data communication between the floors and handle floor relevant functions e.g. processing meter data.

Rooms can be created in any size by moving, installing, or removing partition walls. The resulting logical connections between the L-ROC Room Controllers will be built automatically. All graphical user interfaces and network connections are automatically generated and adapted respectively.

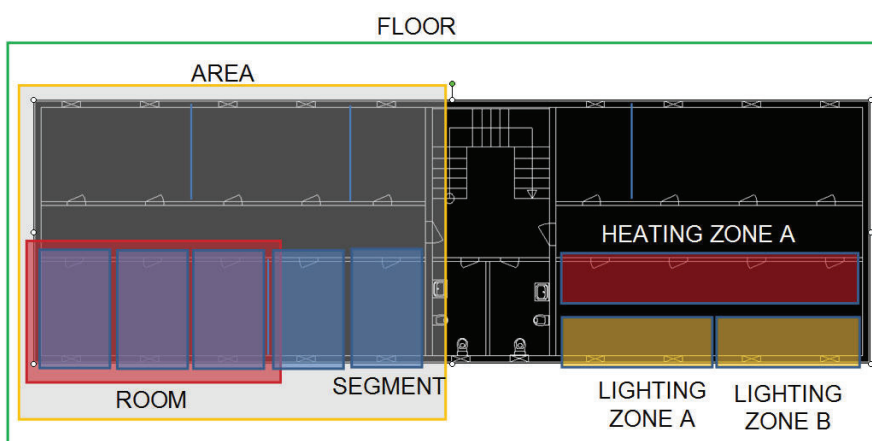

## AST™ for every Room Segment

L-ROC provides a set of functions for Alarming, Scheduling, and Trending (AST™) for every room segment. Each room segment can be operated entirely independently. The AST™ functions are fully available to higher-level systems through BACnet/IP and web services (L-WEB System). Distributed schedulers can be efficiently managed and changed with LWEB-900.



## Inter Room Communication through redundant IP Network

The L-ROC Room Controllers are equipped with two Ethernet ports. It can be configured to use the internal switch to interconnect the two ports in a bus or ring topology.

Using the internal switch, a daisy chained line topology of up to 20 devices can be built, which reduces costs for network installation. The IP switch also allows the setup of a redundant Ethernet installation (ring topology), which increases reliability. The redundant Ethernet topology is enabled by the Rapid Spanning Tree Protocol (RSTP), which is supported by most managed switches.

## Integrated L-WEB Room Operation

L-ROC controllers provide graphical user interfaces for room operation directly via an IP connection to the user, without the need for an additional web server. Graphic projects are distributed among the L-ROC Room Controllers and can be accessed by LWEB-802/803 from any PC workstation, smart phone, or tablet PC running Android or iOS.





## Integration of the L-STAT Network Thermostat

Depending on the model, 8 to 16 L-STAT thermostats can be integrated via the L-STAT interface per L-ROC Room Controller. In addition to the attractive, modern design and intuitive operation, L-STAT provides a range of features to individually increase the room comfort.

Internal sensors measure temperature, humidity, dew point, occupancy, and the CO<sub>2</sub> content of the air. There is also the possibility to control room functions via an IR remote control. Standard pushbuttons and external temperature sensors can be integrated through additional inputs. A built-in NFC chip (Near Field Communication) provides the ability to direct mobile devices to the URL of the respective room website.

## Connection to Higher-Level Systems

Higher-level systems can seamlessly integrate L-ROC Room Controllers via BACnet/IP, LonMark IP-852, or web services (OPC).

All these protocols are simultaneously available. It is possible to integrate the L-ROC Room Controller in a BACnet Operator Workstation and at the same time L-ROC will communicate with other CEA-709 devices on the IP-852 channel. Moreover, a higher-level SCADA or ERP System (Facility Management) gets information directly from the L-ROC Room Controller by using web services based on OPC XML-DA or OPC UA.

## Full LWEB-900 Support

The L-WEB System uses web services to communicate with the L-ROC System. All device and operating parameters of every single L-ROC Room Controller are automatically synchronized with the LWEB-900 SQL database. Controllers can be replaced from the database with a backup without user interaction.

## I/O Integration via Plug and Play

The L-ROC Room Controllers can automatically integrate additional physical I/Os by using L-IOB I/O Modules. Up to 2 L-IOB I/O Modules can be connected through LIOB-IP. All I/Os can be used by the L-ROC application and are also available via the web interface of L-ROC. All configurations of the L-IOB Modules are stored on the L-ROC and loaded on demand into the L-IOB I/O Modules. Exchanging I/O modules is done without any configuration effort requiring only a few quick configuration steps

## L-STUDIO




L-STUDIO is the world's first IEC 61499 based room automation system. Any room function can be realized with L-STUDIO in a distributed system of L-ROC devices. We call this new approach in automation "Cloud Control". In a cloud of L-ROC devices, all automation functions are mapped automatically to physical hardware. The object-oriented design method allows the efficient reuse of previously implemented functions. In the graphical development environment of L-STUDIO, areas are created from room segment with just a few mouse clicks. The areas are interconnected to floors and multiple floors form a building. The entire building application is automatically distributed to the L-ROC Controllers installed in the building.

New functions can be added to the room segment objects after initial configuration. These new functions can be applied individually or to all room segment objects very easily. Comprehensive debugging and watch functions allow for complete building troubleshooting. An extensive library of functions is provided for heating, ventilation, cooling, lighting, sun blind control, and security. With the integrated L-VIS/L-WEB Configurator, graphical pages for L-VIS Touch Panels and L-WEB applications can be customized..



# LROC-400, LROC-401, LROC-402

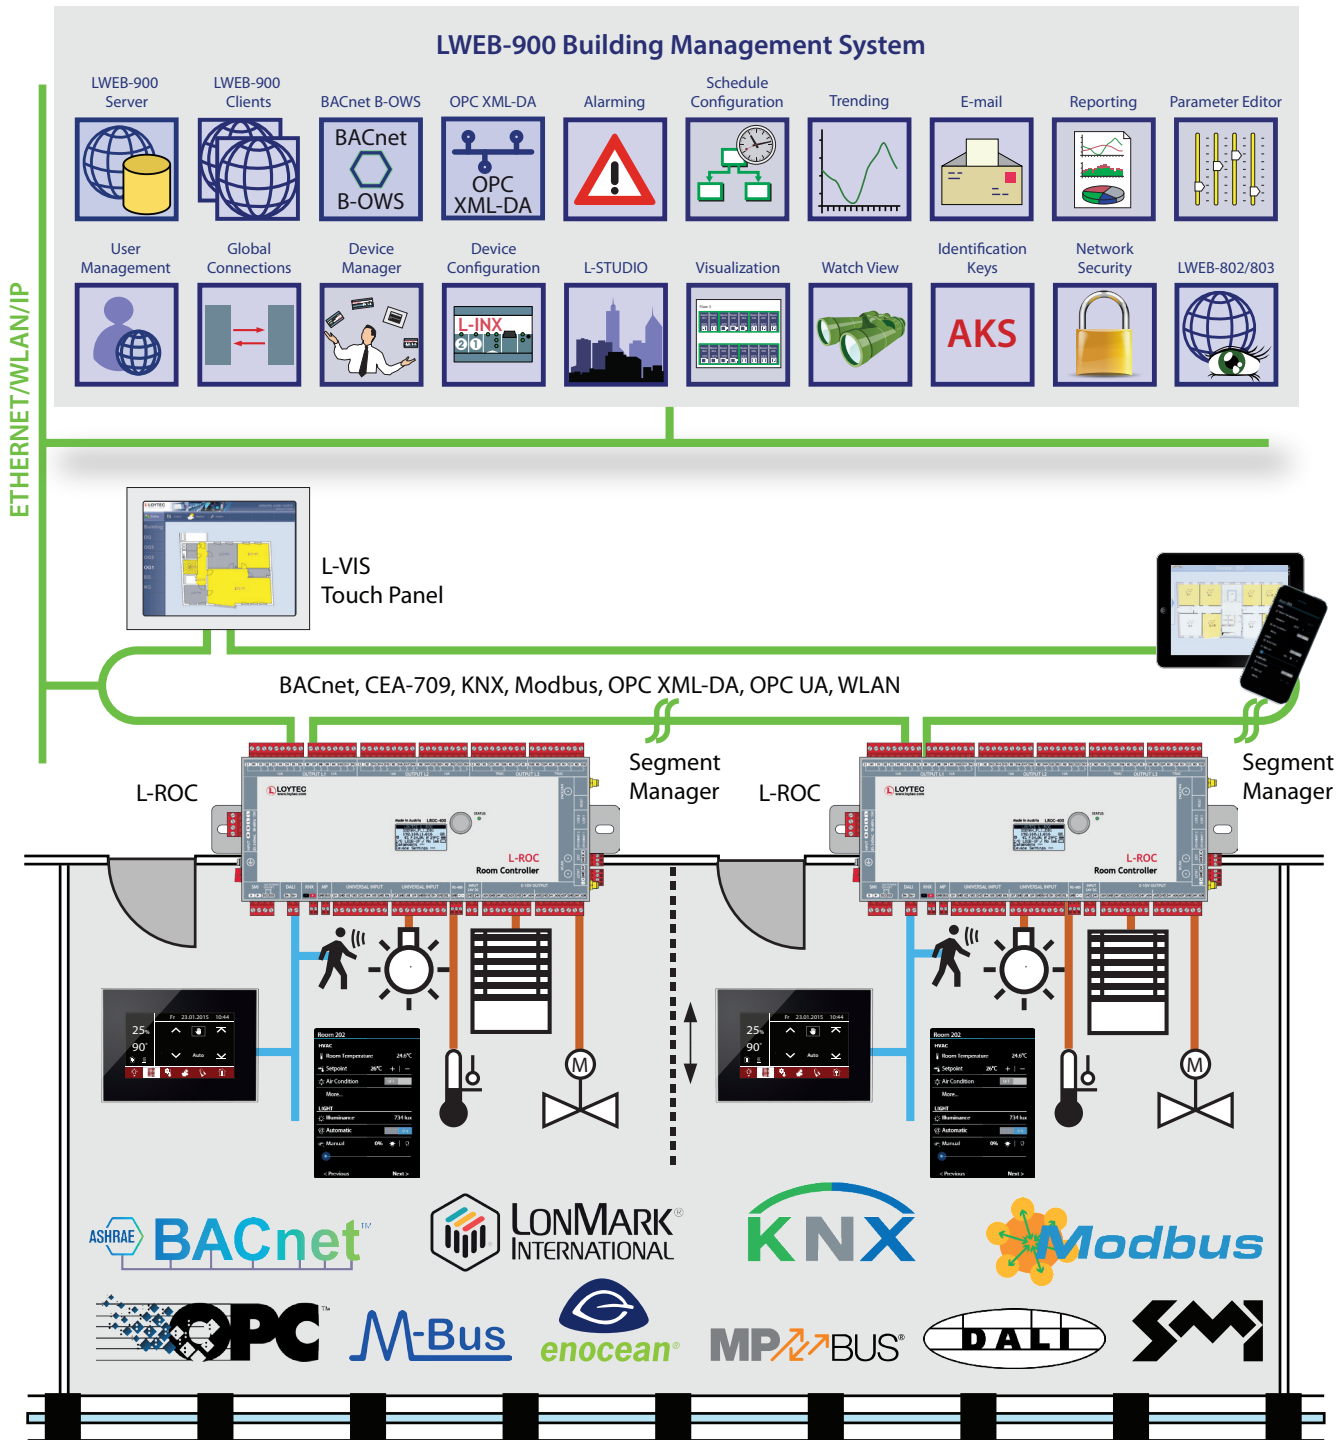

Functions

L-WEB, L-STUDIO

L-ROC

L-INX

L-IOB

Gateways

L-VIS, L-STAT

L-DALI

Routers, NIC

Interfaces


Accessories

## L-ROC Room Controller

# LROC-400, LROC-401, LROC-402

### Features

- Flexible built-in management for room segments
- Room controller for up to 8 or 16 room segments
- Networking via redundant IP network
- Programmable with L-STUDIO
- Extension with physical inputs and outputs using L-IOB I/O Modules (LIOB-45x or LIOB-55x)
- 128x64 graphic display with backlight for device configuration and maintenance
- Local display of device and data point information
- Manual operation using the jog dial or VNC Client
- Integrated AST™ functions (Alarming, Scheduling, and Trending) for each room segment
- Event-driven e-mail notification
- Math objects to execute mathematical operations on data points
- Stores customized graphical pages
- Visualization of customized graphical pages through LWEB-900 (Building Management), LWEB-803 (Monitoring and Control), or LWEB-802 (Web Browser)
- Support of the L-STAT Network Thermostat
- Built-in OPC XML-DA and OPC UA server
- Access to network statistics via SNMP
- Compliant with ANSI/ASHRAE 135-2012 and ISO 16484-5:2012 standard
- Supports BACnet MS/TP and BACnet/IP
- BACnet Client Function (Write Property, Read Property, COV Subscription)
- BACnet Client Configuration with configuration tool (scan and EDE import)
- BACnet/IP compliant with B-BC (BACnet Building Controller) functionality
- Integrated BACnet/IP to BACnet MS/TP Router including BBMD as well as Slave-Proxy functionality
- Compliant with CEA-709, CEA-852, and ISO/IEC 14908 Standard (LonMark System)
- CEA-709 integration via LonMark IP-852 (Ethernet/IP) channel
- Support of dynamically created or static NVs
- Support of user-defined NVs (UNVTs) and Configuration Properties (SCPTs, UCPTs)
- Connection to KNXnet/IP and KNX TP1
- M-Bus Master according to EN 13757-3, connection via optional M-Bus Converter (L-MBUS20 or L-MBUS80)
- Gateway functions including Smart Auto-Connect™
- Modbus TCP and Modbus RTU (Master or Slave)
- Integrated web server for device configuration and monitoring data points
- Connection to EnOcean wireless devices (built-in EnOcean interface with external antenna for Europe, 868 MHz) or via LENO-80x
- Integration of actuators via MP-Bus
- DALI Integration of up to 64 DALI lamps (depending on the model)
- Integrated DALI power supply, 16 VDC, 160 mA guaranteed supply current, 250 mA max. supply current
- Test and assignment of DALI devices via the Web interface
- Replacement of DALI devices without additional software tools via the graphic display and jog dial
- Supports up to 16 DALI sensors
- Supports up to 64 DALI pushbuttons
- Supports the control of standard loads in the power grid via LDALI-RM1/LDALI-RM3 Relay Modules
- Integrated Constant Light Controller
- Supports lamp burn-in mode
- Supports periodic testing of DALI emergency lights
- Integrated DALI Protocol Analyzer
- Supports WLAN through LWLAN-800 Interface
- Supports SMI (Standard Motor Interface) through LSMI-80x
- Stores user-defined project documentation

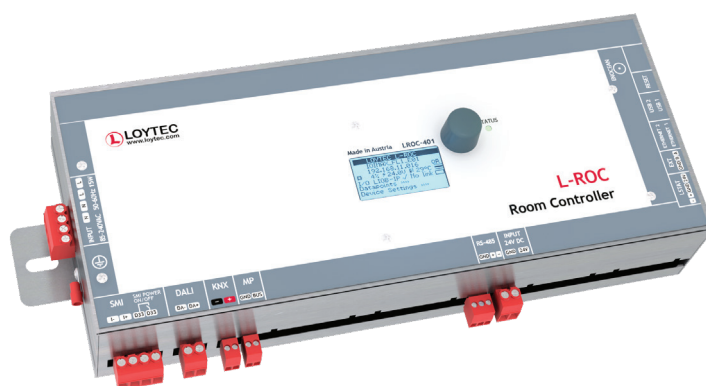

## LROC-400, LROC-401, LROC-402


## General Specifications

|                      |                                                                                                                   |
|----------------------|-------------------------------------------------------------------------------------------------------------------|
| Dimensions (mm)      | 340 x 144 x 70 (L x W x H), DIM047                                                                                |
| Installation         | mountable directly via two oblong holes (ø 7 mm, distance 315 mm)<br>or system distribution box LBOX-ROCx, DIM048 |
| Power supply         | 24 VDC $\pm 10\%$ or 85 – 240 V AC, 50 – 60 Hz (do not connect 24 V DC if SMI or DALI are used)                   |
| Operating conditions | 0 °C to 40 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals)                         |

## Specifications

| Type              | LROC-400                                                                                                                                                                                                                                                                                                                                                                                                                                | LROC-401                                                                                                                                                                                                                                                                                                                                                                                                                                | LROC-402 |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| Power consumption | max 15 W                                                                                                                                                                                                                                                                                                                                                                                                                                | max 15 W                                                                                                                                                                                                                                                                                                                                                                                                                                | max 15 W |
| Interfaces        | 2 x Ethernet (100Base-T):<br>Web services (OPC XML-DA, OPC UA), LonMark IP-852, BACnet/IP*, LIOB-IP, KNXnet/IP,<br>Modbus TCP (Master or Slave), HTTP, FTP, SSH, HTTPS, Firewall, VNC, SNMP<br>1 x L-STAT (Network Thermostat)<br>1 x MP-Bus (actuator)<br>1 x KNX TP1<br>2 x USB-A: WLAN (needs LWLAN-800), EnOcean (needs LENO-80x), SMI (needs LSMI-804)                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                         |          |
|                   | 1 x RS-485 (ANSI TIA/EIA-485):<br>BACnet MS/TP*<br>or<br>Modbus RTU (Master or Slave)<br>1 x DALI with integrated DALI bus<br>power supply 16 VDC,<br>160 mA guaranteed supply<br>current,<br>250 mA max. supply current<br>1 x SMI (Standard Motor<br>Interface Master)<br>1 x EnOcean (Europe 868 MHz)<br>with external antenna<br>1 x EXT:<br>M-Bus, Master EN 13757-3<br>(needs LMBUS-20 or LMBUS-80)<br>or<br>SMI (needs LSMI-800) | 1 x RS-485 (ANSI TIA/EIA-485):<br>BACnet MS/TP*<br>or<br>Modbus RTU (Master or Slave)<br>1 x DALI with integrated DALI bus<br>power supply 16 VDC,<br>160 mA guaranteed supply<br>current,<br>250 mA max. supply current<br>1 x SMI (Standard Motor<br>Interface Master)<br>1 x EnOcean (Europe 868 MHz)<br>with external antenna<br>1 x EXT:<br>M-Bus, Master EN 13757-3<br>(needs LMBUS-20 or LMBUS-80)<br>or<br>SMI (needs LSMI-800) | –        |

\* Router between BACnet/IP and BACnet MS/TP

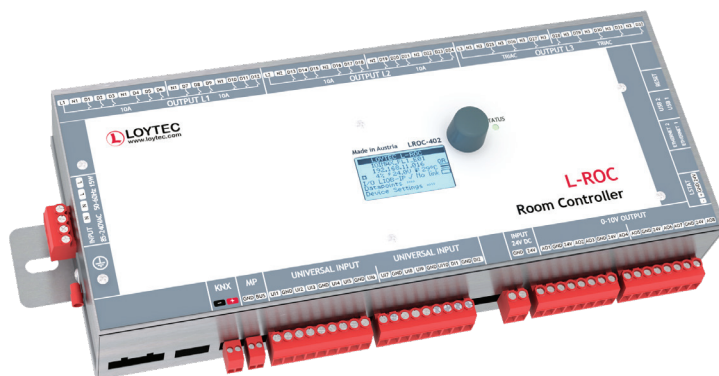



## L-ROC Room Controller

## LROC-400, LROC-401, LROC-402

| Specifications                   |                                                  |                                 |                                           |
|----------------------------------|--------------------------------------------------|---------------------------------|-------------------------------------------|
| Type                             | LROC-400                                         | LROC-401                        | LROC-402                                  |
| Universal Input (UI)             | 10                                               | 0                               | 10                                        |
| Digital Input (DI)               | 2                                                | 0                               | 2                                         |
| Analog Output (AO)               | 8                                                | 0                               | 8                                         |
| Digital Output (DO)              | 32 (24 x Relay, 8 x Triac)                       | 0                               | 32 (24 x Relay, 8 x Triac)                |
| Digital Output specification     | Relay: 10 A<br>Triac: 0,5 A @ 24–240 V AC        | -                               | Relay: 10 A<br>Triac: 0,5 A @ 24–240 V AC |
| Frequency                        | 868.3 MHz                                        | 868.3 MHz                       | -                                         |
| RF Output Power                  | 3 dBm                                            | 3 dBm                           | -                                         |
| L-IOB I/O extension              | 2 L-IOB I/O Modules of Type LIOB-45x or LIOB-55x |                                 |                                           |
| BACnet/IP Router                 | 1                                                |                                 |                                           |
| Program cycle time               | Event-triggered                                  |                                 |                                           |
| Programming, Tools               | L-STUDIO (IEC 61499 based)                       |                                 |                                           |
| Max. number of Rooms/Segments    | 8                                                | 16                              | 8                                         |
| SMI Motors                       | 16                                               | 16                              | 0                                         |
| SMI via LSMI-800                 | 16                                               | 16                              | 0                                         |
| EnOcean devices (868 MHz)        | 32                                               | 64                              | 0                                         |
| EnOcean devices via LENO-80x     | 32                                               | 64                              | 32                                        |
| L-STAT Network Thermostats       | 8                                                | 16                              | 8                                         |
| DALI devices                     | 64                                               | 64                              | 0                                         |
| DALI groups                      | 16                                               | 16                              | -                                         |
| DALI sensors                     | 16                                               | 16                              | -                                         |
| DALI pushbuttons (LDALI-BM1/BM2) | 16 pushbutton coupler                            | 16 pushbutton coupler           | -                                         |
| MP-Bus devices                   | 8 (16 MPL)                                       | 8 (16 MPL)                      | 8 (16 MPL)                                |
| Resource limits                  |                                                  |                                 |                                           |
| Total number of data points      | 30 000                                           | LonMark Alarm Servers           | 1                                         |
| OPC data points                  | 10 000                                           | E-mail templates                | 100                                       |
| BACnet objects                   | 2 000 (analog, binary, multi-state)              | Math objects                    | 100                                       |
| BACnet client mappings           | 5 000                                            | Alarm logs                      | 10                                        |
| BACnet calendar objects          | 25                                               | M-Bus data points               | 1 000                                     |
| BACnet scheduler objects         | 100 (64 data points per object)                  | Modbus data points              | 2 000                                     |
| BACnet notification classes      | 32                                               | KNX TP1 data points             | 1 000                                     |
| Trend logs (BACnet or generic)   | 512 (4 000 000 entries, ≈ 60 MB)                 | KNXnet/IP data points           | 1 000                                     |
| Total trended data points        | 1 000                                            | Connections (Local / Global)    | 2 000 / 250                               |
| CEA-709 network variables (NVs)  | 2 000                                            | Number of L-WEB clients         | 32 (simultaneously)                       |
| CEA-709 Alias NVs                | 2 000                                            | L-IOB I/O Modules (via LIOB-IP) | 2                                         |
| CEA-709 External NVs (polling)   | 1 000                                            | EnOcean data points             | 10 per EnOcean device                     |
| CEA-709 address table entries    | 1 000 (non-ECS mode: 15)                         | SMI devices (per channel)       | 16                                        |
| LonMark Calendars                | 1 (25 calendar patterns)                         | MP-Bus devices                  | 8 (16 MPL)                                |
| LonMark Scheduler                | 100                                              |                                 |                                           |



## LROC-400, LROC-401, LROC-402

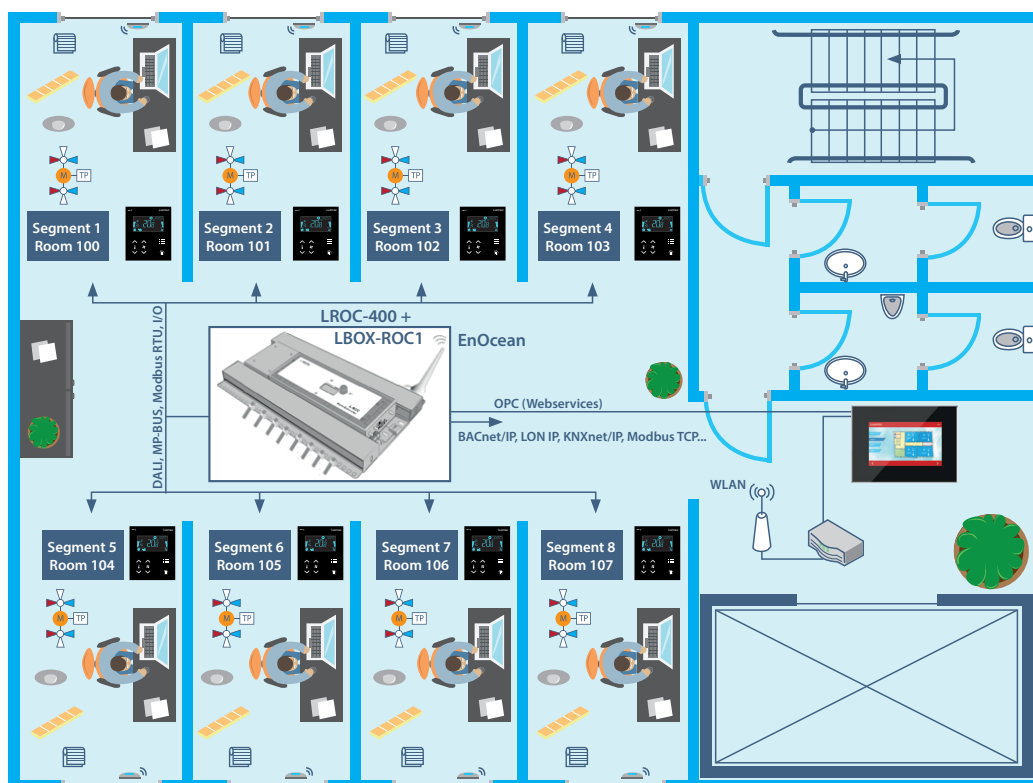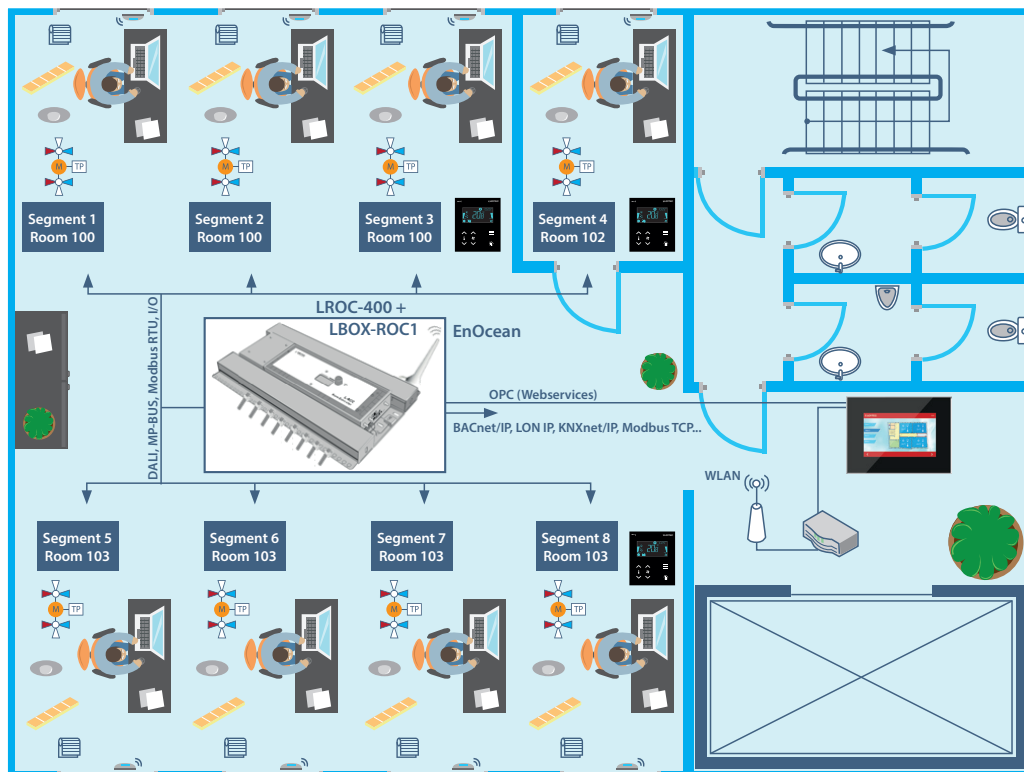

## L-ROC Room Controller

## LROC-400, LROC-401, LROC-402

| Order Number      | Product Description                                                                                                                                                    |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LROC-400          | Room Controller for room segment, aisle, floor, building, or campus management                                                                                         |
| LROC-401          | Room Controller for room segment, aisle, floor, building, or campus management                                                                                         |
| LROC-402          | Room Controller for room segment, aisle, floor, building, or campus management                                                                                         |
| LROC-START-4xx    | Starter Kit: 1 x LROC-4xx, 2 x LSTAT-800-xx-xx, 3 x L-STUDIO software license, 1 x LWEB-900-CP                                                                         |
| LBOX-ROC1         | System Distribution Box for LROC-40x Room Controller, 519 x 280 x 71 (L x W x H in mm)                                                                                 |
| LBOX-ROC2         | System Distribution Box for LROC-40x Room Controller, 60 W 24 V DC power supply                                                                                        |
| L-STUDIO          | L-ROC programming and configuration software                                                                                                                           |
| LENO-800          | EnOcean Interface 868 MHz Europe                                                                                                                                       |
| LENO-801          | EnOcean Interface 902 MHz USA/Canada                                                                                                                                   |
| LENO-802          | EnOcean Interface 928 MHz Japan                                                                                                                                        |
| LWLAN-800         | Wireless LAN Interface IEEE 802.11 bgn                                                                                                                                 |
| LSTAT-800-G3-Lx   | Network Thermostat, black front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, Buttons (Lx)                                               |
| LSTAT-801-G3-Lx   | Network Thermostat, front black, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, Buttons (Lx)                       |
| LSTAT-802-G3-Lx   | Network Thermostat, front black, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, CO2, Buttons (Lx)                  |
| LSTAT-800-G3-L20x | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, IR receiver, Buttons (Lx)                                  |
| LSTAT-801-G3-L20x | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, Buttons (Lx)                       |
| LSTAT-802-G3-L20x | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, CO2, Buttons (Lx)                  |
| LSTAT-80x-CUSTOM  | Customized Network Thermostat, minimum quantity 100 pieces, enclosure G1: grey, G2: black, G3: white; custom print Lx, including 2 working samples, lead time 10 weeks |
| LDALI-MS1         | DALI multi-sensor (motion detection, brightness sensor, IR sensor)                                                                                                     |
| LDALI-MS2         | DALI multi-sensor (presence detection, lux sensor, IR receiver, temperature sensor, humidity sensor, 3 digital inputs)                                                 |
| LDALI-BM1         | Quadruple DALI pushbutton coupler                                                                                                                                      |
| LDALI-BM2         | Quadruple DALI pushbutton coupler                                                                                                                                      |
| LDALI-RM1         | DALI Relay Module 8 A                                                                                                                                                  |
| LDALI-RM2         | DALI Relay Module 8 A, Analog Interface 1 – 10 V                                                                                                                       |
| LDALI-RM3         | DALI Relay Module 10 A, Analog Interface 0 – 10 V and 1 – 10 V                                                                                                         |
| LDALI-RM4         | DALI Relay Module 10 A, Analog Interface 0 – 10 V and 1 – 10 V, "spud-mount"                                                                                           |
| L-TEMP2           | External temperature sensor (NTC10K) for use with L-IOB Universal Inputs                                                                                               |
| LSMI-800          | Standard Motor Interface for 16 motors via EXT port                                                                                                                    |
| LSMI-804          | Standard Motor Interface for 64 motors, 4 SMI channels via USB                                                                                                         |





# L-INX Automation Servers



# L-INX Overview

L-INX Automation Servers are automation stations with a high degree of integration and flexibility. They provide solutions for the following fields of activities:

- Multi-protocol applications with data points of different technologies: CEA-709 (LonMark systems), BACnet, KNX, Modbus, M-Bus, MP-Bus, EnOcean, SMI,
- Direct integration of physical in- and outputs as data points,
- Visualization of data points on PCs or mobile devices with LOYTEC L-WEB software or in OPC SCADA software bundles,
- Automation of single rooms up to primary plants using IEC 61131 programs,
- Used in environments with increased network security requirements,
- Basic automation functions: Alarming, Scheduling, historical Trending,
- Event- or time-driven e-mail notifications for alarms or historical data,
- Universal gateway for the connection of data points of supported network technologies.

## Configuration

For basic configuration, the L-INX offers a web interface and local operations via an LCD display using the built-in jog dial. The advanced configuration is carried out with the L-INX Configurator Software. Data points are created manually, through importing of device templates, data point lists or reading data from connected devices. In LonMark systems, data points can be extracted from the LNS database and necessary bindings can be managed.

## Automation Server


Data points are alarmed, scheduled, and recorded in the automation server. Alarms can be acknowledged and recorded in a local alarm log. Through schedulers and calendars, data points can be allocated with values at certain points in time. The internal clock can be synchronized via NTP or the LonMark Real-Time Keeper. Historical data point values can be recorded periodically, after a value change, or can be triggered. Mathematical objects allow easy calculations and the built-in e-mail client sends notifications e.g. triggered by alarms. Recorded data can be attached to the e-mail as CSV file.

## Programmable logic

Beyond automation functions, there are L-INX models featuring a programmable logic controller (PLC) on a data point basis. It is developed with L-STUDIO or L-OGICAD according to IEC 61131-3 and is able to implement practically any logic via function block diagram or structured text. The data points of the L-INX serve as input, output or flag variables. As data points are generic, the program logic can be developed once and later be adapted to different systems. The PLC can also access terminals that are directly connected to the L-INX via L-IOB I/O modules. LOYTEC offers a library for building automation and HVAC that provides ready-made solutions for typical applications. For details please check the L-STUDIO section (page 31-32).

## Network Security

Nowadays, network security in building automation experiences increased attention. To facilitate system improvements for the integrator, the L-INX features a Secure Mode. Once activated, the L-INX activates an integrated firewall that blocks all unsecure accesses. To ensure authenticity of the data, individual certificates from a certification authority can be requested. The server certificate particularly provides an added value for mobile devices. Thereby, they can verify that they are connected with an authorized L-INX. For OPC based SCADA and visualization packets, the L-INX offers the implementation of Secure Channel with OPC UA that allows encryption and authentication for clients through certificates.

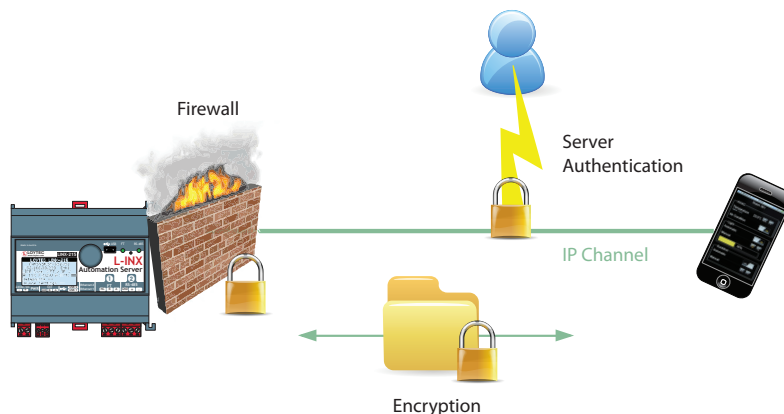




- ✓ BACnet
- ✓ CEA-709
- ✓ KNX
- ✓ Modbus
- ✓ M-Bus
- ✓ OPC
- ✓ MP-Bus



Datasheet #89047919

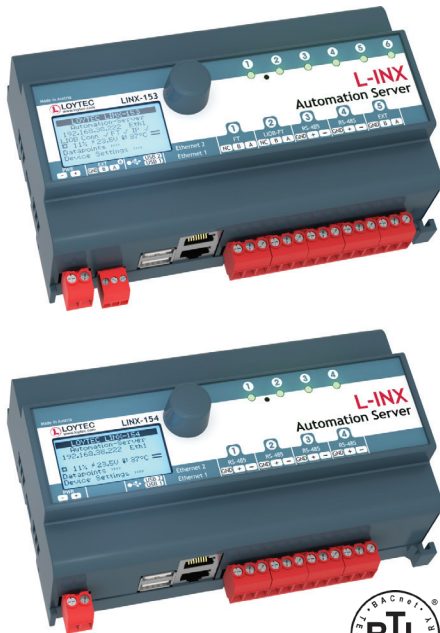

The L-INX Automation Servers LINX-153 and LINX-154 are powerful, programmable automation stations, which can be programmed by L-STUDIO. The L-INX Automation Servers can host user specific graphical pages and can integrate physical I/Os through LIOB I/O Modules via LIOB-Connect, LIOB-FT, or LIOB-IP. The LINX-154 can only be extended by LIOB-IP. Local operation and override is provided by the built-in jog dial and the backlit display (128x64 pixels). Device and data point information is shown on the display via symbols and in text format.

The powerful Automation Servers provide connectivity functions to concurrently integrate CEA-709 (LonMark Systems), BACnet, KNX, Modbus, and M-Bus subsystems. LonMark Systems can be integrated via IP-852 (Ethernet/IP) or TP/FT-10. BACnet integration is supported through BACnet/IP (Ethernet/IP) or BACnet MS/TP (RS-485). LINX-153 Automation Servers feature an integrated Remote Network Interface (RNI) to access the TP/FT-10 channel on the device via Ethernet/IP. LINX-153 Automation Servers feature two built-in routers, one IP-852 router and one BACnet/IP to MS/TP router including BBMD as well as Slave-Proxy functionality providing the complete feature set of the corresponding L-IP devices.

The LINX-153 and LINX-154 implement the BACnet Building Controller (B-BC) profile and are BTL certified. In addition, the LINX-15x provide connectivity to KNXnet/IP (only LINX-153) and Modbus TCP via Ethernet/IP and to Modbus RTU via RS-485. M-Bus and KNX TP1 (only for LINX-153) device integration needs optional interface modules.

The gateway functionality allows data communication between all communication technologies available on the device. Different technology data points are mapped through Local Connections on the device. The mapping of different technology data points on distributed devices is supported by Global Connections. L-INX Automation Servers also support Smart Auto-Connect™ – the automatic generation of connections to substantially reduce engineering efforts and cost. All technology data points are automatically created as OPC XML-DA and OPC UA data points.

Each L-INX Automation Server is equipped with two Ethernet ports. It can either be configured to use the internal switch to interconnect the two ports or every port is configured to work in a separate IP network.


When the Ethernet ports are configured for two separate IP networks, one port can be connected for instance to a WAN (Wide Area Network) with enabled network security (HTTPS) while the second port can be configured to be connected to an insecure network (LAN) where the standard building automation protocols like BACnet/IP, LON/IP, or Modbus TCP are present. These devices also feature firewall functionality of course to isolate particular protocols or services between the ports.

Using the internal switch, a daisy chained line topology of up to 20 devices can be built, which reduces costs for network installation. The IP switch also allows the setup of a redundant Ethernet installation (ring topology), which increases reliability. The redundant Ethernet topology is enabled by the Rapid Spanning Tree Protocol (RSTP), which is supported by most managed switches.

The L-INX devices provide fully featured AST™ functionality (Alarming, Scheduling, and Trending) and can be integrated perfectly into the L-WEB System.

### Features

- Programmable with L-STUDIO IEC 61131-3 and IEC 61499
- Programmable with L-LOGICAD (a L-LOGICAD-LINX license is needed)
- Physical inputs and outputs with L-IOB I/O Modules (LIOB-10x, LIOB-15x, and LIOB-45x/55x for LINX-153) (LIOB-45x/55x for LINX-154)
- 128x64 graphic display with backlight
- Local and remote access to information about device status and data points
- Manual operation using the jog dial or VNC client
- Alarming, Scheduling, and Trending (AST™)
- Event-driven e-mail notification
- Math objects to execute mathematical operations on data points
- Stores customized graphical pages
- Visualization of customized graphical pages through LWEB-900 (Building Management), LWEB-803 (Monitoring and Control), or LWEB-802 (Web Browser)
- Built-in OPC XML-DA and OPC UA server
- Dual switched or separated Ethernet ports
- Access to network statistics
- Compliant with ANSI/ASHRAE 135-2012 and ISO 16484-5:2012 standard
- Supports BACnet MS/TP or BACnet/IP
- BACnet Client Function (Write Property, Read Property, COV Subscription)
- BACnet Client Configuration with configuration tool (scan and EDE import)
- B-BC (BACnet Building Controller) functionality, BTL certified
- Compliant with CEA-709, CEA-852, and ISO/IEC 14908 Standard (LonMark System)
- Supports TP/FT-10 (only LINX-153)
- Support of dynamically created or static NVs
- Support of user-defined NVs (UNVTs) and Configuration Properties (SCPTs, UCPTs)
- Remote Network Interface (RNI) with 2 MNI devices (only LINX-153)
- Integrated BACnet/IP to BACnet MS/TP Router including BBMD as well as Slave-Proxy functionality
- Integrated IP-852 to TP/FT-10 Router (only LINX-153)
- KNXnet/IP, connection to KNX TP1 through LKNX-300 Interface (only LINX-153)
- M-Bus Master according to EN 13757-3, connection via optional M-Bus Converter (only LINX-153) (L-MBUS20 or L-MBUS80)
- Gateway functions including Smart Auto-Connect™
- Modbus TCP and Modbus RTU (Master or Slave)
- Integrated web server for device configuration and monitoring data points
- Configurable via TP/FT-10 (only LINX-153) or Ethernet/IP
- Connection to EnOcean wireless devices via LENO-80x Interface (only LINX-153)
- Supports SMI (Standard Motor Interface) through LSMI-800 or LSMI-804 (only LINX-153)
- Supports MP-Bus through LMPBUS-804 Interface (only LINX-153)
- Supports WLAN through LWLAN-800 Interface
- Stores user-defined project documentation

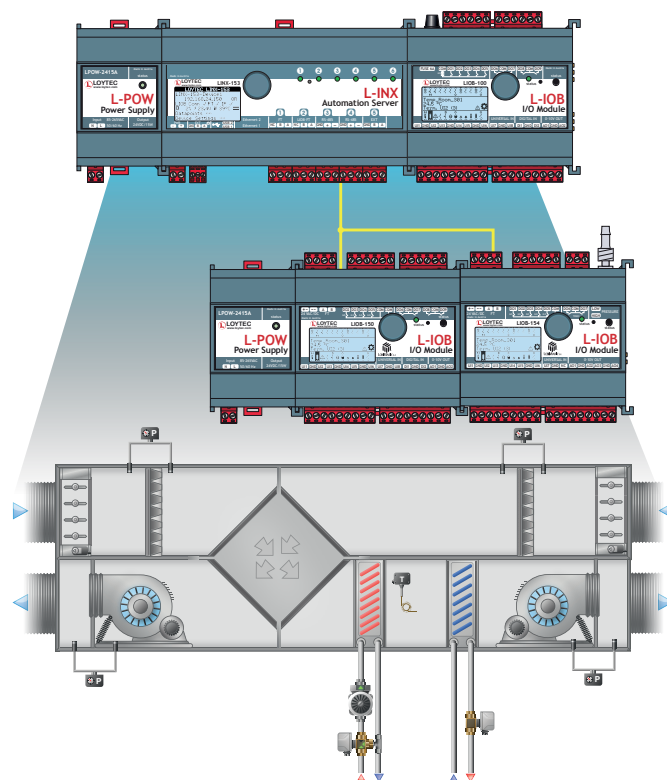

**Specifications LINX-153**

|                          |                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                       |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimensions (mm)          | 159 x 100 x 75 (L x W x H), DIM053                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                       |
| Installation             | DIN rail mounting following DIN 43880, top hat rail EN 50022                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                       |
| Power supply             | 24 VDC / 24 V AC $\pm 10\%$ , typ. 2.5 W                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                       |
| Operating conditions     | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals)                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                       |
| Interfaces (LINX-153)    | 2 x Ethernet (100Base-T):<br>OPC XML-DA, OPC UA,<br>LonMark IP-852,<br>BACnet/IP,<br>LIOB-IP,<br>KNXnet/IP,<br>Modbus TCP (Master or Slave),<br>HTTP, FTP, SSH, HTTPS,<br>Firewall, VNC, SNMP<br>1 x LIOB-Connect<br>1 x TP/FT-10 (LonMark System)<br>1 x LIOB-FT | 2 x RS-485 (ANSI TIA/EIA-485):<br>BACnet MS/TP<br>or<br>Modbus RTU (Master or Slave)<br>2 x EXT:<br>M-Bus, Master EN 13757-3 (needs L-MBUS20 or L-MBUS80)<br>or<br>KNX TP1 (needs LKNX-300)<br>or<br>SMI (needs LSMI-800)<br>2 x USB-A:<br>WLAN (needs LWLAN-800),<br>EnOcean (needs LENO-80x),<br>SMI (needs LSMI-804),<br>MP-Bus (needs LMPBUS-804) |
| L-IOB I/O Modules        | Up to 24 L-IOB I/O Modules in any combination of type LIOB-10x, LIOB-15x, and LIOB-45x/55x                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                       |
| Remote Network Interface | 1 RNI with 2 MNI devices                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                       |
| BACnet/IP Router         | 1                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                       |
| CEA-709 Router           | 1                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                       |
| Program cycle time       | Down to 10 ms                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                       |

**Specifications LINX-154**

|                       |                                                                                                                                                                                 |                                                                                                                              |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Dimensions (mm)       | 159 x 100 x 75 (L x W x H), DIM054                                                                                                                                              |                                                                                                                              |
| Installation          | DIN rail mounting following DIN 43880, top hat rail EN 50022                                                                                                                    |                                                                                                                              |
| Power supply          | 24 VDC / 24 V AC $\pm 10\%$ , typ. 2.5 W                                                                                                                                        |                                                                                                                              |
| Operating conditions  | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals)                                                                                       |                                                                                                                              |
| Interfaces (LINX-154) | 2 x Ethernet (100Base-T):<br>OPC XML-DA, OPC UA,<br>LonMark IP-852,<br>BACnet/IP,<br>LIOB-IP,<br>Modbus TCP (Master or Slave),<br>HTTP, FTP, SSH, HTTPS,<br>Firewall, VNC, SNMP | 4 x RS-485 (ANSI TIA/EIA-485):<br>BACnet MS/TP<br>or<br>Modbus RTU (Master or Slave)<br>2 x USB-A:<br>WLAN (needs LWLAN-800) |
| L-IOB I/O Modules     | Up to 24 L-IOB I/O Modules in any combination of type LIOB-45x/55x                                                                                                              |                                                                                                                              |
| BACnet/IP Router      | 1                                                                                                                                                                               |                                                                                                                              |
| Program cycle time    | Down to 10 ms                                                                                                                                                                   |                                                                                                                              |

**L-STUDIO 3.0 licenses**

| Type               | LINX-153                                                       | LINX-154                                     |
|--------------------|----------------------------------------------------------------|----------------------------------------------|
| Programming, Tools | L-STUDIO (IEC 61131-3 and IEC 61499 based), L-INX Configurator |                                              |
| License            | L-STUDIO: included<br>L-LOGICAD: upgradeable                   | L-STUDIO: included<br>L-LOGICAD: upgradeable |

## L-INX Automation Server


# LINX-153, LINX-154

### Resource limits LINX-153

|                                 |                                     |                              |                     |
|---------------------------------|-------------------------------------|------------------------------|---------------------|
| Total number of data points     | 30 000                              | LonMark Schedulers           | 100                 |
| OPC data points                 | 10 000                              | LonMark Alarm Servers        | 1                   |
| BACnet objects                  | 1 000 (analog, binary, multi-state) | E-mail templates             | 100                 |
| BACnet client mappings          | 5 000                               | Math objects                 | 100                 |
| BACnet calendar objects         | 25                                  | Alarm logs                   | 10                  |
| BACnet scheduler objects        | 100 (64 data points per object)     | M-Bus data points            | 1 000               |
| BACnet notification classes     | 32                                  | Modbus data points           | 2 000               |
| Trend logs (BACnet or generic)  | 512 (4 000 000 entries, ≈ 60 MB)    | MP-Bus devices (per channel) | 16                  |
| Total trended data points       | 1 000                               | KNX TP1 data points          | 1 000               |
| CEA-709 network variables (NVs) | 2 000                               | KNXnet/IP data points        | 1 000               |
| CEA-709 Alias NVs               | 2 000                               | Connections (Local / Global) | 2 000 / 250         |
| CEA-709 External NVs (polling)  | 2 000                               | Number of L-WEB clients      | 32 (simultaneously) |
| CEA-709 address table entries   | 1 000 (non-ECS mode: 15)            | L-IOB I/O Modules            | 24                  |
| LonMark Calendars               | 1 (25 calendar patterns)            | Number of EnOcean devices    | 100                 |
| SML devices (per channel)       | 16                                  | EnOcean data points          | 1 000               |

### Resource limits LINX-154

|                                 |                                     |                               |                          |
|---------------------------------|-------------------------------------|-------------------------------|--------------------------|
| Total number of data points     | 30 000                              | CEA-709 address table entries | 1 000 (non-ECS mode: 15) |
| OPC data points                 | 10 000                              | LonMark Calendars             | 1 (25 calendar patterns) |
| BACnet objects                  | 1 000 (analog, binary, multi-state) | LonMark Schedulers            | 100                      |
| BACnet client mappings          | 5 000                               | LonMark Alarm Servers         | 1                        |
| BACnet calendar objects         | 25                                  | E-mail templates              | 100                      |
| BACnet scheduler objects        | 100 (64 data points per object)     | Math objects                  | 100                      |
| BACnet notification classes     | 32                                  | Alarm logs                    | 10                       |
| Trend logs (BACnet or generic)  | 512 (4 000 000 entries, ≈ 60 MB)    | Modbus data points            | 5 000                    |
| Total trended data points       | 1 000                               | Connections (Local / Global)  | 2 000 / 250              |
| CEA-709 network variables (NVs) | 2 000                               | Number of L-WEB clients       | 32 (simultaneously)      |
| CEA-709 Alias NVs               | 2 000                               | L-IOB I/O Modules             | 24                       |
| CEA-709 External NVs (polling)  | 2 000                               |                               |                          |

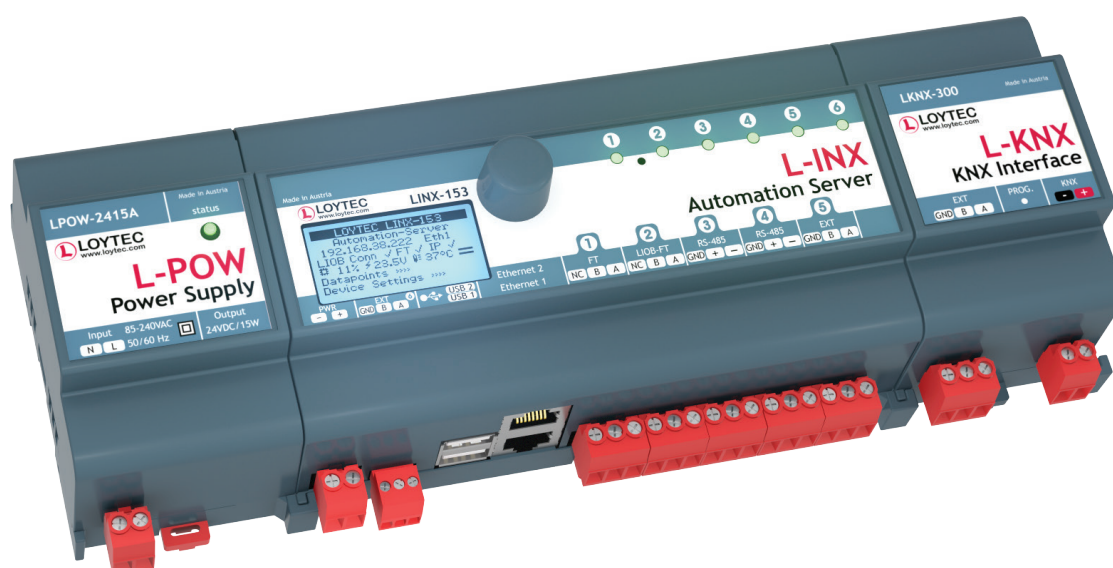



| Order number   | Product description                                                                                  |
|----------------|------------------------------------------------------------------------------------------------------|
| LINX-153       | BACnet & CEA-709 Automation Server with LIOB-Connect and 61131-3 programming in L-STUDIO             |
| LINX-154       | BACnet Automation Server with 4 RS-485 channels                                                      |
| LINX-START-L   | Starter kit: 1 x LINX-153, 2 x L-IOB I/O Module, 1 x LPOW-2415A, and L-STUDIO software license       |
| L-LOGICAD-LINX | License to activate a L-LOGICAD runtime on a single L-INX device (only for LINX-153/154/215 devices) |
| L-STUDIO       | L-ROC programming and configuration software                                                         |
| LIOB-A2        | L-IOB Adapter 2 to split the LIOB-Connect bus using 4-wire cables                                    |
| LIOB-A4        | L-IOB Adapter 4 to split the LIOB-Connect bus using RJ45 network cables                              |
| LIOB-A5        | L-IOB Adapter 5 to terminate the LIOB-Connect bus                                                    |
| LIOB-100       | LIOB-Connect I/O Module: 8 UI, 2 DI, 2 AO, 9 DO (5 x Relay 6 A, 4 x Triac 0.5 A)                     |
| LIOB-101       | LIOB-Connect I/O Module: 8 UI, 16 DI                                                                 |
| LIOB-102       | LIOB-Connect I/O Module: 6 UI, 6 AO, 8 DO (8 x Relay 6 A)                                            |
| LIOB-103       | LIOB-Connect I/O Module: 6 UI, 6 AO, 5 DO (5 x Relay 16 A)                                           |
| LIOB-150       | LIOB-FT I/O Module: 8 UI, 2 DI, 2 AO, 8 DO (4 x Relay 6 A, 4 x Triac 0.5 A)                          |
| LIOB-151       | LIOB-FT I/O Module: 8 UI, 12 DI                                                                      |
| LIOB-152       | LIOB-FT I/O Module: 6 UI, 6 AO, 8 DO (8 x Relay 6 A)                                                 |
| LIOB-153       | LIOB-FT I/O Module: 6 UI, 6 AO, 5 DO (4 x Relay 16 A, 1 x Relay 6 A)                                 |
| LIOB-154       | LIOB-FT I/O Module: 7 UI, 4 AO, 7 DO (5 x Relay 6 A, 2 x Triac 0.5 A), 1 Pressure Sensor             |
| LIOB-450       | LIOB-IP852 I/O Module: 8 UI, 2 DI, 2 AO, 8 DO (4 x Relay 6 A, 4 x Triac 0.5 A)                       |
| LIOB-451       | LIOB-IP852 I/O Module: 8 UI, 12 DI                                                                   |
| LIOB-452       | LIOB-IP852 I/O Module: 6 UI, 6 AO, 8 DO (8 x Relay 6 A)                                              |
| LIOB-453       | LIOB-IP852 I/O Module: 6 UI, 6 AO, 5 DO (4 x Relay 16 A, 1 x Relay 6 A)                              |
| LIOB-454       | LIOB-IP852 I/O Module: 7 UI, 4 AO, 7 DO (5 x Relay 6 A, 2 x Triac 0.5 A), 1 Pressure Sensor          |
| LIOB-550       | LIOB-BIP I/O Module: 8 UI, 2 DI, 2 AO, 8 DO (4 x Relay 6 A, 4 x Triac 0.5 A)                         |
| LIOB-551       | LIOB-BIP I/O Module: 8 UI, 12 DI                                                                     |
| LIOB-552       | LIOB-BIP I/O Module: 6 UI, 6 AO, 8 DO (8 x Relay 6 A)                                                |
| LIOB-553       | LIOB-BIP I/O Module: 6 UI, 6 AO, 5 DO (4 x Relay 16 A, 1 x Relay 6 A)                                |
| LIOB-554       | LIOB-BIP I/O Module: 7 UI, 4 AO, 7 DO (5 x Relay 6 A, 2 x Triac 0.5 A), 1 Pressure Sensor            |
| LPOW-2415A     | LIOB-Connect power supply unit, 24 VDC, 15 W                                                         |
| L-MBUS20       | M-Bus level converter for 20 M-Bus devices                                                           |
| L-MBUS80       | M-Bus level converter for 80 M-Bus devices                                                           |
| LKNX-300       | KNX interface to connect KNX TP1 devices                                                             |
| LENO-800       | EnOcean Interface 868 MHz Europe                                                                     |
| LENO-801       | EnOcean Interface 902 MHz USA/Canada                                                                 |
| LENO-802       | EnOcean Interface 928 MHz Japan                                                                      |
| LWLAN-800      | Wireless LAN Interface IEEE 802.11bgn                                                                |
| LMPBUS-804     | MP-Bus interface for 16 devices per channel, up to 4 channels                                        |
| LSMI-800       | Standard Motor Interface for 16 motors via EXT port                                                  |
| LSMI-804       | Standard Motor Interface for 64 motors, 4 SMI channels via USB                                       |



- ✓ BACnet
- ✓ CEA-709
- ✓ KNX

- ✓ Modbus
- ✓ M-Bus
- ✓ OPC



The L-INX Automation Servers LINUX-215 are programmable automation stations with integrated graphical visualization for central automation tasks in BACnet networks, which can be programmed by L-STUDIO. They can integrate physical I/Os through L-IOB I/O Modules via LIOB-Connect, LIOB-FT, or LIOB-IP. Local operation and override is provided by the built-in jog dial and the backlit display (128x64 pixels). Device and data point information is shown on the display via symbols and in text format.

LonMark Systems can be integrated via IP-852 (Ethernet/IP) or TP/FT-10. In addition, the Automation Servers provides connectivity to concurrently integrate KNX, Modbus, and M-Bus and connect as a gateway data points of different technological origin. The Automaton Servers feature an integrated IP-852 router providing the complete feature set of corresponding L-IP devices.

BACnet can be integrated via BACnet/IP or BACnet MS/TP. In addition, the Automation Servers provide connectivity to concurrently integrate KNX, Modbus, and M-Bus and connect as a gateway data points of different technological origin. Optionally, mathematical objects can be applied within a connection to calculate the data point output values depending on the formula used. The Automaton Servers feature a BACnet/IP router including BBMD as well as Slave-Proxy functionality. LINUX-215 is BTL certified as B-BC (BACnet Building Controller).

The gateway functionality allows data communication between all communication technologies available on the device. Different technology data points are mapped through Local Connections on the device. The mapping of different technology data points on distributed devices is supported by Global Connections. L-INX Automation Servers also support Smart Auto-Connect™ – the automatic generation of connections to substantially reduce engineering efforts and cost. All technology data points are automatically created as OPC XML-DA and OPC UA data points.

Each L-INX Automation Server is equipped with two Ethernet ports. It can either be configured to use the internal switch to interconnect the two ports or every port is configured to work in a separate IP network.

When the Ethernet ports are configured for two separate IP networks, one port can be connected for instance to a WAN (Wide Area Network) with enabled network security (HTTPS) while the second port can be configured to be connected to an insecure network (LAN) where the standard building automation protocols like BACnet/IP, LON/IP, or Modbus TCP are present. These devices also feature fire-wall functionality of course to isolate particular protocols or services between the ports.

Using the internal switch, a daisy chained line topology of up to 20 devices can be built, which reduces costs for network installation. The IP switch also allows the setup of a redundant Ethernet installation (ring topology), which increases reliability. The redundant Ethernet topology is enabled by the Rapid Spanning Tree Protocol (RSTP), which is supported by most managed switches.

The L-INX devices provide fully featured AST™ functionality (Alarming, Scheduling, and Trending) and can be integrated perfectly into the L-WEB System.

### Features

- Programmable with L-STUDIO IEC 61131-3 and IEC 61499
- Programmable with L-LOGICAD (a L-LOGICAD-LINUX license is needed)
- Extension with physical inputs and outputs using L-IOB I/O Modules (LIOB-10x, LIOB-15x, LIOB-45x and LIOB-55x)
- 128x64 graphic display with backlight
- Local and remote access to information about device status and data points
- Manual operation using the jog dial or VNC client
- Alarming, Scheduling, and Trending (AST™)
- Event-driven e-mail notification
- Math objects to execute mathematical operations on data points
- Stores customized graphical pages

- Visualization of customized graphical pages through LWEB-900 (Building Management), LWEB-803 (Monitoring and Control), or LWEB-802 (Web Browser)
- Built-in OPC XML-DA and OPC UA server
- Dual switched or separated Ethernet ports
- Access to network statistics
- Compliant with ANSI/ASHRAE 135-2012 and ISO 16484-5:2012 standard
- Supports BACnet MS/TP or BACnet/IP
- BACnet Client Function (Write Property, Read Property, COV Subscription)
- BACnet Client Configuration with configuration tool (scan and EDE import)
- B-BC (BACnet Building Controller) functionality, BTL certified
- Integrated BACnet/IP to BACnet MS/TP Router including BBMD as well as Slave-Proxy functionality
- Compliant with CEA-709, CEA-852, and ISO/IEC 14908 Standard (LonMark System)
- Support TP/FT-10 or IP-852 (Ethernet/IP)
- Support of dynamically created or static NVs
- Support of user-defined NVs (UNVTs) and Configuration Properties (SCPTs, UCPTs)
- Remote Network Interface (RNI) with 2 MNI devices
- Integrated IP-852 to TP/FT-10 Router
- KNXnet/IP, connection to KNX TP1 through LKNX-300 Interface
- M-Bus Master according to EN 13757-3, connection via optional M-Bus Converter (L-MBUS20 or L-MBUS80)
- Modbus TCP and Modbus RTU (Master or Slave)
- Gateway functions including Smart Auto-Connect™
- Integrated web server for device configuration and monitoring data points
- Configurable via Ethernet/IP or TP/FT-10
- Connection to EnOcean wireless devices via LENO-80x Interface
- Supports SMI (Standard Motor Interface) through LSMI-800
- Supports WLAN through LWLAN-800 Interface
- Supports MP-Bus through LMPBUS-804 Interface
- Stores user-defined project documentation

### Specifications

|                          |                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                           |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimensions (mm)          | 107 x 100 x 75 (L x W x H), DIM045                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                           |
| Installation             | DIN rail mounting following DIN 43880, top hat rail EN 50022                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                           |
| Power supply             | 24 VDC / 24 VAC ±10 %, typ. 2.5 W                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                           |
| Operating conditions     | 0 °C to 50 °C, 10–90 % RH, non condensing, degree of protection: IP40, IP20 (terminals)                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                           |
| Interfaces               | 2 x Ethernet (100Base-T):<br>OPC XML-DA, OPC UA,<br>LonMark IP-852, BACnet/IP,<br>LIOB-IP,<br>KNXnet/IP,<br>Modbus TCP (Master or Slave),<br>HTTP, FTP, SSH, HTTPS,<br>Firewall, VNC, SNMP<br>1 x LIOB-Connect<br>1 x RS-485 (ANSI TIA/EIA-485):<br>BACnet MS/TP<br>or<br>Modbus RTU (Master or Slave) | 1 x FT<br>1 x EXT:<br>M-Bus, Master EN 13757-3<br>(needs L-MBUS20 or L-MBUS80)<br>or<br>KNX TP1 (needs LKNX-300)<br>or<br>SMI (needs LSMI-800)<br>2 x USB-A:<br>WLAN (needs LWLAN-800),<br>EnOcean (needs LENO-80x)<br>SMI (needs LSMI-804),<br>MP-Bus (needs LMPBUS-804) |
| L-IOB I/O Modules        | Up to 8 L-IOB I/O Modules in any combination of type LIOB-10x, LIOB-15x, LIOB-45x and LIOB-55x                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                           |
| BACnet/IP Router         | 1                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                           |
| CEA-709 Router           | 1                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                           |
| Remote Network Interface | 1 RNI with 2 MNI devices                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                           |
| Program cycle time       | Down to 10 ms                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                           |

### L-STUDIO 3.0 licenses

|                    |                                                                |
|--------------------|----------------------------------------------------------------|
| Type               | <b>LINX-215</b>                                                |
| Programming, Tools | L-STUDIO (IEC 61131-3 and IEC 61499 based), L-INX Configurator |
| License            | L-STUDIO: included<br>L-LOGICAD: upgradeable                   |

## LINX-215

| Resource limits                |                                                                                                                                                |                              |                          |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|--------------------------|
| Total number of data points    | 10 000                                                                                                                                         | Address table entries        | 1 000 (non-ECS mode: 15) |
| OPC data points                | 2 000                                                                                                                                          | LonMark Calendars            | 1 (25 calendar patterns) |
| BACnet objects                 | 750 (analog, binary, multi-state)                                                                                                              | LonMark Schedulers           | 100                      |
| BACnet client mappings         | 750                                                                                                                                            | LonMark Alarm Servers        | 1                        |
| BACnet calendar objects        | 25                                                                                                                                             | Total trended data points    | 256                      |
| BACnet scheduler objects       | 100 (64 data points per object)                                                                                                                | E-mail templates             | 100                      |
| BACnet notification classes    | 32                                                                                                                                             | Math objects                 | 100                      |
| Trend logs (BACnet or generic) | 256 (4 000 000 entries, ≈ 60 MB)                                                                                                               | Alarm logs                   | 10                       |
| Network variables (NVs)        | 1 000                                                                                                                                          | M-Bus data points            | 1 000                    |
| Alias NVs                      | 1 000                                                                                                                                          | Modbus data points           | 2 000                    |
| External NVs (polling)         | 1 000                                                                                                                                          | MP-Bus devices (per channel) | 16                       |
| KNXnet/IP com-objects          | 250                                                                                                                                            | KNX TP1 com-objects          | 250                      |
| Connections (Local / Global)   | 1 000 / 250                                                                                                                                    | L-IOB I/O Modules            | 8                        |
| Number of L-WEB clients        | 32 (simultaneously)                                                                                                                            | Number of EnOcean devices    | 25                       |
| SMI devices (per channel)      | 16                                                                                                                                             | EnOcean data points          | 250                      |
| Order number                   | Product description                                                                                                                            |                              |                          |
| LINX-215                       | BACnet Automation Server, B-BC, L-STUDIO programmable, built-in BACnet/IP to MS/TP Router<br>CEA-709 Automation Server, built-in IP-852 Router |                              |                          |
| LINX-START-M                   | Starter kit: 1 x LINX-215, 2 x L-IOB I/O Module, 1 x LPOW-2415A, and L-STUDIO software license                                                 |                              |                          |
| L-LOGICAD-LINX                 | License to activate a L-LOGICAD runtime on a single L-INX device (only for LINX-153/154/215 devices)                                           |                              |                          |
| L-STUDIO                       | L-ROC programming and configuration software                                                                                                   |                              |                          |
| LIOB-100                       | LIOB-Connect I/O Module: 8 UI, 2 DI, 2 AO, 9 DO (5 x Relay 6 A, 4 x Triac 0.5 A)                                                               |                              |                          |
| LIOB-101                       | LIOB-Connect I/O Module: 8 UI, 16 DI                                                                                                           |                              |                          |
| LIOB-102                       | LIOB-Connect I/O Module: 6 UI, 6 AO, 8 DO (8 x Relay 6 A)                                                                                      |                              |                          |
| LIOB-103                       | LIOB-Connect I/O Module: 6 UI, 6 AO, 5 DO (5 x Relay 16 A)                                                                                     |                              |                          |
| LIOB-150                       | LIOB-FT I/O Module: 8 UI, 2 DI, 2 AO, 8 DO (4 x Relay 6 A, 4 x Triac 0.5 A)                                                                    |                              |                          |
| LIOB-151                       | LIOB-FT I/O Module: 8 UI, 12 DI                                                                                                                |                              |                          |
| LIOB-152                       | LIOB-FT I/O Module: 6 UI, 6 AO, 8 DO (8 x Relay 6 A)                                                                                           |                              |                          |
| LIOB-153                       | LIOB-FT I/O Module: 6 UI, 6 AO, 5 DO (4 x Relay 16 A, 1 x Relay 6 A)                                                                           |                              |                          |
| LIOB-154                       | LIOB-FT I/O Module: 7 UI, 4 AO, 7 DO (5 x Relay 6 A, 2 x Triac 0.5 A), 1 Pressure Sensor                                                       |                              |                          |
| LIOB-550                       | LIOB-BIP I/O Module: 8 UI, 2 DI, 2 AO, 8 DO (4 x Relay 6 A, 4 x Triac 0.5 A)                                                                   |                              |                          |
| LIOB-551                       | LIOB-BIP I/O Module: 8 UI, 12 DI                                                                                                               |                              |                          |
| LIOB-552                       | LIOB-BIP I/O Module: 6 UI, 6 AO, 8 DO (8 x Relay 6 A)                                                                                          |                              |                          |
| LIOB-553                       | LIOB-BIP I/O Module: 6 UI, 6 AO, 5 DO (4 x Relay 16 A, 1 x Relay 6 A)                                                                          |                              |                          |
| LIOB-554                       | LIOB-BIP I/O Module: 7 UI, 4 AO, 7 DO (5 x Relay 6 A, 2 x Triac 0.5 A), 1 Pressure Sensor                                                      |                              |                          |
| LPOW-2415A                     | LIOB-Connect power supply unit, 24 VDC, 15 W                                                                                                   |                              |                          |
| L-MBUS20                       | M-Bus level converter for 20 M-Bus devices                                                                                                     |                              |                          |
| L-MBUS80                       | M-Bus level converter for 80 M-Bus devices                                                                                                     |                              |                          |
| LKNX-300                       | KNX interface to connect KNX TP1 devices                                                                                                       |                              |                          |
| LENO-800                       | EnOcean Interface 868 MHz Europe                                                                                                               |                              |                          |
| LENO-801                       | EnOcean Interface 902 MHz USA/Canada                                                                                                           |                              |                          |
| LENO-802                       | EnOcean Interface 928 MHz Japan                                                                                                                |                              |                          |
| LWLAN-800                      | Wireless LAN Interface IEEE 802.11bgn                                                                                                          |                              |                          |
| LMPBUS-804                     | MP-Bus interface for 16 devices per channel, up to 4 channels                                                                                  |                              |                          |
| LSMI-800                       | Standard Motor Interface for 16 motors via EXT port                                                                                            |                              |                          |
| LSMI-804                       | Standard Motor Interface for 64 motors, 4 SMI channels via USB                                                                                 |                              |                          |



# L-IOB I/O Controllers & Modules





# L-IOB I/O Controllers

The L-IOB I/O Controller family of products consists of programmable controllers featuring various I/O configurations. Based on LOYTEC's 32-bit L-CORE platform, the L-IOB I/O Controllers provide first class performance for a wide area of applications.

## Programmable

The built-in PLC functionality makes the L-IOB I/O Controllers a good fit for various control applications in building automation. Like the L-INX Automation Servers, the L-IOB I/O Controllers can be programmed with L-LOGICAD or L-STUDIO in IEC 61131-3. The same application libraries and application programs can be used on L-INX or L-IOB Controller devices. For details please check the L-STUDIO section (page 32).

## LonMark Models

The LIOB-18x I/O Controllers, the LIOB-48x I/O Controllers and the LIOB-586/588/589 communicate in the LonMark system via network variables over TP/FT-10 or Ethernet/IP-852. They come with a freely configurable network variable interface and offer up to 256 address table entries.


## BACnet/IP Models

The LIOB-58x I/O Controllers adhere to the BACnet Building Controller Profile (B-BC) and communicate over Ethernet/IP in the BACnet/IP network. The I/O data points can either be exposed through BACnet server objects or actively fetched from a BACnet server via BACnet client maps on the L-IOB I/O Controllers.


### L-IOB I/O Controllers – IEC 61131-3 programmable

#### LonMark TP/FT-10


##### LIOB-180




##### LIOB-181



##### LIOB-182



##### LIOB-183




##### LIOB-184




#### LonMark IP-852


##### LIOB-480




##### LIOB-481




##### LIOB-482



##### LIOB-483




##### LIOB-484




#### BACnet/IP


##### LIOB-580




##### LIOB-581




##### LIOB-582



##### LIOB-583




##### LIOB-584




#### BACnet/IP and LonMark IP-852


##### LIOB-585




##### LIOB-586




##### LIOB-588



##### LIOB-589






LIOB-18x I/O Controllers are compact, programmable automation stations for LonMark Systems with physical inputs and outputs.

## LonMark TP/FT-10 Channel

LIOB-18x I/O Controllers communicate via twisted pair over a TP/FT-10 channel in the LonMark System. LIOB-18x I/O Controllers offer extended features such as local alarming (SNVT\_alarm and SNVT\_alarm\_2) and local scheduling.

## Local Operation and Override

All L-IOB I/O Controllers are equipped with an LCD display (128x64) with backlight and jog dial for manual local operation and override. Device and data point information is displayed in text form and via graphical symbols.

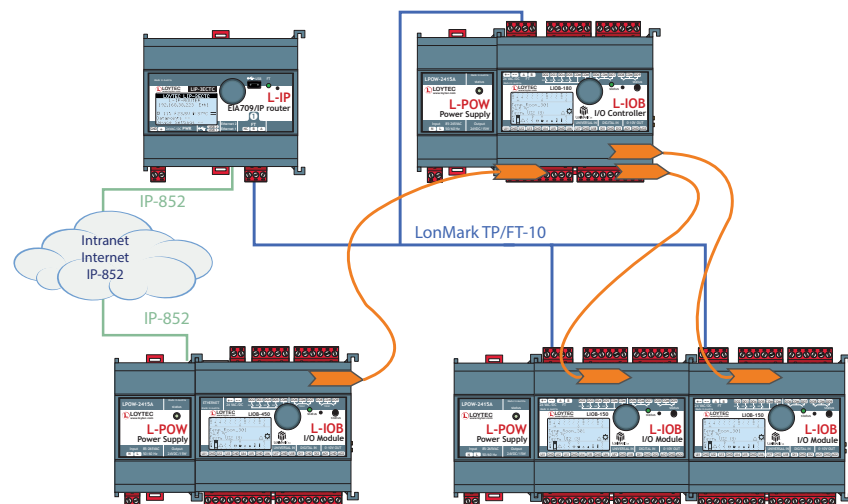

## Features

- Automation station with physical inputs and outputs
- IEC 61131-3 programmable with L-LOGICAD
- 128x64 graphic display with backlight
- Local access to information about device status and data points in clear text and symbols
- Manual operation using the jog dial
- Compliant with CEA-709 and ISO/IEC 14908-2 standard (LonMark System)
- LonMark certified
- SNVT-based interface for integration in the LonMark TP/FT-10 channel
- NV interface can be freely defined
- Up to 256 address table entries (ECS mode)
- LNS plug-in for device configuration in the LonMark System
- Math objects to execute mathematical operations on data points
- LonMark Alarming with nvoAlarm (SNVT\_alarm) and nvoAlarm\_2 (SNVT\_alarm\_2)
- Local Scheduling

## LIOB-FT I/O Controller

# LIOB-180/181/182/183/184 V2

### General specifications

|                      |                                                                                           |
|----------------------|-------------------------------------------------------------------------------------------|
| Dimensions (mm)      | 107 x 100 x 75 (L x W x H), DIM015, DIM016, DIM017                                        |
| Installation         | DIN rail mounting following DIN 43880, top hat rail EN 50022                              |
| Operating conditions | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals) |
| Power supply         | 24 VDC / 24 VAC ±10 %                                                                     |
| Program cycle time   | Down to 10 ms                                                                             |
| Interface            | 1 x LIOB-FT or LonMark TP/FT-10                                                           |

### Resource limits

|                              |                          |
|------------------------------|--------------------------|
| Total number of data points  | 2 000                    |
| Network variables (NVs)      | 200                      |
| Alias NVs                    | 200                      |
| Address table entries        | 256 (non-ECS mode: 15)   |
| LonMark Calendars            | 1 (25 calendar patterns) |
| LonMark Schedulers           | 10                       |
| LonMark Alarm Servers        | 1                        |
| Connections (Local / Global) | 200 / 0                  |

### Specifications LIOB-FT I/O Controller (LIOB-18x)

| Type                         | LIOB-180                                                                                                                                           | LIOB-181 | LIOB-182                   | LIOB-183                             | LIOB-184                              |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------------------------|--------------------------------------|---------------------------------------|
| Power consumption            | 1.7 W<br>2.6 W (Relays on)                                                                                                                         | 1.7 W    | 1.7 W<br>2.7 W (Relays on) | 1.7 W<br>2.5 W (Relays on)           | 1.7 W<br>2.6 W (Relays on)            |
| Universal Input (UI)         | 8                                                                                                                                                  | 8        | 6                          | 6                                    | 7                                     |
| Digital Input (DI)           | 2                                                                                                                                                  | 12       | -                          | -                                    | -                                     |
| Analog Output (AO)           | 2                                                                                                                                                  | -        | 6                          | 6                                    | 4                                     |
| Digital Output (DO)          | 8 (4 x Relay 6 A,<br>4 x Triac 0.5 A)                                                                                                              | -        | 8 (8 x Relay 6 A)          | 5 (4 x Relay 16 A,<br>1 x Relay 6 A) | 7 (5 x Relay 6 A,<br>2 x Triac 0.5 A) |
| Digital Output specification | Please refer to the " <a href="#">General Input and Output Specification of LOYTEC devices</a> " at the end of the L-IOB section for more details. |          |                            |                                      |                                       |
| Differential Pressure Sensor | -                                                                                                                                                  | -        | -                          | -                                    | 0–500 Pa                              |


### L-STUDIO 3.0 licenses

|                    |                                      |
|--------------------|--------------------------------------|
| Type               | LIOB-18x                             |
| Programming, Tools | L-LOGICAD software (IEC 61131-3)     |
| License            | L-STUDIO: n/a<br>L-LOGICAD: included |

### Order number Product description

|               |                                                                                              |
|---------------|----------------------------------------------------------------------------------------------|
| LIOB-180      | LIOB-FT I/O Controller: 8 UI, 2 DI, 2 AO, 8 DO (4 x Relay 6 A, 4 x Triac 0.5 A)              |
| LIOB-181      | LIOB-FT I/O Controller: 8 UI, 12 DI                                                          |
| LIOB-182      | LIOB-FT I/O Controller: 6 UI, 6 AO, 8 DO (8 x Relay 6 A)                                     |
| LIOB-183      | LIOB-FT I/O Controller: 6 UI, 6 AO, 5 DO (4 x Relay 16 A, 1 x Relay 6 A)                     |
| LIOB-184      | LIOB-FT I/O Controller: 7 UI, 4 AO, 7 DO (5 x Relay 6 A, 2 x Triac 0.5 A), 1 Pressure Sensor |
| LINX-START-S  | Starter kit: 1 x L-IOB I/O Controller, 1 x LPOW-2415A, and L-LOGICAD software license        |
| L-LOGICAD-USB | IEC 61131-3 programming tool, single license, includes USB dongle                            |
| LPOW-2415A    | LIOB-Connect power supply unit, 24 VDC, 15 W                                                 |
| LPOW-2415B    | Power supply unit with power connector 24 VDC, 15 W                                          |
| L-TEMP2       | External temperature sensor (NTC10K) for use with L-IOB Universal Inputs                     |





LIOB-48x I/O Controllers are IP-enabled, compact, programmable automation stations for LonMark Systems with physical inputs and outputs and integrated graphical visualization.


### LonMark IP-852 Channel over Ethernet

The LIOB-48x I/O Controller is equipped with two Ethernet ports including a built-in Ethernet switch. This allows for building a daisy chained line topology of up to 20 devices, which reduces costs for network installation. Dual Ethernet port devices also allow the setup of a redundant Ethernet installation (ring topology), which increases reliability. The redundant Ethernet topology is enabled by the Rapid Spanning Tree Protocol (RSTP), which is supported by most managed switches.

Technology data points are automatically exposed as OPC tags for higher level OPC client applications or L-WEB system via the integrated OPC server providing SSL encrypted web services (OPC XML-DA) or UA Secure Conversation (OPC UA). The L-IOB I/O Controllers further allow data exchange over global connections (network-wide data exchange), offer AST™ functions (Alarming, Scheduling, and Trending), store custom graphic pages for visualization in LWEB-802/803, and can be seamlessly integrated in the LWEB-900 Building Management System.

### Local Operation and override

All L-IOB I/O Controllers are equipped with an LCD display (128x64) with backlight and jog dial for manual local operation and override. Device and data point information is displayed in text form and via graphical symbols.

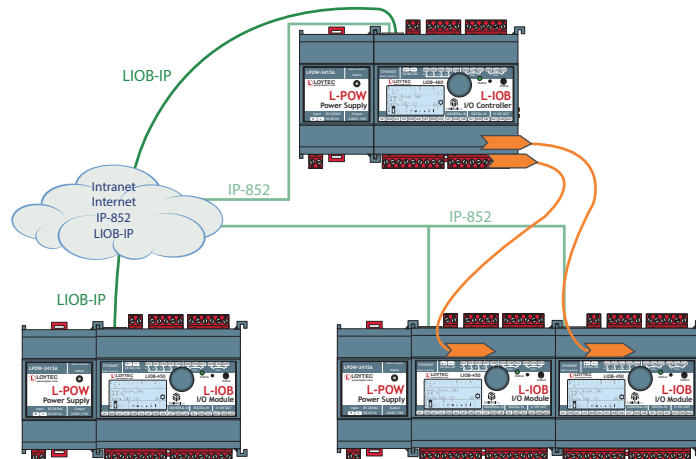



## Features

- Automation station with physical inputs and outputs
- Programmable with L-LOGICAD (IEC 61131-3) or L-STUDIO (IEC 61131-3 or IEC 61499)
- Ethernet/IP interface
- Manual operation using the jog dial or VNC client
- 128x64 graphic display with backlight
- Local access to information about device status and data points in clear text and symbols
- Stores customized graphical pages
- Visualization of customized graphical pages through LWEB-900 (building management), or LWEB-802/803
- Integrated web server for device configuration and monitoring data points
- Extension with physical inputs and outputs using one LIOB I/O Module (LIOB-45x) via plug and play
- Compliant with CEA-852 and ISO/IEC 14908-4 standard (LonMark System)
- LonMark certified
- SNVT-based interface for integration in the LonMark IP-852 channel
- NV interface can be freely defined
- Up to 256 address table entries (ECS mode)
- LNS plug-in for device configuration in the LonMark System
- Alarming, Scheduling, and Trending (AST™)
- Event-driven e-mail notification
- Math objects to execute mathematical operations on data points
- Built-in OPC XML-DA and OPC UA server
- Stores user-defined project documentation

## LIOB-IP852 I/O Controller

# LIOB-480/481/482/483/484 V2

| General Specifications                              |                                                                                                                                                  |                              |                                                                                   |                                      |                                       |
|-----------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-----------------------------------------------------------------------------------|--------------------------------------|---------------------------------------|
| Dimensions (mm)                                     | 107 x 100 x 75 (L x W x H), DIM018, DIM019, DIM020, DIM021, DIM022                                                                               |                              |                                                                                   |                                      |                                       |
| Installation                                        | DIN rail mounting following DIN 43880, top hat rail EN 50022                                                                                     |                              |                                                                                   |                                      |                                       |
| Operating conditions                                | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals)                                                        |                              |                                                                                   |                                      |                                       |
| Power supply                                        | 24 VDC / 24 V AC ±10 %                                                                                                                           |                              |                                                                                   |                                      |                                       |
| Program cycle time                                  | Down to 10 ms                                                                                                                                    |                              |                                                                                   |                                      |                                       |
| L-IOB I/O Module                                    | 1 L-IOB I/O Module of type LIOB-IP852                                                                                                            |                              |                                                                                   |                                      |                                       |
| Interface                                           | 2 x Ethernet (100Base-T):<br>OPC XML-DA, OPC UA<br>LonMark IP-852,<br>LIOB-IP                                                                    |                              |                                                                                   |                                      |                                       |
| Resource limits                                     |                                                                                                                                                  |                              |                                                                                   |                                      |                                       |
| Total number of data points                         | 2 000                                                                                                                                            | Trend logs                   | 50 (390 000 entries, ≈ 6 MB)                                                      |                                      |                                       |
| OPC data points                                     | 300                                                                                                                                              | Total trended data points    | 100                                                                               |                                      |                                       |
| Network variables (NVs)                             | 200                                                                                                                                              | E-mail templates             | 20                                                                                |                                      |                                       |
| Alias NVs                                           | 200                                                                                                                                              | Math objects                 | 20                                                                                |                                      |                                       |
| Address table entries                               | 256 (non-ECS mode: 15)                                                                                                                           | Alarm logs                   | 5                                                                                 |                                      |                                       |
| LonMark Calendars                                   | 1 (25 calendar patterns)                                                                                                                         | Connections (Local / Global) | 200 / 100                                                                         |                                      |                                       |
| LonMark Schedulers                                  | 10                                                                                                                                               | Number of L-WEB clients      | 32                                                                                |                                      |                                       |
| LonMark Alarm Servers                               | 1                                                                                                                                                | L-IOB I/O Module             | 1 (LIOB-IP852)                                                                    |                                      |                                       |
| Specifications LIOB-IP852 I/O Controller (LIOB-48x) |                                                                                                                                                  |                              |                                                                                   |                                      |                                       |
| Type                                                | LIOB-480                                                                                                                                         | LIOB-481                     | LIOB-482                                                                          | LIOB-483                             | LIOB-484                              |
| Power consumption                                   | 4.5 W (Relays on)                                                                                                                                | 4.5 W                        | 4.5 W (Relays on)                                                                 | 4.5 W (Relays on)                    | 4.5 W (Relays on)                     |
| Universal Input (UI)                                | 8                                                                                                                                                | 8                            | 6                                                                                 | 6                                    | 7                                     |
| Digital Input (DI)                                  | 2                                                                                                                                                | 12                           | -                                                                                 | -                                    | -                                     |
| Analog Output (AO)                                  | 2                                                                                                                                                | -                            | 6                                                                                 | 6                                    | 4                                     |
| Digital Output (DO)                                 | 8 (4 x Relay 6 A,<br>4 x Triac 0.5 A)                                                                                                            | -                            | 8 (8 x Relay 6 A)                                                                 | 5 (4 x Relay 16 A,<br>1 x Relay 6 A) | 7 (5 x Relay 6 A,<br>2 x Triac 0.5 A) |
| Digital Output specification                        | Please refer to the <a href="#">"General Input and Output Specification of LOYTEC devices"</a> at the end of the L-IOB section for more details. |                              |                                                                                   |                                      |                                       |
| Differential Pressure Sensor                        | -                                                                                                                                                | -                            | -                                                                                 | -                                    | 0–500 Pa                              |
| L-STUDIO 3.0 licenses                               |                                                                                                                                                  |                              |                                                                                   |                                      |                                       |
| Type                                                | LIOB-48x                                                                                                                                         |                              | LIOB-48x (V2)                                                                     |                                      |                                       |
| Programming, Tools                                  | L-LOGICAD software (IEC 61131-3)                                                                                                                 |                              | L-LOGICAD software (IEC 61131-3)<br>L-STUDIO software (IEC 61131-3 or IEC 61499 ) |                                      |                                       |
| License                                             | L-STUDIO: n/a<br>L-LOGICAD: included                                                                                                             |                              | L-STUDIO: upgradable<br>L-LOGICAD: included                                       |                                      |                                       |
| Order number                                        | Product description                                                                                                                              |                              |                                                                                   |                                      |                                       |
| LIOB-480                                            | LIOB-IP852 I/O Controller: 8 UI, 2 DI, 2 AO, 8 DO (4 x Relay 6 A, 4 x Triac 0.5 A)                                                               |                              |                                                                                   |                                      |                                       |
| LIOB-481                                            | LIOB-IP852 I/O Controller: 8 UI, 12 DI                                                                                                           |                              |                                                                                   |                                      |                                       |
| LIOB-482                                            | LIOB-IP852 I/O Controller: 6 UI, 6 AO, 8 DO (8 x Relay 6 A)                                                                                      |                              |                                                                                   |                                      |                                       |
| LIOB-483                                            | LIOB-IP852 I/O Controller: 6 UI, 6 AO, 5 DO (4 x Relay 16 A, 1 x Relay 6 A)                                                                      |                              |                                                                                   |                                      |                                       |
| LIOB-484                                            | LIOB-IP852 I/O Controller: 7 UI, 4 AO, 7 DO (5 x Relay 6 A, 2 x Triac 0.5 A), 1 Pressure Sensor                                                  |                              |                                                                                   |                                      |                                       |
| LINX-START-S                                        | Starter kit: 1 x L-IOB I/O Controller, 1 x LPOW-2415A, and L-LOGICAD software license                                                            |                              |                                                                                   |                                      |                                       |
| L-STUDIO-LIOB                                       | License to activate a L-STUDIO runtime on a single L-IOB device (only for LIOB-x80/x81/x82/x83/x84 V2 devices)                                   |                              |                                                                                   |                                      |                                       |
| L-LOGICAD-USB                                       | IEC 61131-3 programming tool, single license, includes USB dongle                                                                                |                              |                                                                                   |                                      |                                       |
| LPOW-2415A                                          | LIOB-Connect power supply unit, 24 VDC, 15 W                                                                                                     |                              |                                                                                   |                                      |                                       |
| LPOW-2415B                                          | Power supply unit with power connector 24 VDC, 15 W                                                                                              |                              |                                                                                   |                                      |                                       |
| L-TEMP2                                             | External temperature sensor (NTC10K) for use with L-IOB Universal Inputs                                                                         |                              |                                                                                   |                                      |                                       |

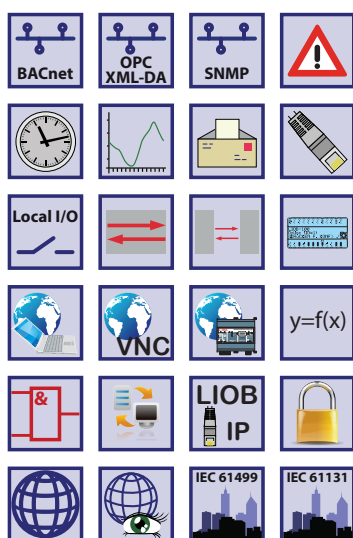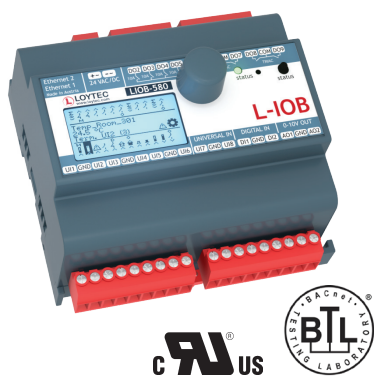

LIOB-58x I/O Controllers are IP-enabled, compact, programmable automation stations for BACnet/IP networks with physical inputs and outputs and integrated graphical visualization.


### BACnet/IP over Ethernet

The LIOB-58x I/O Controller is equipped with two Ethernet ports including a built-in Ethernet switch. This allows for building a daisy chained line topology of up to 20 devices, which reduces costs for network installation. Dual Ethernet port devices also allow the setup of a redundant Ethernet installation (ring topology), which increases reliability. The redundant Ethernet topology is enabled by the Rapid Spanning Tree Protocol (RSTP), which is supported by most managed switches.

Technology data points are automatically exposed as OPC tags for higher level OPC client applications or L-WEB system via the integrated OPC server providing SSL encrypted web services (OPC XML-DA) or UA Secure Conversation (OPC UA). The LIOB I/O Controllers further allow data exchange over global connections (network-wide data exchange), offer AST™ functions (Alarming, Scheduling, and Trending), store custom graphic pages for visualization in LWEB-802/803, and can be seamlessly integrated in the LWEB-900 Building Management System. LIOB-58x I/O Controllers implement the BACnet Building Controller (B-BC) profile and are BTL certified.

### Local Operation and override

All LIOB I/O Controllers are equipped with an LCD display (128x64) with backlight and jog dial for manual local operation and override. Device and data point information is displayed in text form and via graphical symbols.

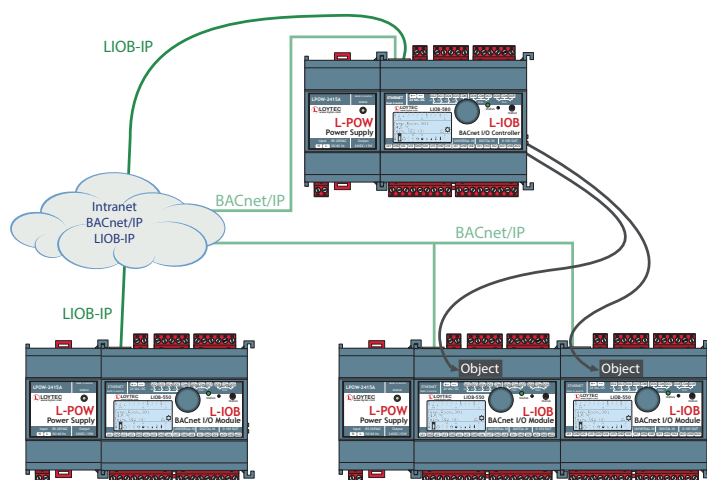

## Features

- Automation station with physical inputs and outputs
- Programmable with L-LOGICAD (IEC 61131-3) or L-STUDIO (IEC 61131-3 or IEC 61499)
- Ethernet/IP interface
- Manual operation using the jog dial or VNC client
- 128x64 graphic display with backlight
- Local access to information about device status and data points in clear text and symbols
- Stores customized graphical pages
- Visualization of customized graphical pages through LWEB-900 (building management), or LWEB-802/803
- Integrated web server for device configuration and monitoring data points
- Extension with physical inputs and outputs using one LIOB I/O Module (LIOB-55x)
- Compliant with ANSI/ASHRAE 135-2012 and ISO 16484-5:2012 standard
- B-BC (BACnet Building Controller) functionality, BTL certified
- BACnet objects for integration in BACnet/IP channels
- BACnet Client Mappings for integration in BACnet/IP channels
- Alarming, Scheduling, and Trending (AST™)
- Event-driven e-mail notification
- Math objects to execute mathematical operations on data points
- Built-in OPC XML-DA and OPC UA server
- Stores user-defined project documentation

## LIOB-BIP I/O Controller

# LIOB-580/581/582/583/584 V2

### General Specifications

|                      |                                                                                         |
|----------------------|-----------------------------------------------------------------------------------------|
| Dimensions (mm)      | 107 x 100 x 75 (L x W x H), DIM018, DIM019, DIM020, DIM021, DIM022                      |
| Installation         | DIN rail mounting following DIN 43880, top hat rail EN 50022                            |
| Operating conditions | 0 °C to 50 °C, 10–90 % RH, non condensing, degree of protection: IP40, IP20 (terminals) |
| Power supply         | 24 VDC / 24 VAC ±10 %                                                                   |
| Program cycle time   | Down to 10 ms                                                                           |
| L-IOB I/O Module     | 1 L-IOB I/O Module of type LIOB-BIP                                                     |
| Interface            | 2 x Ethernet (100Base-T):<br>OPC XML-DA, OPC UA<br>BACnet/IP,<br>LIOB-IP                |

### Resource limits

|                                |                                   |                              |              |
|--------------------------------|-----------------------------------|------------------------------|--------------|
| Total number of data points    | 2 000                             | Total trended data points    | 100          |
| OPC data points                | 300                               | E-mail templates             | 20           |
| BACnet objects                 | 300 (analog, binary, multi-state) | Math objects                 | 20           |
| BACnet client mappings         | 300                               | Alarm logs                   | 5            |
| BACnet calendar objects        | 25                                | Connections (Local / Global) | 200 / 100    |
| BACnet scheduler objects       | 10                                | Number of L-WEB clients      | 32           |
| BACnet notification classes    | 32                                | L-IOB I/O Module             | 1 (LIOB-BIP) |
| Trend logs (BACnet or generic) | 50 (390 000 entries, ≈ 6 MB)      |                              |              |

### Specifications LIOB-BIP I/O Controller (LIOB-58x)



| Type                         | LIOB-580                                                                                                                                         | LIOB-581 | LIOB-582          | LIOB-583                             | LIOB-584                              |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|----------|-------------------|--------------------------------------|---------------------------------------|
| Power consumption            | 4.5 W (Relays on)                                                                                                                                | 4.5 W    | 4.5 W (Relays on) | 4.5 W (Relays on)                    | 4.5 W (Relays on)                     |
| Universal Input (UI)         | 8                                                                                                                                                | 8        | 6                 | 6                                    | 7                                     |
| Digital Input (DI)           | 2                                                                                                                                                | 12       | -                 | -                                    | -                                     |
| Analog Output (AO)           | 2                                                                                                                                                | -        | 6                 | 6                                    | 4                                     |
| Digital Output (DO)          | 8 (4 x Relay 6 A,<br>4 x Triac 0.5 A)                                                                                                            | -        | 8 (8 x Relay 6 A) | 5 (4 x Relay 16 A,<br>1 x Relay 6 A) | 7 (5 x Relay 6 A,<br>2 x Triac 0.5 A) |
| Digital Output specification | Please refer to the <a href="#">"General Input and Output Specification of LOYTEC devices"</a> at the end of the L-IOB section for more details. |          |                   |                                      |                                       |
| Differential Pressure Sensor | -                                                                                                                                                | -        | -                 | -                                    | 0–500 Pa                              |

### L-STUDIO 3.0 licenses

| Type               | LIOB-580/581/582/583/584             | LIOB-580/581/582/583/584 (V2)                                                    |
|--------------------|--------------------------------------|----------------------------------------------------------------------------------|
| Programming, Tools | L-LOGICAD software (IEC 61131-3)     | L-LOGICAD software (IEC 61131-3)<br>L-STUDIO software (IEC 61131-3 or IEC 61499) |
| License            | L-STUDIO: n/a<br>L-LOGICAD: included | L-STUDIO: upgradable<br>L-LOGICAD: included                                      |

| Order number  | Product description                                                                                            |
|---------------|----------------------------------------------------------------------------------------------------------------|
| LIOB-580      | LIOB-BIP I/O Controller: 8 UI, 2 DI, 2 AO, 8 DO (4 x Relay 6 A, 4 x Triac 0.5 A)                               |
| LIOB-581      | LIOB-BIP I/O Controller: 8 UI, 12 DI                                                                           |
| LIOB-582      | LIOB-BIP I/O Controller: 6 UI, 6 AO, 8 DO (8 x Relay 6 A)                                                      |
| LIOB-583      | LIOB-BIP I/O Controller: 6 UI, 6 AO, 5 DO (4 x Relay 16 A, 1 x Relay 6 A)                                      |
| LIOB-584      | LIOB-BIP I/O Controller: 7 UI, 4 AO, 7 DO (5 x Relay 6 A, 2 x Triac 0.5 A), 1 Pressure Sensor                  |
| LINX-START-S  | Starter kit: 1 x L-IOB I/O Controller, 1 x LPOW-2415A, and L-LOGICAD software license                          |
| L-STUDIO-LIOB | License to activate a L-STUDIO runtime on a single L-IOB device (only for LIOB-x80/x81/x82/x83/x84 V2 devices) |
| L-LOGICAD-USB | IEC 61131-3 programming tool, single license, includes USB dongle                                              |
| LPOW-2415A    | LIOB-Connect power supply unit, 24 VDC, 15 W                                                                   |
| LPOW-2415B    | Power supply unit with power connector 24 VDC, 15 W                                                            |
| L-TEMP2       | External temperature sensor (NTC10K) for use with L-IOB Universal Inputs                                       |



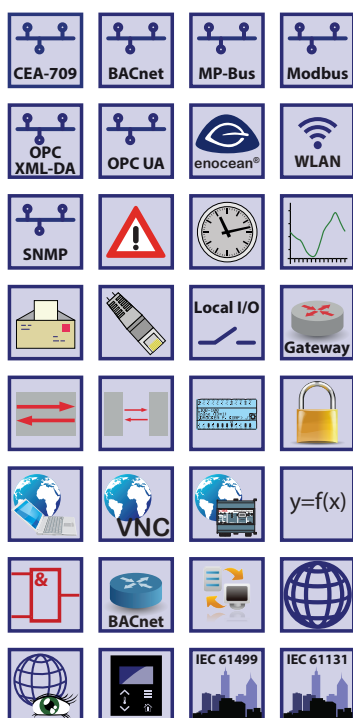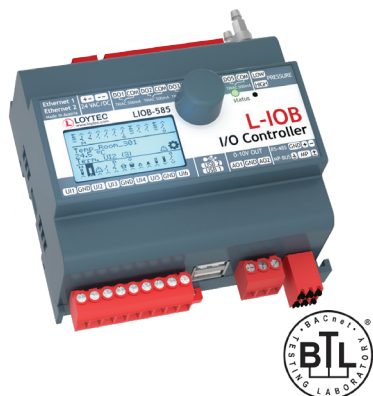

LIOB-585 I/O Controllers are IP-enabled, compact, programmable automation stations for LonMark Systems and BACnet/IP networks with physical inputs and outputs and integrated graphical visualization.

### Communication

The LIOB-585 I/O Controller is equipped with two Ethernet ports including a built-in Ethernet switch. This allows for building a daisy chained line topology of up to 20 devices, which reduces costs for network installation. Dual Ethernet port devices also allow the setup of a redundant Ethernet installation (ring topology), which increases reliability. The redundant Ethernet topology is enabled by the Rapid Spanning Tree Protocol (RSTP), which is supported by most managed switches.

Technology data points are automatically exposed as OPC tags for higher level OPC client applications or L-WEB system via the integrated OPC server providing SSL encrypted web services (OPC XML-DA) or UA Secure Conversation (OPC UA). The L-IOB I/O Controllers further allow data exchange over global connections (network-wide data exchange), offer AST™ functions (Alarming, Scheduling, and Trending), store custom graphic pages for visualization in LWEB-802/803, and can be seamlessly integrated in the LWEB-900 Building Management System. LIOB-585 I/O Controllers implement the BACnet Building Controller (B-BC) profile and are BTL certified.

### Local Operation and override

All L-IOB I/O Controllers are equipped with an LCD display (128x64) with backlight and jog dial for manual local operation and override. Device and data point information is displayed in text form and via graphical symbols.

### Unitary and Terminal Controller

The LIOB-585 is designed to efficiently implement unitary and terminal applications in a compact form factor. The integrated differential pressure sensor, its local I/O, and the built-in MP-Bus port provide connectivity for all unitary and terminal equipment. In addition, the RS-485 port allows connection of L-STAT network thermostats for temperature and air quality measurement and user interaction.

## Features

- Automation station with physical inputs and outputs
- IEC 61131-3 and IEC 61499 programmable with L-STUDIO
- 128x64 graphic display with backlight
- Local and remote access to information about device status and data points
- Manual operation using the jog dial or VNC client
- Alarming, Scheduling, and Trending (AST™)
- Event-driven e-mail notification
- Math objects to execute mathematical operations on data points
- Stores customized graphical pages
- Visualization of customized graphical pages through LWEB-900 (Building Management), LWEB-803 (Monitoring and Control), or LWEB-802 (Web Browser)
- Support of the L-STAT Network Thermostat
- Built-in OPC XML-DA and OPC UA server
- Dual switched or separated Ethernet ports
- Access to network statistics
- Compliant with ANSI/ASHRAE 135-2012 and ISO 16484-5:2012 standard
- Supports BACnet MS/TP and BACnet/IP
- BACnet Client Function (Write Property, Read Property, COV Subscription)
- BACnet Client Configuration with configuration tool (scan and EDE import)
- B-BC (BACnet Building Controller) functionality, BTL certified
- Compliant with CEA-709, CEA-852, and ISO/IEC 14908 Standard (LonMark System)
- Supports IP-852 (Ethernet/ IP)
- Support of dynamically created or static NVs
- Support of user-defined NVs (UNVTs) and Configuration Properties (SCPTs, UCPTs)
- Integrated BACnet/ IP to BACnet MS/ TP Router including BBMD as well as Slave-Proxy functionality

LIOB-585

- Gateway functions including Smart Auto-Connect™
- Integrated web server for device configuration and monitoring data points
- Connection to EnOcean wireless devices via LENO-80x Interface
- Supports WLAN through LWLAN-800 Interface
- Stores user-defined project documentation
- Integration of damper actuator via MP-Bus
- Differential pressure sensor

| General Specifications |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |  |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Dimensions (mm)        | 107 x 100 x 75 (L x W x H), DIM057                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  |
| Installation           | DIN rail mounting following DIN 43880, top hat rail EN 50022                                                                                                                                                                                                                                                                                                                                                                                                                       |  |
| Operating conditions   | 0 °C to 50 °C, 10–90 % RH, non condensing, degree of protection: IP40, IP20 (terminals)                                                                                                                                                                                                                                                                                                                                                                                            |  |
| Power supply           | 24 V DC / 24 V AC ±10 % via L-POW, or with an external power supply                                                                                                                                                                                                                                                                                                                                                                                                                |  |
| Program cycle time     | Down to 10 ms                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |
| Interface              | <div> <div> 2 x Ethernet (100Base-T):<br/> Web services (OPC XML-DA, OPC UA),<br/> LonMark IP-852, BACnet/IP*, Modbus TCP<br/> (Master or Slave), HTTP, FTP, SSH,<br/> HTTPS, Firewall, VNC, SNMP </div> <div> 2 x USB-A:<br/> WLAN (needs LWLAN-800),<br/> EnOcean (needs LENO-80x) </div> </div> <div> 1 x RS-485 (ANSI TIA/EIA-485):<br/> BACnet MS/TP<br/> or<br/> L-STAT Network Thermostats<br/> 1 x MP-Bus </div> <p><i>* Router between BACnet/IP and BACnet MS/TP</i></p> |  |

## Resource limits

|                                 |                                   |                              |                          |
|---------------------------------|-----------------------------------|------------------------------|--------------------------|
| Total number of data points     | 10 000                            | LonMark Calendars            | 1 (25 calendar patterns) |
| OPC data points                 | 1 000                             | LonMark Schedulers           | 10                       |
| BACnet objects                  | 500 (analog, binary, multi-state) | LonMark Alarm Servers        | 1                        |
| BACnet client mappings          | 500                               | E-mail templates             | 50                       |
| BACnet calendar objects         | 25                                | Math objects                 | 50                       |
| BACnet scheduler objects        | 10 (64 data points per object)    | Alarm logs                   | 10                       |
| BACnet notification classes     | 32                                | Modbus data points           | 300                      |
| Trend logs (BACnet or generic)  | 256 (4 000 000 entries, ≈ 60 MB)  | Connections (Local / Global) | 500 / 100                |
| Total trended data points       | 256                               | Number of L-WEB clients      | 32 (simultaneously)      |
| CEA-709 network variables (NVs) | 500                               | L-STAT Network Thermostats   | 8                        |
| CEA-709 Alias NVs               | 500                               | EnOcean devices              | 10                       |
| CEA-709 External NVs (polling)  | 500                               | EnOcean data points          | 100                      |
| CEA-709 address table entries   | 256 (non-ECS mode: 15)            |                              |                          |

## L-STUDIO 3.0 licenses

|                    |                                                                 |
|--------------------|-----------------------------------------------------------------|
| Type               | <b>LIOB-585</b>                                                 |
| Programming, Tools | L-STUDIO software (IEC 61131-3 or IEC 61499), LINX Configurator |
| License            | L-STUDIO: included<br>L-LOGICAD: upgradeable                    |

## Specifications

|                              |                                                                                                                                                    |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| Type                         | <b>LIOB-585</b>                                                                                                                                    |
| Power consumption            | 4.5 W                                                                                                                                              |
| Universal Input (UI)         | 6                                                                                                                                                  |
| Digital Input (DI)           | -                                                                                                                                                  |
| Analog Output (AO)           | 2                                                                                                                                                  |
| Digital Output (DO)          | 5 (5 x Triac 0.5 A)                                                                                                                                |
| Digital Output specification | Please refer to the " <a href="#">General Input and Output Specification of LOYTEC devices</a> " at the end of the L-IOB section for more details. |
| Differential Pressure Sensor | 0–500 Pa                                                                                                                                           |

## L-IOB I/O Controller

## LIOB-585

| Order number      | Product description                                                                                                                                                    |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LIOB-585          | L-IOB I/O Controller: 6 UI, 2 AO, 5 DO (5 x Triac 0.5 A), 1 Pressure Sensor                                                                                            |
| LPOW-2415A        | LIOB-Connect power supply unit, 24 VDC, 15 W                                                                                                                           |
| LPOW-2415B        | Power supply unit with power connector 24 VDC, 15 W                                                                                                                    |
| L-LOGICAD-LIOB    | Upgrade license for L-IOB to activate the L-LOGICAD runtime                                                                                                            |
| L-TEMP2           | External temperature sensor (NTC10K) for use with L-IOB Universal Inputs                                                                                               |
| LENO-800          | EnOcean Interface 868 MHz Europe                                                                                                                                       |
| LENO-801          | EnOcean Interface 902 MHz USA/Canada                                                                                                                                   |
| LENO-802          | EnOcean Interface 928 MHz Japan                                                                                                                                        |
| LWLAN-800         | Wireless LAN Interface IEEE 802.11bgn                                                                                                                                  |
| LSTAT-800-G3-Lx   | Network Thermostat, black front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, Buttons (Lx)                                               |
| LSTAT-801-G3-Lx   | Network Thermostat, front black, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, Buttons (Lx)                       |
| LSTAT-802-G3-Lx   | Network Thermostat, front black, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, CO2, Buttons (Lx)                  |
| LSTAT-800-G3-L20x | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, IR receiver, Buttons (Lx)                                  |
| LSTAT-801-G3-L20x | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, Buttons (Lx)                       |
| LSTAT-802-G3-L20x | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, CO2, Buttons (Lx)                  |
| LSTAT-80x-CUSTOM  | Customized Network Thermostat, minimum quantity 100 pieces, enclosure G1: grey, G2: black, G3: white; custom print Lx, including 2 working samples, lead time 10 weeks |



✓ BACnet  
✓ CEA-709  
KNX


✓ Modbus  
✓ M-Bus  
✓ OPC



L-IOB I/O Controller

LIOB-586/588/589

Datasheet #89046119

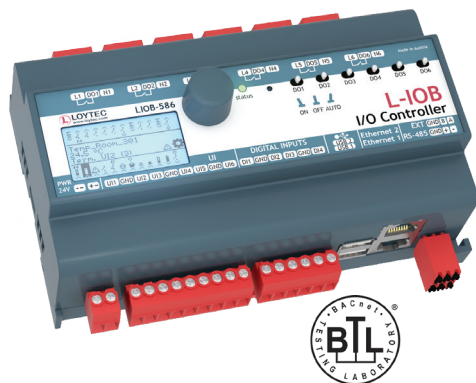

The LIOB-586/588/589 I/O Controllers are IP-enabled, compact, programmable automation stations for LonMark Systems and BACnet/IP networks with physical inputs and outputs and integrated graphical visualization.

### Communication

The LIOB-586/588/589 I/O Controllers are equipped with two Ethernet ports including a built-in Ethernet switch. This allows for building a daisy chained line topology of up to 20 devices, which reduces costs for network installation. Dual Ethernet port devices also allow the setup of a redundant Ethernet installation (ring topology), which increases reliability. The redundant Ethernet topology is enabled by the Rapid Spanning Tree Protocol (RSTP), which is supported by most managed switches.

Technology data points are automatically exposed as OPC tags for higher level OPC client applications or L-WEB system via the integrated OPC server providing SSL encrypted web services (OPC XML-DA) or UA Secure Conversation (OPC UA). The L-IOB I/O Controllers further allow data exchange over global connections (network-wide data exchange), offer AST™ functions (Alarming, Scheduling, and Trending), store custom graphic pages for visualization in LWEB-802/803, and can be seamlessly integrated in the LWEB-900 Building Management System. LIOB-586 I/O Controllers implement the BACnet Building Controller (B-BC) profile and are BTL certified.

### Local Operation and override

All L-IOB I/O Controllers are equipped with an LCD display (128x64) with backlight and jog dial for manual local operation and override. Device and data point information is displayed in text form and via graphical symbols.

The six relay outputs can be overridden via 3-way switches on the LIOB-586 front panel.

### Power measurement

External meters can be integrated via M-Bus or Modbus. The LIOB-586/588/589 I/O Controllers perfectly meet energy management and energy reporting applications.

## Features

- Automation station with physical inputs and outputs
- IEC 61131-3 and IEC 61499 programmable with L-STUDIO
- Programmable with L-LOGICAD (a L-LOGICAD-LINX license is needed for LIOB-588 and LIOB-589 only)
- Extension with physical inputs and outputs using one L-IOB I/O Module (LIOB-10x or LIOB-45x/55x)
- 128x64 graphic display with backlight
- Local and remote access to information about device status and data points
- Manual operation using the jog dial or VNC client
- Manual override of each output through switches (LIOB-586 only)
- Alarming, Scheduling, and Trending (AST™)
- Event-driven e-mail notification
- Math objects to execute mathematical operations on data points
- Stores customized graphical pages
- Visualization of customized graphical pages through LWEB-900 (Building Management), LWEB-803 (Monitoring and Control), or LWEB-802 (Web Browser)
- Support of the L-STAT Network Thermostat
- Built-in OPC XML-DA and OPC UA server
- Dual switched or separated Ethernet ports
- Access to network statistics
- Compliant with ANSI/ASHRAE 135-2012 and ISO 16484-5:2012 standard
- Supports BACnet MS/TP and BACnet/IP
- BACnet Client Function (Write Property, Read Property, COV Subscription)
- BACnet Client Configuration with configuration tool (scan and EDE import)
- B-BC (BACnet Building Controller) functionality, BTL certified
- Compliant with CEA-709, CEA-852, and ISO/IEC 14908 Standard (LonMark System)

L-IOB I/O Controller

LIOB-586/588/589

- Supports IP-852 (Ethernet/IP)
- Support of dynamically created or static NVs
- Support of user-defined NVs (UNVTs) and Configuration Properties (SCPTs, UCPTs)
- Integrated BACnet/IP to BACnet MS/TP Router including BBMD as well as Slave-Proxy functionality
- M-Bus Master according to EN 13757-3, connection via optional M-Bus Converter (L-MBUS20 or L-MBUS80)
- Gateway functions including Smart Auto-Connect™
- Modbus TCP and Modbus RTU (Master or Slave)
- Integrated web server for device configuration and monitoring data points
- Connection to EnOcean wireless devices via LENO-80x Interface
- Supports WLAN through LWLAN-800 Interface
- Stores user-defined project documentation

| General Specifications                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                    |                                    |
|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|------------------------------------|
| Type                                        | LIOB-586                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | LIOB-588                           | LIOB-589                           |
| Dimensions (mm)                             | 159 x 100 x 75 (L x W x H), DIM005                                                                                                                                                                                                                                                                                                                                                                                                                                        | 159 x 100 x 75 (L x W x H), DIM006 | 159 x 100 x 75 (L x W x H), DIM007 |
| Installation                                | DIN rail mounting following DIN 43880, top hat rail EN 50022                                                                                                                                                                                                                                                                                                                                                                                                              |                                    |                                    |
| Operating conditions                        | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals)                                                                                                                                                                                                                                                                                                                                                                                 |                                    |                                    |
| Power supply                                | 24 VDC / 24 V AC ±10 % via L-POW, or with an external power supply                                                                                                                                                                                                                                                                                                                                                                                                        |                                    |                                    |
| Program cycle time                          | Down to 10 ms, and event-triggered                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                    |                                    |
| L-IOB I/O Module                            | 1 L-IOB I/O Module of type LIOB-10x or LIOB-45x/55x                                                                                                                                                                                                                                                                                                                                                                                                                       |                                    |                                    |
| Interface                                   | 2 x Ethernet (100Base-T):<br>Web services (OPC XML-DA, OPC UA), LonMark IP-852, BACnet/IP*, LIOB-IP, Modbus TCP (Master or Slave), HTTP, FTP, SSH, HTTPS, Firewall, VNC, SNMP<br>1 x LIOB-Connect<br>2 x USB-A:<br>WLAN (needs LWLAN-800), EnOcean (needs LENO-80x)<br>1 x EXT:<br>M-Bus, Master EN 13757-3 (needs L-MBUS20 or L-MBUS80)<br>1 x RS-485 (ANSI TIA/ EIA-485):<br>BACnet MS/ TP*,<br>or<br>Modbus RTU (Master or Slave),<br>or<br>L-STAT Network Thermostats |                                    |                                    |
| * Router between BACnet/IP and BACnet MS/TP |                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                    |                                    |



| Specifications LIOB I/O Controller (LIOB-58x) |                                                                                                                                                    |                    |                    |
|-----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|--------------------|
| Type                                          | LIOB-586                                                                                                                                           | LIOB-588           | LIOB-589           |
| Power consumption                             | 5.4 W (Relays on)                                                                                                                                  | 5.9 W (Relays on)  | 4.5 W (Relays on)  |
| Universal Input (UI)                          | 6                                                                                                                                                  | 10                 | 10                 |
| Digital Input (DI)                            | 4                                                                                                                                                  | -                  | 6                  |
| Analog Output (AO)                            | -                                                                                                                                                  | 6                  | 6                  |
| Digital Output (DO)                           | 6 (6 x Relay 16 A)                                                                                                                                 | 8 (8 x Relay 10 A) | 4 (4 x Relay 10 A) |
| Digital Output specification                  | Please refer to the " <a href="#">General Input and Output Specification of LOYTEC devices</a> " at the end of the L-IOB section for more details. |                    |                    |


| L-STUDIO 3.0 licenses |                                            |                                              |                                              |
|-----------------------|--------------------------------------------|----------------------------------------------|----------------------------------------------|
| Type                  | LIOB-586                                   | LIOB-588                                     | LIOB-589                                     |
| Programming, Tools    | L-STUDIO (IEC 61131-3 and IEC 61499 based) |                                              |                                              |
| License               | L-STUDIO: included<br>L-LOGICAD: included  | L-STUDIO: included<br>L-LOGICAD: upgradeable | L-STUDIO: included<br>L-LOGICAD: upgradeable |

### Resource limits

|                                 |                                   |                              |                     |
|---------------------------------|-----------------------------------|------------------------------|---------------------|
| Total number of data points     | 10 000                            | LonMark Schedulers           | 10                  |
| OPC data points                 | 1 000                             | LonMark Alarm Servers        | 1                   |
| BACnet objects                  | 500 (analog, binary, multi-state) | E-mail templates             | 50                  |
| BACnet client mappings          | 500                               | Math objects                 | 50                  |
| BACnet calendar objects         | 25                                | Alarm logs                   | 10                  |
| BACnet scheduler objects        | 10 (64 data points per object)    | M-Bus data points            | 300                 |
| BACnet notification classes     | 32                                | Modbus data points           | 300                 |
| Trend logs (BACnet or generic)  | 256 (4 000 000 entries, ≈ 60 MB)  | Connections (Local / Global) | 500 / 100           |
| Total trended data points       | 256                               | Number of L-WEB clients      | 32 (simultaneously) |
| CEA-709 network variables (NVs) | 500                               | L-IOB I/O Modules            | 1                   |
| CEA-709 Alias NVs               | 500                               | L-STAT Network Thermostats   | 8                   |
| CEA-709 External NVs (polling)  | 500                               | EnOcean devices              | 10                  |
| CEA-709 address table entries   | 256 (non-ECS mode: 15)            | EnOcean data points          | 100                 |
| LonMark Calendars               | 1 (25 calendar patterns)          |                              |                     |

| Order number      | Product description                                                                                                                                                    |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LIOB-586          | LIOB I/O Controller: 6 UI, 4 DI, 6 DO (6 x Relay 16 A)                                                                                                                 |
| LIOB-588          | LIOB I/O Controller: 10 UI, 6 AO, 8 DO (6 x Relay 10 A)                                                                                                                |
| LIOB-589          | LIOB I/O Controller: 10 UI, 6 AO, 6 DI, 4 DO (4x Relay 10 A)                                                                                                           |
| L-LOGICAD-LIOB    | License to activate a L-LOGICAD runtime on a single L-IOB device (only for LIOB-588 / LIOB-589 devices)                                                                |
| LPOW-2415A        | LIOB-Connect power supply unit, 24 V DC, 15 W                                                                                                                          |
| LPOW-2415B        | Power supply unit with power connector 24 VDC, 15 W                                                                                                                    |
| L-TEMP2           | External temperature sensor (NTC10K) for use with L-IOB Universal Inputs                                                                                               |
| LENO-800          | EnOcean Interface 868 MHz Europe                                                                                                                                       |
| LENO-801          | EnOcean Interface 902 MHz USA/Canada                                                                                                                                   |
| LENO-802          | EnOcean Interface 928 MHz Japan                                                                                                                                        |
| LWLAN-800         | Wireless LAN Interface IEEE 802.11bgn                                                                                                                                  |
| L-MBUS20          | M-Bus level converter for 20 M-Bus devices                                                                                                                             |
| L-MBUS80          | M-Bus level converter for 80 M-Bus devices                                                                                                                             |
| LSTAT-800-G3-Lx   | Network Thermostat, black front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, Buttons (Lx)                                               |
| LSTAT-801-G3-Lx   | Network Thermostat, front black, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, Buttons (Lx)                       |
| LSTAT-802-G3-Lx   | Network Thermostat, front black, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, CO2, Buttons (Lx)                  |
| LSTAT-800-G3-L20x | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, IR receiver, Buttons (Lx)                                  |
| LSTAT-801-G3-L20x | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, Buttons (Lx)                       |
| LSTAT-802-G3-L20x | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, CO2, Buttons (Lx)                  |
| LSTAT-80x-CUSTOM  | Customized Network Thermostat, minimum quantity 100 pieces, enclosure G1: grey, G2: black, G3: white; custom print Lx, including 2 working samples, lead time 10 weeks |

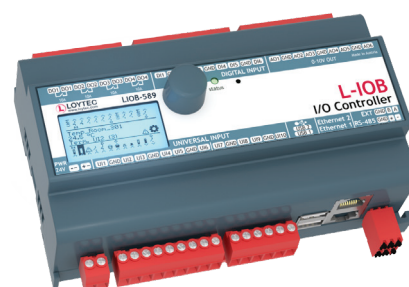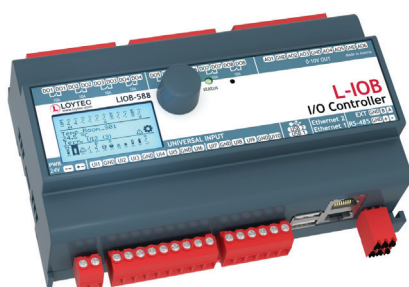

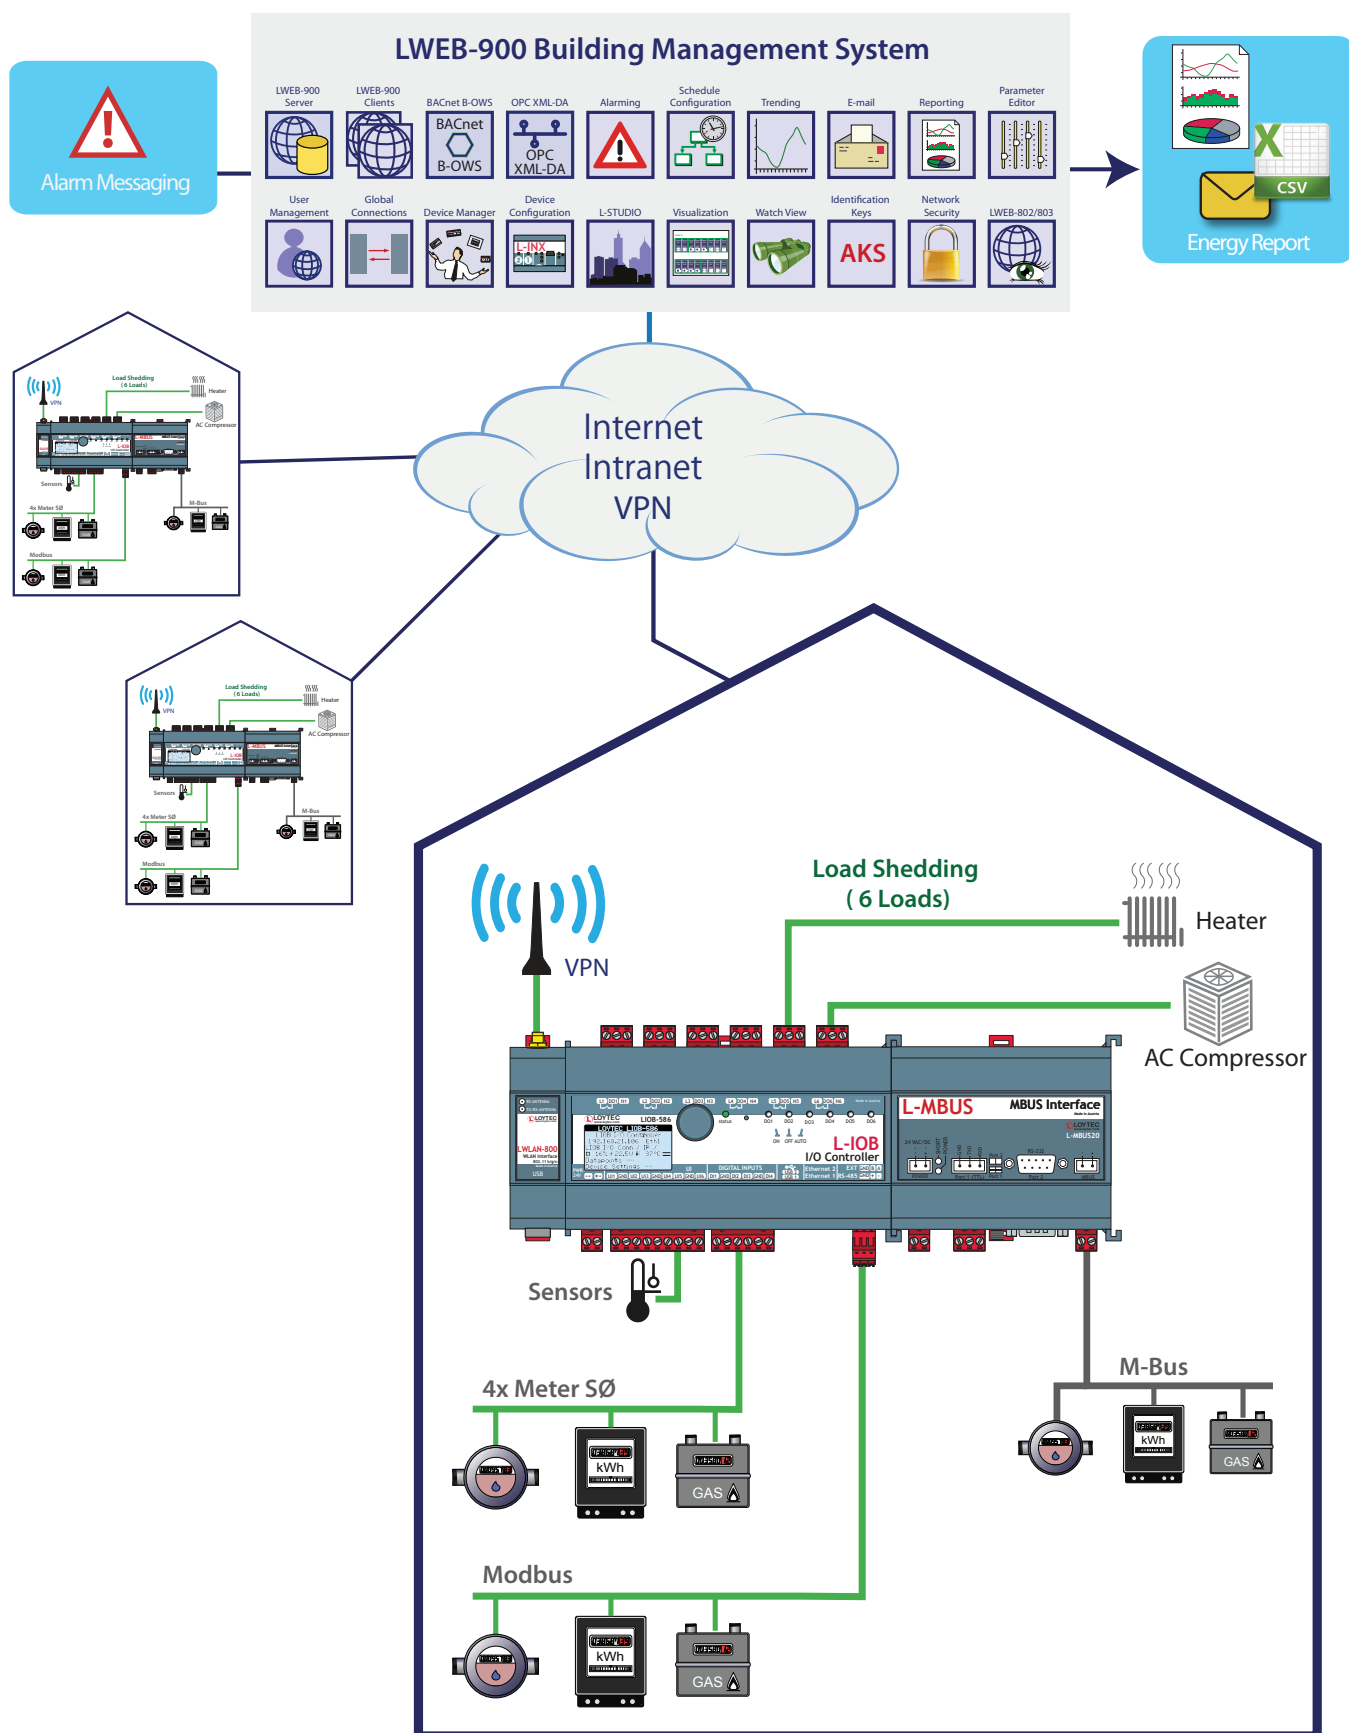



The L-IOB I/O Module family of products consists of intelligent input/output devices featuring various I/O configurations. Based on LOYTEC's 32-bit L-CORE platform, the L-IOB I/O Modules provide first class performance for a wide area of applications.

## Plug and play installation

The L-IOB I/O Modules can be used as I/O extensions for L-INX Automation Servers, L-ROC Room Controllers, and LIOB-48x/58x I/O Controllers. The connection is done via gold-plated contacts on the side (LIOB-Connect), twisted pair (LIOB-FT), or Ethernet/IP (LIOB-IP852 or LIOB-BIP), depending on the L-IOB model.

## LonMark Models


The LIOB-15x I/O Modules and LIOB-45x I/O Modules are LonMark certified I/O nodes which communicate in the LonMark system via network variables over TP/FT-10 or Ethernet/IP-852 respectively.

## BACnet/IP Models

The LIOB-55x I/O Modules adhere to the BACnet Building Controller Profile (B-BC) and communicate over Ethernet/IP in the BACnet/IP network. The I/O data points can either be exposed through BACnet server objects or actively fetched from a BACnet server via BACnet client maps on the L-IOB I/O Modules.

### L-IOB I/O Modules

| LIOB-Connect                                    | LonMark TP/FT-10                                 | LonMark IP-852                                   | BACnet/IP                                        |
|-------------------------------------------------|--------------------------------------------------|--------------------------------------------------|--------------------------------------------------|
| <b>LIOB-100</b><br>8 UI<br>2 DI<br>2 AO<br>9 DO | <b>LIOB-150</b><br>8 UI<br>2 DI<br>2 AO<br>8 DO  | <b>LIOB-450</b><br>8 UI<br>2 DI<br>2 AO<br>8 DO  | <b>LIOB-550</b><br>8 UI<br>2 DI<br>2 AO<br>8 DO  |
| <b>LIOB-101</b><br>8 UI<br>16 DI                | <b>LIOB-151</b><br>8 UI<br>12 DI                 | <b>LIOB-451</b><br>8 UI<br>12 DI                 | <b>LIOB-551</b><br>8 UI<br>12 DI                 |
| <b>LIOB-102</b><br>6 UI<br>6 AO<br>8 DO         | <b>LIOB-152</b><br>6 UI<br>6 AO<br>8 DO          | <b>LIOB-452</b><br>6 UI<br>6 AO<br>8 DO          | <b>LIOB-552</b><br>6 UI<br>6 AO<br>8 DO          |
| <b>LIOB-103</b><br>6 UI<br>6 AO<br>5 DO         | <b>LIOB-153</b><br>6 UI<br>6 AO<br>5 DO          | <b>LIOB-453</b><br>6 UI<br>6 AO<br>5 DO          | <b>LIOB-553</b><br>6 UI<br>6 AO<br>5 DO          |
| <b>LIOB-A2/A4/A5</b><br>L-IOB Adapter 2         | <b>LIOB-154</b><br>7 UI<br>4 AO<br>7 DO<br>PRESS | <b>LIOB-454</b><br>7 UI<br>4 AO<br>7 DO<br>PRESS | <b>LIOB-554</b><br>7 UI<br>4 AO<br>7 DO<br>PRESS |




LIOB-10x I/O Modules extend L-INX Automation Servers, L-ROC Room Controllers, and LIOB-586/588/589 I/O Controllers with physical inputs and outputs. Several LIOB-10x models with different I/O configurations are available.

### LIOB-Connect

The LIOB-10x Modules have gold-plated connectors (LIOB-Connect) to string multiple devices together and connect them to the L-INX or L-ROC. The L-INX or L-ROC automatically recognize the LIOB-10x I/O Modules and provide the resulting data points.


### Local Operation and override

All L-IOB I/O Modules are equipped with an LCD display (128x64) with backlight and jog dial for manual local operation. Device and data point information is displayed in text form and via graphical symbols.

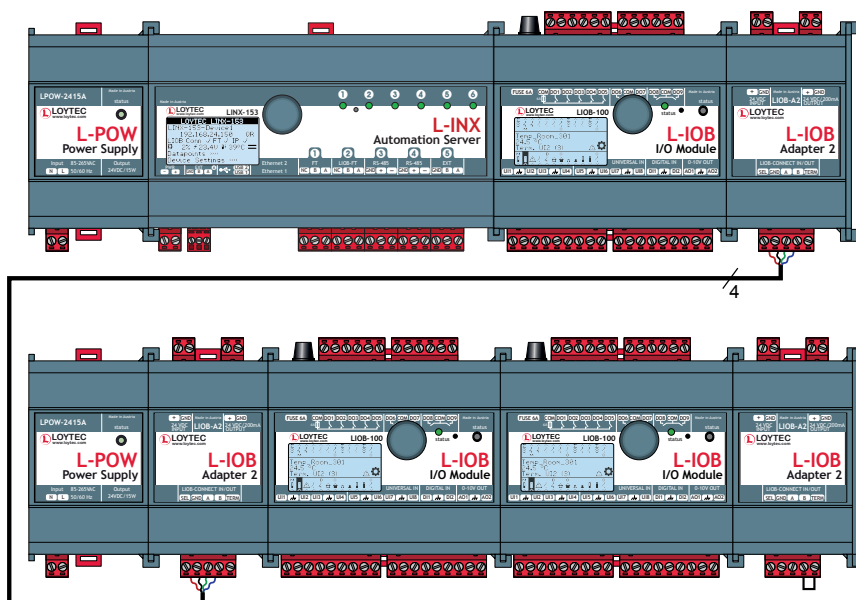

### Features

- I/O module with physical inputs and outputs
- Connected to L-INX Automation Server, L-ROC Room Controller, or LIOB-586/588/589 I/O Controller via LIOB-Connect
- Manual operation using the jog dial
- 128x64 graphic display with backlight
- Local access to information about device status and data points in clear text and symbols
- Automatic integration into device configurations with L-INX, L-ROC and LIOB-586/588/589
- Easy device replacement without any additional software

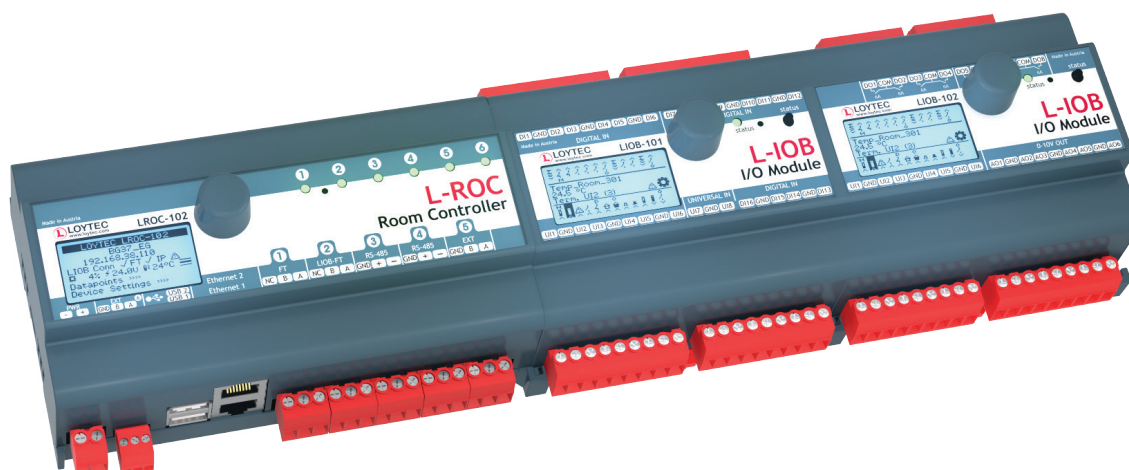

## General Specifications

|                      |                                                                                                                                                       |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimensions (mm)      | 107 x 100 x 75 (L x W x H), DIM011, DIM012, DIM013, DIM014                                                                                            |
| Installation         | DIN rail mounting following DIN 43880, top hat rail EN 50022                                                                                          |
| Operating conditions | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals)                                                             |
| Power supply         | 24 VDC / 24 VAC $\pm 10$ % via L-INX, L-ROC, or L-POW, or with LIOB-Connect, or via connecting of an external power supply to the upper left terminal |
| Interfaces           | 1 x LIOB-Connect                                                                                                                                      |

## Specifications LIOB-Connect

|                              |                                                                                                                                                    |                 |                            |                            |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------------|----------------------------|
| Installation                 | Attachable (max. 4 modules) or connected with a 4-wire cable, max. 50 m                                                                            |                 |                            |                            |
| Type                         | <b>LIOB-100</b>                                                                                                                                    | <b>LIOB-101</b> | <b>LIOB-102</b>            | <b>LIOB-103</b>            |
| Power consumption            | 1.7 W<br>2.6 W (Relays on)                                                                                                                         | 1.7 W           | 1.7 W<br>2.7 W (Relays on) | 1.7 W<br>2.5 W (Relays on) |
| Universal Input (UI)         | 8                                                                                                                                                  | 8               | 6                          | 6                          |
| Digital Input (DI)           | 2                                                                                                                                                  | 16              | -                          | -                          |
| Analog Output (AO)           | 2                                                                                                                                                  | -               | 6                          | 6                          |
| Digital Output (DO)          | 9 (5 x Relay 6 A,<br>4 x Triac 0.5 A)                                                                                                              | -               | 8 (8 x Relay 6 A)          | 5 (5 x Relay 6 A)          |
| Digital Output specification | Please refer to the " <a href="#">General Input and Output Specification of LOYTEC devices</a> " at the end of the L-IOB section for more details. |                 |                            |                            |

| Order number | Product description                                                              |
|--------------|----------------------------------------------------------------------------------|
| LIOB-100     | LIOB-Connect I/O Module: 8 UI, 2 DI, 2 AO, 9 DO (5 x Relay 6 A, 4 x Triac 0.5 A) |
| LIOB-101     | LIOB-Connect I/O Module: 8 UI, 16 DI                                             |
| LIOB-102     | LIOB-Connect I/O Module: 6 UI, 6 AO, 8 DO (8 x Relay 6 A)                        |
| LIOB-103     | LIOB-Connect I/O Module: 6 UI, 6 AO, 5 DO (5 x Relay 16 A)                       |
| LIOB-A2      | L-IOB Adapter 2 to split the LIOB-Connect bus using 4-wire cables                |
| LIOB-A4      | L-IOB Adapter 4 to split the LIOB-Connect bus using RJ45 network cables          |
| LIOB-A5      | L-IOB Adapter 5 to terminate the LIOB-Connect bus                                |
| LPOW-2415A   | LIOB-Connect power supply unit, 24 VDC, 15 W                                     |
| L-TEMP2      | External temperature sensor (NTC10K) for use with L-IOB Universal Inputs         |


## LIOB-FT I/O Module

# LIOB-150/151/152/153/154 V2

Datasheet #89019919

BACnet  
✓ CEA-709  
KNX

Modbus  
M-Bus  
OPC




The LIOB-15x Modules are LonMark certified and communicate over TP/FT-10 in the LonMark System. They provide up to 512 address table entries (ECS mode) which eliminates all binding restrictions.

### LIOB-FT mode

The LIOB-15x Modules can be switched to LIOB-FT mode using manual local operation. In LIOB-FT mode, the LIOB-15x Modules extend L-INX Automation Servers and L-ROC Room Controllers with physical inputs and outputs via plug and play.

### Local Operation and override

All L-IOB I/O Modules are equipped with an LCD display (128x64) with backlight and jog dial for manual local operation. Device and data point information is displayed in text form and via graphical symbols.

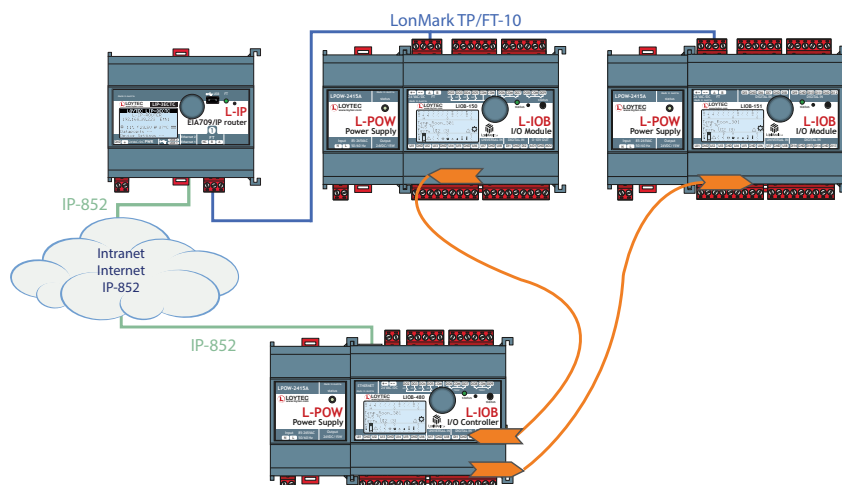

## Features

- I/O module with physical inputs and outputs
- SNVT-based interface for integration on the LonMark TP/FT-10 channel
- LonMark certified
- Manual operation using the jog dial
- 128x64 graphic display with backlight
- Local access to information about device status and data points in clear text and symbols
- Compliant with CEA-709 and ISO/IEC 14908-2 standard (LonMark System)
- Connected to the L-INX Automation Server or L-ROC Room Controller via LIOB-FT
- Automatic integration into device configurations with L-INX and L-ROC
- Easy device replacement without any additional software at the L-INX and L-ROC
- LNS plug-in for device configuration in the LonMark System



## LIOB-150/151/152/153/154 V2

## General Specifications

|                      |                                                                                                                                                    |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimensions (mm)      | 107 x 100 x 75 (L x W x H), DIM015, DIM016, DIM017                                                                                                 |
| Installation         | DIN rail mounting following DIN 43880, top hat rail EN 50022                                                                                       |
| Operating conditions | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals)                                                          |
| Power supply         | 24 VDC / 24 VAC $\pm$ 10 % via L-INX, L-ROC, or L-POW, or with LIOB-Connect, or via connecting an external power supply to the upper left terminal |
| Interface            | 1 x LonMark TP/FT-10 or LIOB-FT                                                                                                                    |

## Specifications LIOB-FT I/O Module (LIOB-15x)

| Type                         | LIOB-150                                                                                                                                         | LIOB-151 | LIOB-152                   | LIOB-153                             | LIOB-154                              |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------------------------|--------------------------------------|---------------------------------------|
| Power consumption            | 1.7 W<br>2.6 W (Relays on)                                                                                                                       | 1.7 W    | 1.7 W<br>2.7 W (Relays on) | 1.7 W<br>2.5 W (Relays on)           | 1.7 W<br>2.6 W (Relays on)            |
| Universal Input (UI)         | 8                                                                                                                                                | 8        | 6                          | 6                                    | 7                                     |
| Digital Input (DI)           | 2                                                                                                                                                | 12       | -                          | -                                    | -                                     |
| Analog Output (AO)           | 2                                                                                                                                                | -        | 6                          | 6                                    | 4                                     |
| Digital Output (DO)          | 8 (4 x Relay 6 A,<br>4 x Triac 0.5 A)                                                                                                            | -        | 8 (8 x Relay 6 A)          | 5 (4 x Relay 16 A,<br>1 x Relay 6 A) | 7 (5 x Relay 6 A,<br>2 x Triac 0.5 A) |
| Digital Output specification | Please refer to the <a href="#">"General Input and Output Specification of LOYTEC devices"</a> at the end of the L-IOB section for more details. |          |                            |                                      |                                       |
| Differential Pressure Sensor | -                                                                                                                                                | -        | -                          | -                                    | 0–500 Pa                              |

## Resource limits

|                         |                           |
|-------------------------|---------------------------|
| Network variables (NVs) | Fixed static NV interface |
| Address table entries   | 512 (non-ECS mode: 15)    |

| Order number | Product description                                                                      |
|--------------|------------------------------------------------------------------------------------------|
| LIOB-150     | LIOB-FT I/O Module: 8 UI, 2 DI, 2 AO, 8 DO (4 x Relay 6 A, 4 x Triac 0.5 A)              |
| LIOB-151     | LIOB-FT I/O Module: 8 UI, 12 DI                                                          |
| LIOB-152     | LIOB-FT I/O Module: 6 UI, 6 AO, 8 DO (8 x Relay 6 A)                                     |
| LIOB-153     | LIOB-FT I/O Module: 6 UI, 6 AO, 5 DO (4 x Relay 16 A, 1 x Relay 6 A)                     |
| LIOB-154     | LIOB-FT I/O Module: 7 UI, 4 AO, 7 DO (5 x Relay 6 A, 2 x Triac 0.5 A), 1 Pressure Sensor |
| LPOW-2415A   | LIOB-Connect power supply unit, 24 VDC, 15 W                                             |
| LPOW-2415B   | Power supply unit with power connector 24 VDC, 15 W                                      |
| L-TEMP2      | External temperature sensor (NTC10K) for use with L-IOB Universal Inputs                 |



The LIOB-45x Modules are LonMark certified and communicate over Ethernet/IP-852 in the LonMark System. They provide up to 512 address table entries (ECS mode) which eliminates all binding restrictions.

### LonMark IP-852 Channel over Ethernet

The LIOB-45x I/O Modules are equipped with two Ethernet ports including a built-in Ethernet switch. This allows for building a daisy chained line topology of up to 20 devices, which reduces costs for network installation. Dual Ethernet port devices also allow the setup of a redundant Ethernet installation (ring topology), which increases reliability. The redundant Ethernet topology is enabled by the Rapid Spanning Tree Protocol (RSTP), which is supported by most managed switches.

The LIOB-45x Modules are equipped with a web interface to query the device status. The local display can be accessed via VNC.


### LIOB-IP mode

The LIOB-45x Modules can be switched to LIOB-IP mode using manual local operation. In LIOB-IP mode, the LIOB-45x Modules extend L-INX Automation Servers, LIOB-48x I/O Controllers, and L-ROC Room Controllers with physical inputs and outputs via plug and play.

### Local Operation and override

All L-IOB I/O Modules are equipped with an LCD display (128x64) with backlight and jog dial for manual local operation. Device and data point information is displayed in text form and via graphical symbols.


L-INX I/O integration  
through LIOB-IP via plug and play

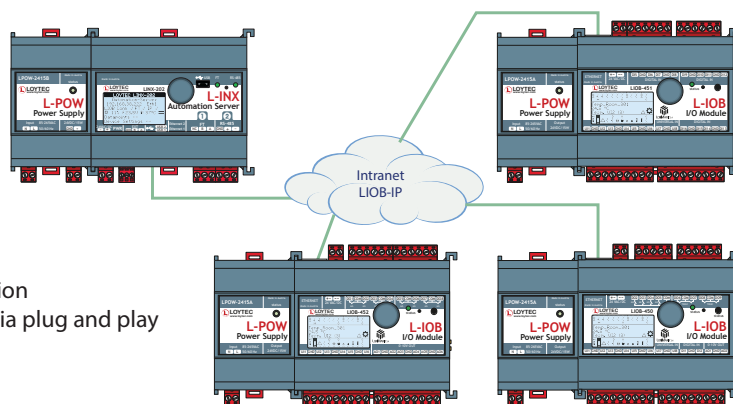

### Features

- I/O module with physical inputs and outputs
- Ethernet/IP network interface
- SNVT-based interface for integration in the LonMark IP-852 channel
- LonMark certified
- Up to 512 address table entries (ECS mode)
- Manual operation using the jog dial or VNC client
- 128x64 graphic display with backlight
- Local access to information about device status and data points in clear text and symbols
- Connected to the L-INX Automation Server, L-ROC Room Controller, and LIOB-48x I/O Controller via LIOB-IP
- Automatic integration into device configurations with L-INX, L-ROC, and LIOB-48x I/O Controller
- Easy device replacement without any additional software at the L-INX, L-ROC, and LIOB-48x I/O Controller
- Integrated web server for device configuration
- LNS plug-in for device configuration in the LonMark System

## LIOB-450/451/452/453/454 V2

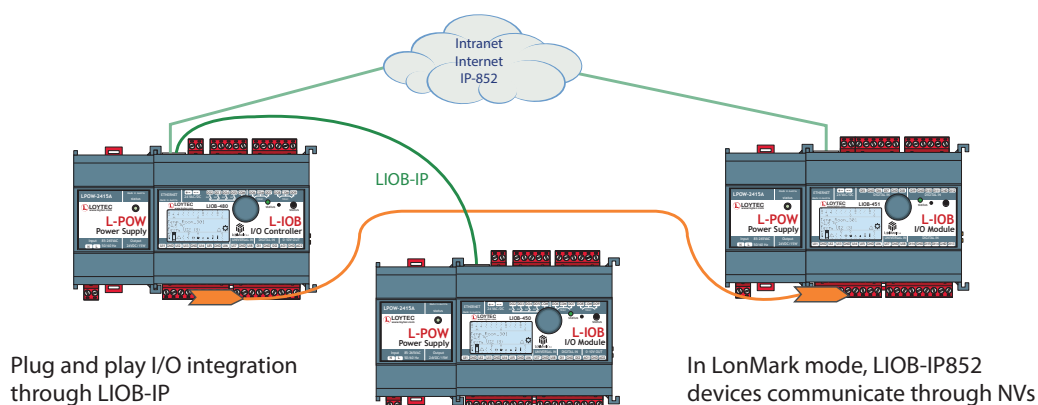

## General Specifications

|                      |                                                                                                                                                       |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimensions (mm)      | 107 x 100 x 75 (L x W x H), DIM018, DIM019, DIM020, DIM021, DIM022                                                                                    |
| Installation         | DIN rail mounting following DIN 43880, top hat rail EN 50022                                                                                          |
| Operating conditions | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals)                                                             |
| Power supply         | 24 VDC / 24 VAC $\pm 10\%$ via L-INX, L-ROC, or L-POW, or with LIOB-Connect, or via connecting of an external power supply to the upper left terminal |
| Interface            | 2 x Ethernet (100Base-T):<br>LIOB-IP,<br>LonMark IP-852                                                                                               |



## Specifications LIOB-IP852 I/O Module (LIOB-45x)

| Type                         | LIOB-450                                                                                                                                           | LIOB-451 | LIOB-452          | LIOB-453                             | LIOB-454                              |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|----------|-------------------|--------------------------------------|---------------------------------------|
| Power consumption            | 4.5 W (Relays on)                                                                                                                                  | 4.5 W    | 4.5 W (Relays on) | 4.5 W (Relays on)                    | 4.5 W (Relays on)                     |
| Universal Input (UI)         | 8                                                                                                                                                  | 8        | 6                 | 6                                    | 7                                     |
| Digital Input (DI)           | 2                                                                                                                                                  | 12       | -                 | -                                    | -                                     |
| Analog Output (AO)           | 2                                                                                                                                                  | -        | 6                 | 6                                    | 4                                     |
| Digital Output (DO)          | 8 (4 x Relay 6 A,<br>4 x Triac 0.5 A)                                                                                                              | -        | 8 (8 x Relay 6 A) | 5 (4 x Relay 16 A,<br>1 x Relay 6 A) | 7 (5 x Relay 6 A,<br>2 x Triac 0.5 A) |
| Digital Output specification | Please refer to the " <a href="#">General Input and Output Specification of LOYTEC devices</a> " at the end of the L-IOB section for more details. |          |                   |                                      |                                       |
| Differential Pressure Sensor | -                                                                                                                                                  | -        | -                 | -                                    | 0–500 Pa                              |

## Resource limits

|                         |                           |
|-------------------------|---------------------------|
| Network variables (NVs) | Fixed static NV interface |
| Address table entries   | 512 (non-ECS mode: 15)    |

| Order number | Product description                                                                         |
|--------------|---------------------------------------------------------------------------------------------|
| LIOB-450     | LIOB-IP852 I/O Module: 8 UI, 2 DI, 2 AO, 8 DO (4 x Relay 6 A, 4 x Triac 0.5 A)              |
| LIOB-451     | LIOB-IP852 I/O Module: 8 UI, 12 DI                                                          |
| LIOB-452     | LIOB-IP852 I/O Module: 6 UI, 6 AO, 8 DO (8 x Relay 6 A)                                     |
| LIOB-453     | LIOB-IP852 I/O Module: 6 UI, 6 AO, 5 DO (4 x Relay 16 A, 1 x Relay 6 A)                     |
| LIOB-454     | LIOB-IP852 I/O Module: 7 UI, 4 AO, 7 DO (5 x Relay 6 A, 2 x Triac 0.5 A), 1 Pressure Sensor |
| LPOW-2415A   | LIOB-Connect power supply unit, 24 VDC, 15 W                                                |
| LPOW-2415B   | Power supply unit with power connector 24 VDC, 15 W                                         |
| L-TEMP2      | External temperature sensor (NTC10K) for use with L-IOB Universal Inputs                    |

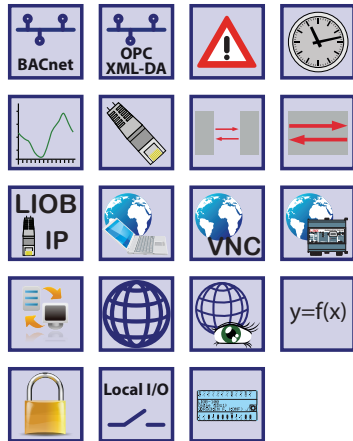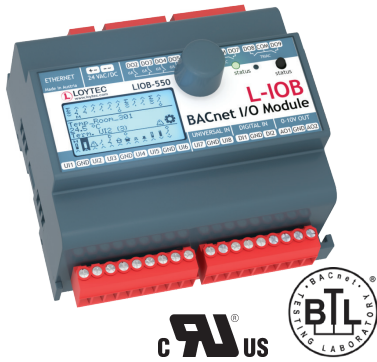

The LIOB-55x Modules communicate over Ethernet/IP in the BACnet/IP network. They adhere to the BACnet Building Controller Profile (B-BC) and either expose their I/O data points through BACnet server objects or actively fetch them from a BACnet server via BACnet client maps.

According to the B-BC profile, the LIOB-55x Modules support BACnet alarming, scheduling, and trending. They are BTL tested and certified.

### BACnet/IP over Ethernet

The LIOB-55x I/O Modules are equipped with two Ethernet ports including a built-in Ethernet switch. This allows for building a daisy chained line topology of up to 20 devices, which reduces costs for network installation. Dual Ethernet port devices also allow the setup of a redundant Ethernet installation (ring topology), which increases reliability. The redundant Ethernet topology is enabled by the Rapid Spanning Tree Protocol (RSTP), which is supported by most managed switches.


The LIOB-55x Modules are equipped with a web interface to query the device status and display or change each data point of the module. In addition to the BACnet object interface, the I/O data points are exposed by the integrated OPC server providing SSL encrypted web services (OPC XML-DA) or UA Secure Conversation (OPC UA). The local display can be accessed via VNC.

### LIOB-IP Mode

The LIOB-55x Modules can be switched to LIOB-IP mode using manual local operation. In LIOB-IP mode, the LIOB-55x Modules extend L-INX Automation Servers, LIOB-58x I/O Controllers, and L-ROC Room Controllers with physical inputs and outputs via plug and play.

### Local Operation and Override

All L-IOB I/O Modules are equipped with an LCD display (128x64) with backlight and jog dial for manual local operation. Device and data point information is displayed in text form and via graphical symbols.

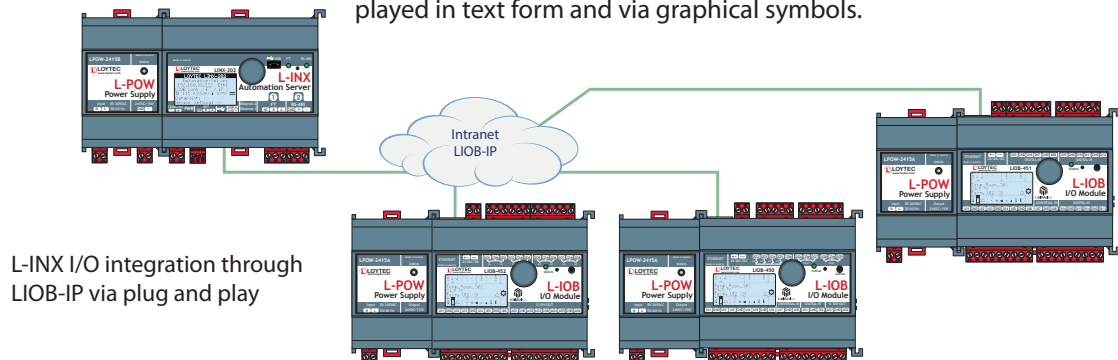


L-INX I/O integration through LIOB-IP via plug and play

### Features

- I/O module with physical inputs and outputs
- Ethernet/IP network interface
- BACnet objects for integration in BACnet/IP channels
- BACnet Client Mappings to access to BACnet/IP objects
- Fulfills the BACnet Building Controller Profile (B-BC)
- Manual operation using the jog dial or VNC client
- 128x64 graphic display with backlight
- Local access to information about device status and data points in clear text and symbols
- Integrated web server for device configuration and monitoring data points
- Compliant with ANSI/ASHRAE 135-2012 and ISO 16484-5:2012 standard
- B-BC (BACnet Building Controller) functionality, BTL certified
- Supports BACnet Alarming, Scheduling, and Trending
- Connected to the L-INX Automation Server, L-ROC Room Controller and LIOB-58x I/O Controller via LIOB-IP
- Automatic integration into device configurations with L-INX, L-ROC, and LIOB-58x I/O Controller
- Easy device replacement without any additional software at the L-INX, L-ROC, and LIOB-58x I/O Controller
- Built-in OPC XML-DA and OPC UA server
- Math objects to execute mathematical operations on data points



## LIOB-550/551/552/553/554 V2

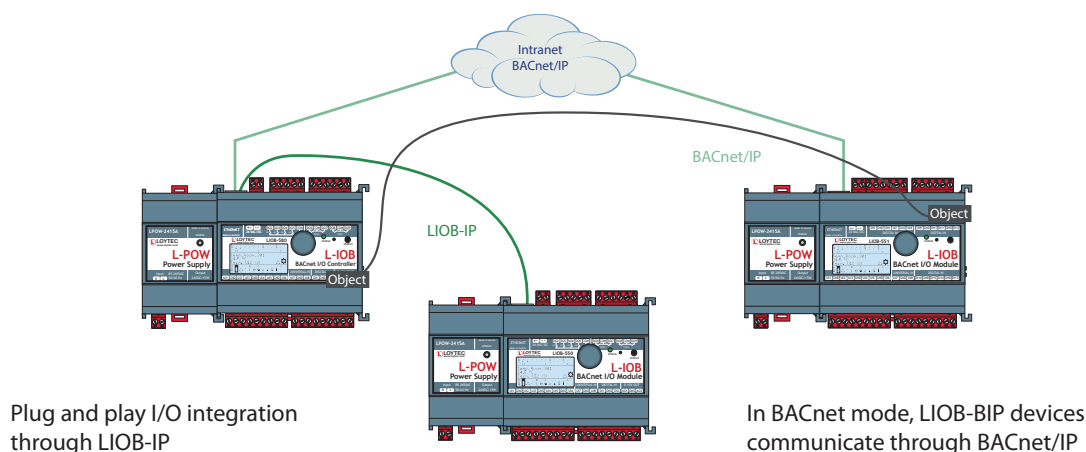

## General Specifications

|                      |                                                                                                                                                       |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimensions (mm)      | 107 x 100 x 75 (L x W x H), DIM018, DIM019, DIM020, DIM021, DIM022                                                                                    |
| Installation         | DIN rail mounting following DIN 43880, top hat rail EN 50022                                                                                          |
| Operating conditions | 0 °C to 50 °C, 10–90 % RH, non condensing, degree of protection: IP40, IP20 (terminals)                                                               |
| Power supply         | 24 VDC / 24 VAC $\pm 10\%$ via L-INX, L-ROC, or L-POW, or with LIOB-Connect, or via connecting of an external power supply to the upper left terminal |
| Interface            | 2 x Ethernet (100Base-T):<br>OPC XML-DA, OPC UA, LIOB-IP, BACnet/IP                                                                                   |

## Specifications LIOB-BIP I/O Module (LIOB-55x)

| Type                         | LIOB-550                                                                                                                                           | LIOB-551 | LIOB-552          | LIOB-553                          | LIOB-554                           |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|----------|-------------------|-----------------------------------|------------------------------------|
| Power consumption            | 4.5 W (Relays on)                                                                                                                                  | 4.5 W    | 4.5 W (Relays on) | 4.5 W (Relays on)                 | 4.5 W (Relays on)                  |
| Universal Input (UI)         | 8                                                                                                                                                  | 8        | 6                 | 6                                 | 7                                  |
| Digital Input (DI)           | 2                                                                                                                                                  | 12       | -                 | -                                 | -                                  |
| Analog Output (AO)           | 2                                                                                                                                                  | -        | 6                 | 6                                 | 4                                  |
| Digital Output (DO)          | 8 (4 x Relay 6 A, 4 x Triac 0.5 A)                                                                                                                 | -        | 8 (8 x Relay 6 A) | 5 (4 x Relay 16 A, 1 x Relay 6 A) | 7 (5 x Relay 6 A, 2 x Triac 0.5 A) |
| Digital Output specification | Please refer to the " <a href="#">General Input and Output Specification of LOYTEC devices</a> " at the end of the L-IOB section for more details. |          |                   |                                   |                                    |
| Differential Pressure Sensor | -                                                                                                                                                  | -        | -                 | -                                 | 0–500 Pa                           |

## Resource limits

|                          |           |                                |                                      |
|--------------------------|-----------|--------------------------------|--------------------------------------|
| OPC data points          | 100       | BACnet notification classes    | 32                                   |
| BACnet objects           | 1 per I/O | Trend logs (BACnet or generic) | 10 (130 000 entries, $\approx 2$ MB) |
| BACnet client mappings   | 20        | Total trended data points      | 10                                   |
| BACnet calendar objects  | 10        | Alarm logs                     | 5                                    |
| BACnet scheduler objects | 5         | Connections (Local / Global)   | 200 / 100                            |
| Math objects             | 20        |                                |                                      |

## Order number Product description


|            |                                                                                           |
|------------|-------------------------------------------------------------------------------------------|
| LIOB-550   | LIOB-BIP I/O Module: 8 UI, 2 DI, 2 AO, 8 DO (4 x Relay 6 A, 4 x Triac 0.5 A)              |
| LIOB-551   | LIOB-BIP I/O Module: 8 UI, 12 DI                                                          |
| LIOB-552   | LIOB-BIP I/O Module: 6 UI, 6 AO, 8 DO (8 x Relay 6 A)                                     |
| LIOB-553   | LIOB-BIP I/O Module: 6 UI, 6 AO, 5 DO (4 x Relay 16 A, 1 x Relay 6 A)                     |
| LIOB-554   | LIOB-BIP I/O Module: 7 UI, 4 AO, 7 DO (5 x Relay 6 A, 2 x Triac 0.5 A), 1 Pressure Sensor |
| LPOW-2415A | LIOB-Connect power supply unit, 24 VDC, 15 W                                              |
| LPOW-2415B | Power supply unit with power connector 24 VDC, 15 W                                       |
| L-TEMP2    | External temperature sensor (NTC10K) for use with L-IOB Universal Inputs                  |


# L-IOB I/O Controller with Application Program

The product family of L-IOB I/O Controllers with application program consists of I/O Controllers with specifically programmed application programs for building automation. Ready-made software modules and integrated hardware components facilitate engineering through a simple configuration and parameterization instead of programming.

The entire project is configured within the IEC 61499 based automation software L-STUDIO and can be seamlessly integrated in an L-ROC room automation system.

## LIOB-AIR – Variable Air Volume Controller (VAV-Controller)

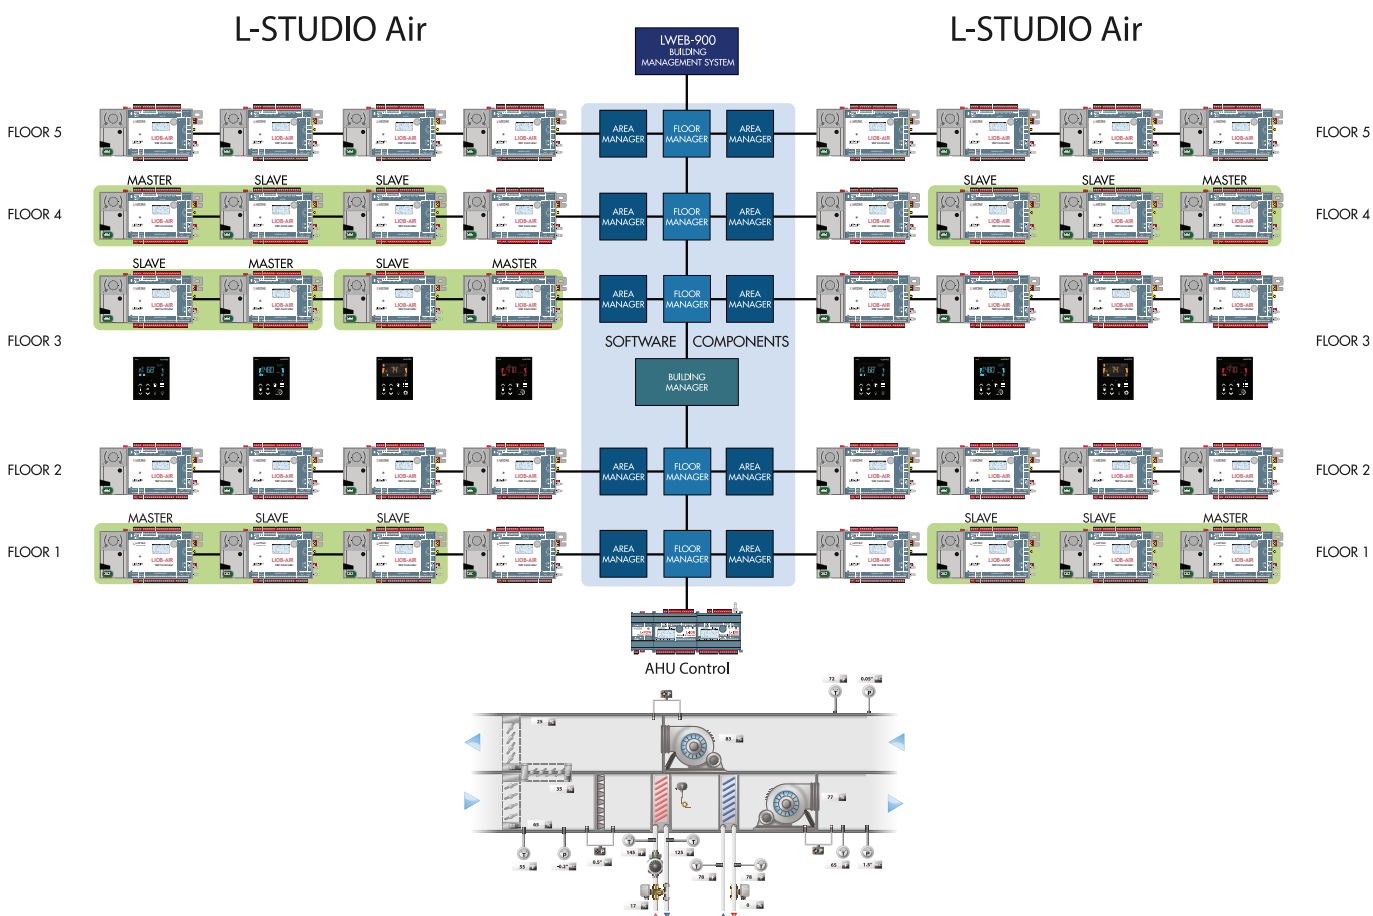

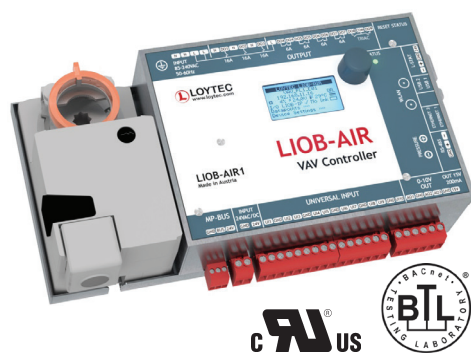

LIOB-AIR is a fully IP based variable air volume controller (VAV controller) with a predefined, flexible, reprogrammable application program and sophisticated management functions for a building ventilation system.

The L-STUDIO AIR designer supports fast and flexible project design meeting any VAV system requirements. Each VAV controller has a BACnet and an OPC network interface and integrates seamlessly into every BMS. The graphic pages for operation, supervision, and device configuration are hosted on the LIOB-AIR eliminating the need for a Tridium or whatsoever middleware component. Without any additional effort L-STUDIO AIR seamlessly integrates into the LWEB-900 building management system. Local trending and alarming provide in depth operating conditions to the BMS. Local scheduling allows reliable zone operation even if the network is down. Sophisticated DCV algorithms safe energy and 24/7 online test algorithms ensure proper system operation and detect malfunctioning devices like a blocked damper actuator, a stuck reheat valve, a dead series fan, etc.

Communication can be established via Ethernet or via the optional meshed WLAN. The dual Ethernet interface allows daisy chaining VAV controllers for simple network wiring. The optional built-in WLAN supports diversity antennas for reliable wireless communication in a self-healing meshed network topology. A dedicated port connects the L-STAT thermostat for user interaction tasks. The built-in damper actuator communicates via MP-Bus and provides detailed status information. The built-in differential pressure sensor is used to measure the air flow. A number of universal inputs and analog and digital outputs can be configured to connect additional sensors and actuators.



### Supported VAV types

- Standard VAV (only Air Flow Control without Reheat and without Fan)
- VAV with electric reheat up to 3 stages
- VAV with hot water reheat
- VAV with series fan
- VAV with series fan and electric reheat up to 3 stages
- VAV with series fan and hot water reheat
- VAV with parallel fan and electric reheat up to 3 stages
- VAV with parallel fan and hot water reheat
- all reheats can also have optional peripheral heat

### Supported inputs (sensors)

- pressure (internal)
- space temperature
- space temperature setpoint, absolute setpoint and/or offset
- occupancy sensor
- occupancy override (setback override)
- discharge temperature

- CO<sub>2</sub> or VOC sensor
- relative humidity
- window contact
- damper feedback
- flow setpoint external (European version)

### Supported outputs (actuators)

- damper MP-Bus
- damper modulating
- damper floating
- parallel fan (also EC motors are supported)
- series fan (also EC motors are supported)
- reheat hot water modulating
- reheat hot water floating
- reheat electric modulating
- reheat electric up to 3 stages
- peripheral heat modulating
- peripheral heat floating
- peripheral heat on / off



## LIOB I/O Controller with Application Program

### LIOB-AIR

The LIOB-AIR VAV controller integrates the following applications:

- Flow Control
- Flow Configuration
- Flow Alarms
- Air Flow Calibration
- Space Temperature Control
- Sequence Control
- Space Temperature Alarms
- Space Temperature Setpoint Control
- External Space Temperature Setpoint
- Occupancy Control
- Discharge Temperature Control
- CO<sub>2</sub> or VOC Control
- Humidity control
- External Flow Setpoint Operation
- Data aggregation to the Air Handling Unit
- Group Functions

#### Sequence Control

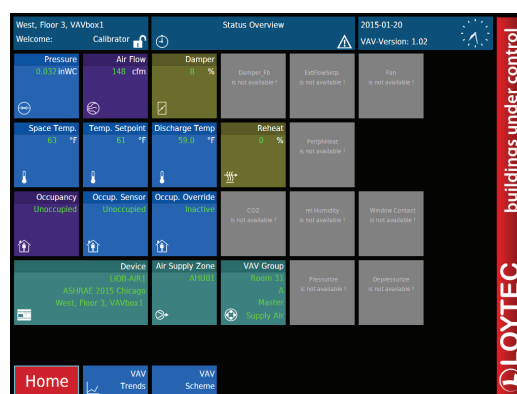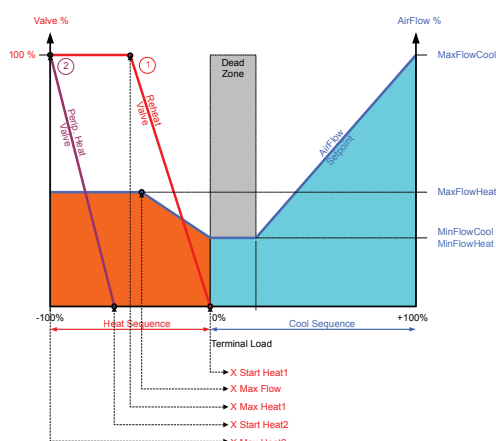

#### Features

- I/O controller with physical inputs and outputs
- Specific application program for variable air volume control
- Networking via redundant IP network
- Alarming, Scheduling, and Trending (AST™)
- Trending of all important data points in the controller
- Configuration and parameterization with L-STUDIO, IEC 61499
- Integration of the L-STAT Network Thermostat
- Integrated LWEB-802/803 room operation
- Integrates seamlessly into the LWEB-900 system
- Dual switched or separated Ethernet ports
- BACnet/IP interface is compliant to the B-BC (BACnet Building Controller) profile
- Integrated OPC XML-DA and OPC UA server
- Manual control using the jog dial
- Remote manual control via VCN client
- 128x64 graphical display with backlight
- Local display of device and data point information as clear text and via symbols
- Simple device replacement without software tool
- Built-in web server for device configuration
- Connection to EnOcean wireless devices via LENO-80x Interface
- Supports WLAN, LIOB-AIR1 and LIOB-AIR13: built-in WLAN, LIOB-AIR2: needs LWLAN-800
- Integration of an actuator via MP-Bus
- Differential pressure sensor
- Damper actuator included

#### L-STUDIO 3.0 licenses

| Type               | LIOB-AIR1                                                                            | LIOB-AIR2                            | LIOB-AIR13                           |
|--------------------|--------------------------------------------------------------------------------------|--------------------------------------|--------------------------------------|
| Programming, Tools | L-STUDIO (based on IEC 61499), VAV application library or IEC 61131 standard library |                                      |                                      |
| License            | L-STUDIO: included<br>L-LOGICAD: n/a                                                 | L-STUDIO: included<br>L-LOGICAD: n/a | L-STUDIO: included<br>L-LOGICAD: n/a |



| Specifications                                                                                                        |                                                                                                                                                                                                                         |                                       |                                                                                                                  |
|-----------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|------------------------------------------------------------------------------------------------------------------|
| Type                                                                                                                  | LIOB-AIR1                                                                                                                                                                                                               | LIOB-AIR2                             | LIOB-AIR13                                                                                                       |
| Dimensions (mm)                                                                                                       | 260 x 120 x 68 (L x W x H), DIM043                                                                                                                                                                                      |                                       | 208 x 120 x 68 (L x W x H), DIM044                                                                               |
| Installation                                                                                                          | mountable on the corresponding volume flow actuator                                                                                                                                                                     |                                       | mountable via oblong holes                                                                                       |
| Operating conditions                                                                                                  | 0 °C to 50 °C, 10–90 % RH, non condensing, degree of protection: IP20                                                                                                                                                   |                                       |                                                                                                                  |
| Power supply                                                                                                          | 85-240 V AC 50/60Hz or<br>24 VDC / 24 V AC ±10 %                                                                                                                                                                        | 24 VDC / 24 V AC ±10 %                |                                                                                                                  |
| Interfaces                                                                                                            | 2 x Ethernet (100Base-T):<br>OPC XML-DA, OPC UA, LonMark IP-852, BACnet/IP, Modbus TCP,<br>LIOB-IP, HTTP, FTP, SSH, HTTPS, Firewall, SNMP, VNC<br>1 x L-STAT (Network Thermostat)<br>1 x MP-Bus (actuator)<br>2 x USB-A |                                       |                                                                                                                  |
|                                                                                                                       | 1 x RS-485 (ANSI TIA/EIA-485):<br>BACnet MS/TP<br>or Modbus RTU (Master or Slave)<br>1 x Internal WLAN (2 x SMA)<br>1 x SMA 50 Ohm, RX Antenna 2.4 GHz<br>1 x SMA 50 Ohm, TX/RX Antenna 2.4 GHz                         | –                                     | 1 x Internal WLAN (2 x SMA)<br>1 x SMA 50 Ohm, RX<br>Antenna 2.4 GHz<br>1 x SMA 50 Ohm, TX/RX<br>Antenna 2.4 GHz |
| Universal Input (UI)                                                                                                  | 10                                                                                                                                                                                                                      | 10                                    | 10                                                                                                               |
| Analog Output (AO)                                                                                                    | 3                                                                                                                                                                                                                       | 3                                     | 3                                                                                                                |
| Digital Output (DO)                                                                                                   | 9 (3 x Relay 16 A, 4 x Relay<br>6 A, 2 x Triac 0.5 A)                                                                                                                                                                   | 6 (4 x Relay 6 A,<br>2 x Triac 0.5 A) | 6 (4 x Relay 6 A, 2 x Triac 0.5 A)                                                                               |
| Digital Output specification                                                                                          | Please refer to the “ <a href="#">General Input and Output Specification of LOYTEC devices</a> ” at the end of the L-IOB section for more details.                                                                      |                                       |                                                                                                                  |
| Differential Pressure Sensor                                                                                          | 0–250 Pa                                                                                                                                                                                                                |                                       |                                                                                                                  |
| Power supply output                                                                                                   | 15 VDC, max. 200 mA                                                                                                                                                                                                     |                                       |                                                                                                                  |
| Frequency                                                                                                             | 2400 ~ 2497 MHz                                                                                                                                                                                                         | -                                     | 2400 ~ 2497 MHz                                                                                                  |
| RF Output Power                                                                                                       | 18 (±2) dBm                                                                                                                                                                                                             | -                                     | 18 (±2) dBm                                                                                                      |
| Actuator                                                                                                              | Torque rating: 5 N m                                                                                                                                                                                                    |                                       |                                                                                                                  |
| Resource limits                                                                                                       |                                                                                                                                                                                                                         |                                       |                                                                                                                  |
| Total number of data points                                                                                           | 30 000                                                                                                                                                                                                                  | CEA-709 External NVs (polling)        | 2 000                                                                                                            |
| OPC data points                                                                                                       | 10 000                                                                                                                                                                                                                  | CEA-709 address table entries         | 1 000 (non-ECS mode: 15)                                                                                         |
| BACnet objects                                                                                                        | 2 000 (analog, binary, multi-state)                                                                                                                                                                                     | LonMark Calendars                     | 1 (25 calendar patterns)                                                                                         |
| BACnet client mappings                                                                                                | 1 000                                                                                                                                                                                                                   | LonMark Schedulers                    | 100                                                                                                              |
| BACnet calendar objects                                                                                               | 25                                                                                                                                                                                                                      | LonMark Alarm Servers                 | 1                                                                                                                |
| BACnet scheduler objects                                                                                              | 100 (64 data points per object)                                                                                                                                                                                         | E-mail templates                      | 100                                                                                                              |
| BACnet notification classes                                                                                           | 32                                                                                                                                                                                                                      | Math objects                          | 100                                                                                                              |
| Trend logs (BACnet or generic)                                                                                        | 512 (4 000 000 entries, ≈ 60 MB)                                                                                                                                                                                        | Alarm logs                            | 10                                                                                                               |
| Total trended data points                                                                                             | 1 000                                                                                                                                                                                                                   | Connections (Local / Global)          | 4 000 / 250                                                                                                      |
| CEA-709 network variables (NVs)                                                                                       | 2 000                                                                                                                                                                                                                   | Number of L-WEB clients               | 32 (simultaneously)                                                                                              |
| CEA-709 Alias NVs                                                                                                     | 2 000                                                                                                                                                                                                                   |                                       |                                                                                                                  |
| Order number                                                                                                          | Product description                                                                                                                                                                                                     |                                       |                                                                                                                  |
| LIOB-AIR1                                                                                                             | LIOB I/O controller with application program variable air volume control, actuator included                                                                                                                             |                                       |                                                                                                                  |
| LIOB-AIR2                                                                                                             | LIOB I/O controller with application program variable air volume control, actuator included                                                                                                                             |                                       |                                                                                                                  |
| LIOB-AIR13                                                                                                            | LIOB I/O controller with application program variable air volume control, actuator included                                                                                                                             |                                       |                                                                                                                  |
| LIOB-AIR-START-M                                                                                                      | Starter kit: 2 x LIOB-AIRx, 3 x L-STUDIO software license                                                                                                                                                               |                                       |                                                                                                                  |
| L-TEMP2                                                                                                               | External temperature sensor (NTC10K) for use with L-IOB Universal Inputs                                                                                                                                                |                                       |                                                                                                                  |
| More product variants are available online under <a href="http://www.loytec.com/liobair">www.loytec.com/liobair</a> . |                                                                                                                                                                                                                         |                                       |                                                                                                                  |

## Actuator


# L-ACT101-MP, L-ACT102-MP

Datasheet #89033119



✓ BACnet  
 ✓ CEA-709  
 KNX

✓ Modbus  
 ✓ MP-Bus  
 ✓ OPC

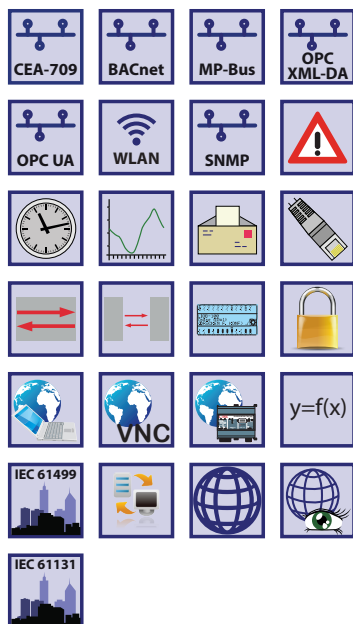

L-ROB-AIR is a fully IP based variable air volume controller (VAV controller) with a predefined, flexible, reprogrammable application program and sophisticated management functions for a building ventilation system.

The L-STUDIO AIR designer supports fast and flexible project design meeting any VAV system requirements. Each VAV controller has a BACnet and an OPC network interface and integrates seamlessly into every BMS. The graphic pages for operation, supervision, and device configuration are hosted on the L-ROB-AIR eliminating the need for a Tridium or whatsoever middleware component. Without any additional effort L-STUDIO AIR seamlessly integrates into the LWEB-900 building management system. Local trending and alarming provide in depth operating conditions to the BMS. Local scheduling allows reliable zone operation even if the network is down. Sophisticated DCV algorithms save energy and 24/7 online test algorithms ensure proper system operation and detect malfunctioning devices like a blocked damper actuator, a stuck reheat valve, a dead series fan, etc.

Communication can be established via Ethernet or via the optional meshed WLAN. The dual Ethernet interface allows daisy chaining VAV controllers for simple network wiring. The optional built-in WLAN supports diversity antennas for reliable wireless communication in a self-healing meshed network topology. A dedicated port connects the L-STAT thermostat for user interaction tasks. The built-in damper actuator communicates via MP-Bus and provides detailed status information. The built-in differential pressure sensor is used to measure the air flow. A number of universal inputs and analog and digital outputs can be configured to connect additional sensors and actuators.

## L-ACT101-MP, L-ACT102-MP

| Order number | Product description        |
|--------------|----------------------------|
| L-ACT101-MP  | Actuator 5/8", 5Nm, MP-BUS |
| L-ACT102-MP  | Actuator 3/4", 5Nm, MP-BUS |

# General Input and Output Specification of LOYTEC devices

Datasheet #89049119

## UI – Universal Input

UIs are universal inputs for four different input types. They have an input voltage range of 0 V to 10 V, and can withstand up to 30 V. The UIs correspond to class 1 with a relative accuracy of  $\pm 1\%$  (of measured value) between 1 V and 10 V, and an absolute accuracy of  $\pm 10$  mV between 0 V and 1 V. The ADC resolution is 16 bits. Galvanically isolated sensors resp. switches must be connected. Universal inputs can be configured as:

- **Binary Input (Digital Input)**

Input impedance  $> 20\text{ k}\Omega$ , sampling period 10 ms.

- In voltage mode, the threshold values are  $< 0.8\text{ V}$  for low level and  $> 2\text{ V}$  for high level.
- In resistance mode, the threshold values are  $< 1.9\text{ k}\Omega$  for low level and  $> 6.7\text{ k}\Omega$  for high level.

Between the threshold values, the resulting level of the UI is not defined.

- **Voltage Metering 0-10 V**

Input Impedance  $> 20\text{ k}\Omega$ , sampling period  $< 1\text{ s}$ .

- **Current loop 4-20 mA**

Input Impedance  $> 20\text{ k}\Omega$ , sampling period  $< 1\text{ s}$ . An internal shunt of  $249\text{ }\Omega$  is available for some universal inputs. Otherwise, an external resistor of  $249\text{ }\Omega$  must be used as a shunt.

- **Resistance Measurement**

Input Impedance  $10\text{ k}\Omega$ , sampling period  $< 1\text{ s}$ . Resistors in the range of  $1\text{ k}\Omega$  to  $100\text{ k}\Omega$  can be measured. For popular temperature sensors (e.g. Pt1000, NTC10K, NTC1K8, Ni1000) fixed internal translation tables are provided. For all other temperature sensors, translation tables can be defined in the configuration tool and used on the device.

The average sampling period  $p$  of analog inputs depends on the number of active (non-disabled) universal inputs  $n$  that are configured in analog mode. The formula for  $p$  is:

$$p = n \cdot 125\text{ ms}$$

This means if e.g. only two UIs are configured as analog inputs, a new sample is taken every 250 ms (on average) for each of the two inputs. The UIs configured as digital inputs are unaffected (sampling period always 10 ms) by this formula.

## DI – Digital Input, Counter Input (S0-Pulse)

DIs are fast binary inputs, which can also be used as counter inputs (S0). They follow the S0 specification for electric meters and have a sampling rate of 10 ms. They change state at a load of  $195\text{ }\Omega$  between the DI terminal and GND. Galvanically isolated sensors resp. switches must be connected.

## AO – Analog Output

AOs are analog outputs with a signal range of 0 to 10 V (up to 12 V), a resolution of 10 bits, and a maximum output current of 10 mA (20 mA @ 12 V), short circuit proof (2 outputs at a time). The accuracy over the whole range is  $\pm 100\text{ mV}$ .

## DO – Digital Output

The following digital outputs are available:

- Relay 6 A Output: Switching capacity 6 A, 250 VAC resp. 30 VDC. Max in-rush current 6 A, max. 600 W (resistive) @ 250 VAC.
- Relay 10 A Output: Switching capacity 10 A, 250 VAC resp. 30 VDC. Max in-rush current 10 A, max. 1600 W (resistive) @ 250 VAC.
- Relay 16 A Output: Switching capacity 16 A, 250 VAC resp. 30 VDC. Max in-rush current 80 A, max. 2000 W (resistive) @ 250 VAC.
- TRIAC Output: Switching capacity 0.5 A, 24 to 230 VAC. External relays must not be connected.

When switching higher loads than specified an interface relay must be used. A quenching circuit like a varistor or RC element must be used at the respective output of the LOYTEC device.

## PRESS – Pressure Sensor

These inputs represent differential pressure sensors. They are equipped with two  $3/16''$  (4.8 mm) hose connectors.



A low-angle, perspective view of the Golden Gate Bridge, showing its iconic red-orange steel structure. The bridge's main tower is prominent on the right, with numerous suspension cables fanning out to support the deck. The bridge spans a body of water with visible whitecaps. In the background, the Marin Headlands and distant hills are visible under a clear blue sky with some light clouds.

# Gateways



## Gateways

### L-GATE, L-INX, L-DALI



L-GATE Gateways are conceived as universal gateways to map and connect data points from different communication technologies. This mapping and connecting is summarized with the term "Connections". The configuration tool can create such connections either manually or automatically by using Smart Auto-Connect™. Local and Global Connections are distinguished. Local Connections allow connections between data points from different communication technologies located on the very same device. A Global Connection provides similar functions as a Local Connection, but can span across an IP network between two or more LOYTEC devices. A Global Connection establishes a data cloud defining a system wide name. Data points that are members of this data cloud get their input values automatically updated or can send their output values for the other cloud members to update their data point values.

The L-INX Automation Servers support the same gateway functionalities as described for the L-GATE products. Specifically the LINX-102/103 and LINX-202/203 Automation Servers can be used as very cost effective gateway solutions. The LINX-102/103 supports connectivity to LonMark Systems, Modbus, M-Bus, MP-Bus and OPC XML-DA. The LINX-202/203 supports connectivity to BACnet, Modbus, M-Bus, MP-Bus and OPC XML-DA. In addition, the L-INX Automation Servers can integrate physical I/Os through L-IOB I/O Modules. These I/O data points can also be utilized in the gateway connections.

The L-INX Automation Servers and L-GATE Gateways are configured with the very same configuration tool. Therefore the work flows are identical. LOYTEC's L-INX and L-GATE product offering provides a wide spectrum of gateway solutions for our customers to benefit from the variety and flexibility when picking the most suitable model.



Also the L-DALI Lighting Controllers offer gateway functionality to integrate DALI lighting control systems into LonMark Systems or BACnet networks.

| Features                              | LGATE-952 | LGATE-902 | LINX-102 | LINX-103 | LINX-202 | LINX-203 |
|---------------------------------------|-----------|-----------|----------|----------|----------|----------|
| LON IP-852 – TP/FT-10                 | X         | X         | X        | X        |          |          |
| BACnet/IP – MS/TP                     | X         | X         |          |          | X        | X        |
| KNXnet/IP – KNX TP1                   | X         | X         | X        | X        | X        | X        |
| EnOcean                               | X         | X         | X        | X        | X        | X        |
| SMI                                   | X         | X         | X        | X        | X        | X        |
| Modbus TCP – Modbus RTU               | X         | X         | X        | X        | X        | X        |
| M-Bus                                 | X         | X         | X        | X        | X        | X        |
| MP-Bus                                | X         | X         | X        | X        | X        | X        |
| OPC XML-DA, OPC UA Server             | X         | X         | X        | X        | X        | X        |
| Dual Ethernet (switched or separated) | X         | X         | X        | X        | X        | X        |
| WLAN                                  | X         | X         | X        | X        | X        | X        |
| IP-852 Router                         |           |           |          | X        |          |          |
| BACnet Router                         |           |           |          |          |          | X        |
| LON Remote Network Interface          | X         | X         | X        |          |          |          |
| Support of L-IOB I/O Modules          |           |           | X        | X        | X        | X        |
| L-WEB Visualization                   | X         | X         | X        | X        | X        | X        |

- ✓ BACnet
- ✓ CEA-709
- ✓ KNX

- ✓ Modbus
- ✓ M-Bus
- ✓ OPC

Datasheet #89023319

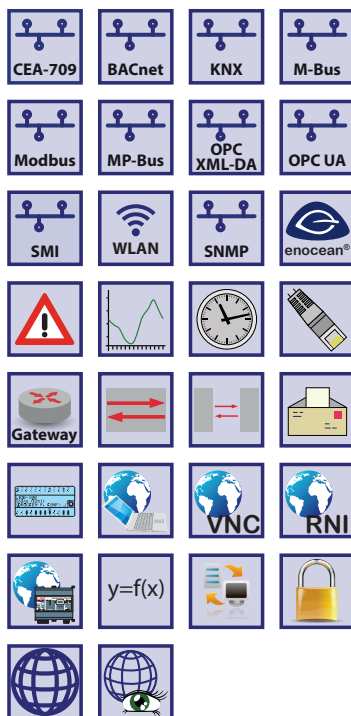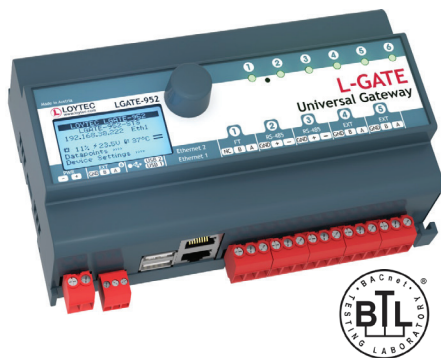

The L-GATE Gateway LGATE-952 are powerful universal gateways that can host user specific graphical pages to be used with LWEB-802/803. They can simultaneously integrate and map data points from multiple open protocols. Local operation and override is provided by the built-in jog dial and the backlit display (128x64 pixels). Device and data point information is provided by the web interface and shown on the display via symbols and in text format.

The powerful universal gateways provide connectivity functions to concurrently integrate CEA-709 (LonMark Systems), BACnet, KNX, Modbus, and M-Bus subsystems. LonMark Systems can be integrated via IP-852 (Ethernet/IP) or TP/FT-10. BACnet integration is supported through BACnet/IP (Ethernet/IP) or BACnet MS/TP (RS-485). LGATE-952 feature an integrated Remote Network Interface (RNI) to access the TP/FT-10 channel on the device via Ethernet/IP. LGATE devices implement the BACnet Building Controller (B-BC) profile, can be configured to be a BBMD and are BTL certified. In addition, the universal gateways provide connectivity to KNXnet/IP and Modbus TCP via Ethernet/IP and to Modbus RTU via RS-485. M-Bus and KNX TP1 device integration needs optional interface modules.

The gateway functionality allows data communication between all communication technologies available on the device. Different technology data points are mapped through Local Connections on the device. The mapping of different technology data points on distributed devices is supported by Global Connections. The universal gateways LGATE-952 also support Smart Auto-Connect™ – the automatic generation of connections to substantially reduce engineering efforts and cost. Optionally, mathematical objects can be applied within a connection to calculate the data point output values depending on the formula used. All technology data points are automatically created as OPC XML-DA and OPC UA data points.

Each LGATE-952 is equipped with two Ethernet ports. It can either be configured to use the internal switch to interconnect the two ports or every port is configured to work in a separate IP network.


When the Ethernet ports are configured for two separate IP networks, one port can be connected for instance to a WAN (Wide Area Network) with enabled network security (HTTPS) while the second port can be configured to be connected to an insecure network (LAN) where the standard building automation protocols like BACnet/IP, LON/IP, or Modbus TCP are present. These devices also feature firewall functionality of course to isolate particular protocols or services between the ports.

Using the internal switch, a daisy chained line topology of up to 20 devices can be built, which reduces costs for network installation. The IP switch also allows the setup of a redundant Ethernet installation (ring topology), which increases reliability. The redundant Ethernet topology is enabled by the Rapid Spanning Tree Protocol (RSTP), which is supported by most managed switches.

The L-GATE devices provide fully featured AST™ functionality (Alarming, Scheduling, and Trending) and can be integrated perfectly into the L-WEB System.

## L-GATE Gateway

# LGATE-952

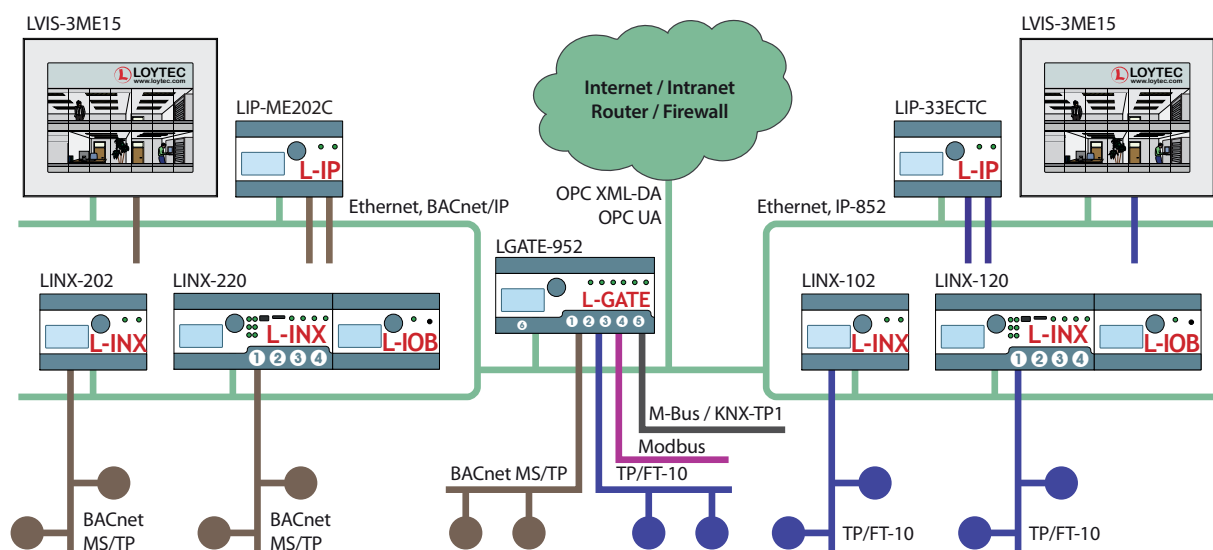

### Features

- Universal gateway
- Compliant with ANSI/ASHRAE 135-2012 and ISO 16484-5:2012 standard
- B-BC (BACnet Building Controller) functionality
- Supports BBMD (BACnet Broadcast Management Device)
- Supports BACnet MS/TP or BACnet/IP
- BACnet Client Function (Write Property, Read Property, COV Subscription)
- BACnet Client Configuration with configuration tool (scan and EDE import)
- Compliant with CEA-709, CEA-852, and ISO/IEC 14908 Standard (LonMark System)
- Supports TP/FT-10 or IP-852 (Ethernet/IP)
- Support of dynamically created or static NVs
- Support of CEA-709 user-defined NVs (UNVTs) and Configuration Properties (SCPTs, UCPTs)
- Remote Network Interface (RNI) with 2 MNI devices
- Support of KNX/IP directly, KNX TP1 via LKNX-300 Interface
- M-Bus Master according to EN 13757-3, connection via optional M-Bus Converter (L-MBUS20 or L-MBUS80)
- Modbus TCP and Modbus RTU (Master or Slave)
- Automatic creation of Local Connections (Smart Auto-Connect™)
- Math objects to execute mathematical operations on data points
- Automatic mapping of network variables to BACnet objects in accordance with CEN/TS 15231:2005
- Alarming, Scheduling, and Trending (AST™)
- Event-driven e-mail notification
- Stores customized graphical pages
- Visualization of customized graphical pages through LWEB-900 and LWEB-802/803
- Built-in OPC XML-DA and OPC UA server
- Dual switched or separated Ethernet ports
- Access to network statistics
- Integrated web server for device configuration and monitoring data points
- Manual operation using the jog dial or VNC client
- Local and remote access to information about device status and data points
- 128x64 graphic display with backlight
- Configurable via Ethernet/IP or TP/FT-10
- Connection to EnOcean wireless devices via LENO-80x Interface
- Supports SMI (Standard Motor Interface) through LSMI-80x
- Supports WLAN through LWLAN-800 Interface
- Supports MP-BUS through LMPBUS-804 Interface
- Stores user-defined project documentation

### Specifications

| Type                 | LGATE-952                                                                                 |
|----------------------|-------------------------------------------------------------------------------------------|
| Dimensions (mm)      | 159 x 100 x 75 (L x W x H), DIM053                                                        |
| Installation         | DIN rail mounting following DIN 43880, top hat rail EN 50022                              |
| Power supply         | 24 VDC / 24 VAC ±10 %, typ. 2.5 W                                                         |
| Operating conditions | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals) |



## Specifications

| Type       | LGATE-952                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Interfaces | 2 x Ethernet (100Base-T):<br>OPC XML-DA, OPC UA, LonMark IP-852*, BACnet/IP**, KNXnet/IP, Modbus TCP (Master or Slave), HTTP, FTP, SSH, HTTPS, Firewall, VNC, SNMP<br>1 x TP/FT-10* (LonMark System)<br>2 x USB-A: WLAN (needs LWLAN-800), EnOcean (needs LENO-80x), SMI (needs LSMI-804), MP-Bus (needs LMPBUS-804)<br>2 x RS-485 (ANSI TIA/EIA-485):<br>BACnet MS/TP** or<br>Modbus RTU (Master or Slave)<br>3 x EXT:<br>M-Bus, Master EN 13757-3 (needs L-MBUS20/80)<br>or<br>KNX TP1 (needs LKNX-300)<br>or<br>SMI (needs LSMI-800) |
|            | * Either LonMark IP-852 or TP/FT-10 (no router)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|            | ** Either BACnet/IP or BACnet MS/TP (no router)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

|                          |                          |
|--------------------------|--------------------------|
| Tools                    | L-INX Configurator       |
| Remote Network Interface | 1 RNI with 2 MNI devices |

## Resource limits

|                                 |                                     |                              |                   |
|---------------------------------|-------------------------------------|------------------------------|-------------------|
| Total number of data points     | 30 000                              | LonMark Schedulers           | 100               |
| OPC data points                 | 5 000                               | LonMark Alarm Servers        | 1                 |
| BACnet objects                  | 1 000 (analog, binary, multi-state) | E-mail templates             | 100               |
| BACnet client mappings          | 1 000                               | Math objects                 | 100               |
| BACnet calendar objects         | 25                                  | Alarm logs                   | 10                |
| BACnet scheduler objects        | 100 (64 data points per object)     | M-Bus data points            | 1 000             |
| BACnet notification classes     | 32                                  | Modbus data points           | 2 000             |
| Trend logs (BACnet or generic)  | 512 (4 000 000 entries, ≈ 60 MB)    | KNX TP1 data points          | 1 000             |
| Total trended data points       | 1 000                               | KNXnet/IP data points        | 1 000             |
| CEA-709 network variables (NVs) | 2 000                               | Connections (Local / Global) | 2 000 / 250       |
| CEA-709 Alias NVs               | 2 000                               | Number of L-WEB clients      | 32 (gleichzeitig) |
| CEA-709 External NVs (polling)  | 2 000                               | Number of EnOcean devices    | 100               |
| CEA-709 address table entries   | 1 000 (non-ECS mode: 15)            | EnOcean data points          | 1 000             |
| LonMark Calendars               | 1 (25 calendar patterns)            | SMI devices (per channel)    | 16                |



| Order number | Product description                                            |
|--------------|----------------------------------------------------------------|
| LGATE-952    | Universal Gateway                                              |
| LPOW-2415A   | LIOB-Connect power supply unit, 24 VDC, 15 W                   |
| LPOW-2415B   | Power supply unit with power connector 24 VDC, 15 W            |
| L-MBUS20     | M-Bus level converter for 20 M-Bus devices                     |
| L-MBUS80     | M-Bus level converter for 80 M-Bus devices                     |
| LKNX-300     | KNX interface to connect KNX TP1 devices                       |
| LENO-800     | EnOcean Interface 868 MHz Europe                               |
| LENO-801     | EnOcean Interface 902 MHz USA/Canada                           |
| LENO-802     | EnOcean Interface 928 MHz Japan                                |
| LWLAN-800    | Wireless LAN Interface IEEE 802.11bgn                          |
| LMPBUS-804   | MP-Bus interface for 16 devices per channel, up to 4 channels  |
| LSMI-800     | Standard Motor Interface for 16 motors via EXT port            |
| LSMI-804     | Standard Motor Interface for 64 motors, 4 SMI channels via USB |

## L-GATE Gateway

# LGATE-902

Datasheet #89035819

- ✓ BACnet
- ✓ CEA-709
- ✓ KNX
- ✓ Modbus
- ✓ M-Bus
- ✓ OPC

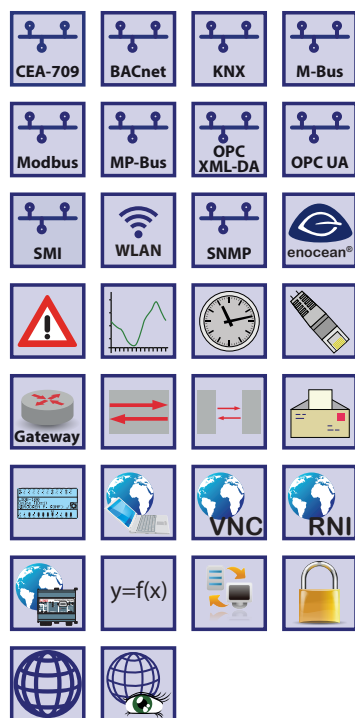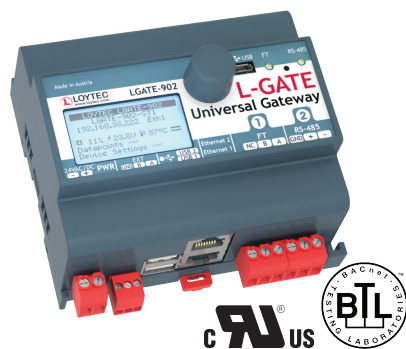

The LGATE-902 Gateway is a powerful gateway that can host user specific graphical pages. The gateways provide connectivity functions to concurrently integrate CEA-709 (LonMark Systems), BACnet, KNX, Modbus, and M-Bus. Local operation and override is provided by the built-in jog dial and the backlit display (128x64 pixels). Device and data point information is provided by the web interface and shown on the display via symbols and in text format.

LonMark Systems can be integrated via IP-852 (Ethernet/IP) or TP/FT-10. LGATE-902 features an integrated Remote Network Interface (RNI) to access the TP/FT-10 channel on the device via Ethernet/IP. BACnet integration is supported through BACnet/IP (Ethernet/IP) or BACnet MS/TP (RS-485). LGATE-902 ist BACnet Building Controller (B-BC) BTL certified and can be configured to be a BBMD.

In addition, the gateway provides connectivity to KNXnet/IP and Modbus (RTU, TCP, Master or Slave). M-Bus and KNX TP1 device integration needs optional interface modules.


Through the built-in web server, all data points can be monitored and changed. The gateway functionality allows data communication between all communication technologies available on the device. Different technology data points are mapped through Local Connections on the device. The mapping of different technology data points on distributed devices is supported by Global Connections. The gateway also support Smart Auto-Connect™ – the automatic generation of connections to substantially reduce engineering efforts and cost. Math objects allow to execute mathematical operations on data points. All technology data points are automatically created as OPC XML-DA and OPC UA data points.

The LGATE-902 Gateway is equipped with two Ethernet ports. It can either be configured to use the internal switch to interconnect the two ports or every port is configured to work in a separate IP network.

When the Ethernet ports are configured for two separate IP networks, one port can be connected for instance to a WAN (Wide Area Network) with enabled network security (HTTPS) while the second port can be configured to be connected to an insecure network (LAN) where the standard building automation protocols like BACnet/IP, LON/IP, or Modbus TCP are present. These devices also feature fire-wall functionality of course to isolate particular protocols or services between the ports.

Using the internal switch, a daisy chained line topology of up to 20 devices can be built, which reduces costs for network installation. The IP switch also allows the setup of a redundant Ethernet installation (ring topology), which increases reliability. The redundant Ethernet topology is enabled by the Rapid Spanning Tree Protocol (RSTP), which is supported by most managed switches.

The L-GATE devices provide fully featured AST™ functionality (Alarming, Scheduling, and Trending) and can be integrated perfectly into the L-WEB System.

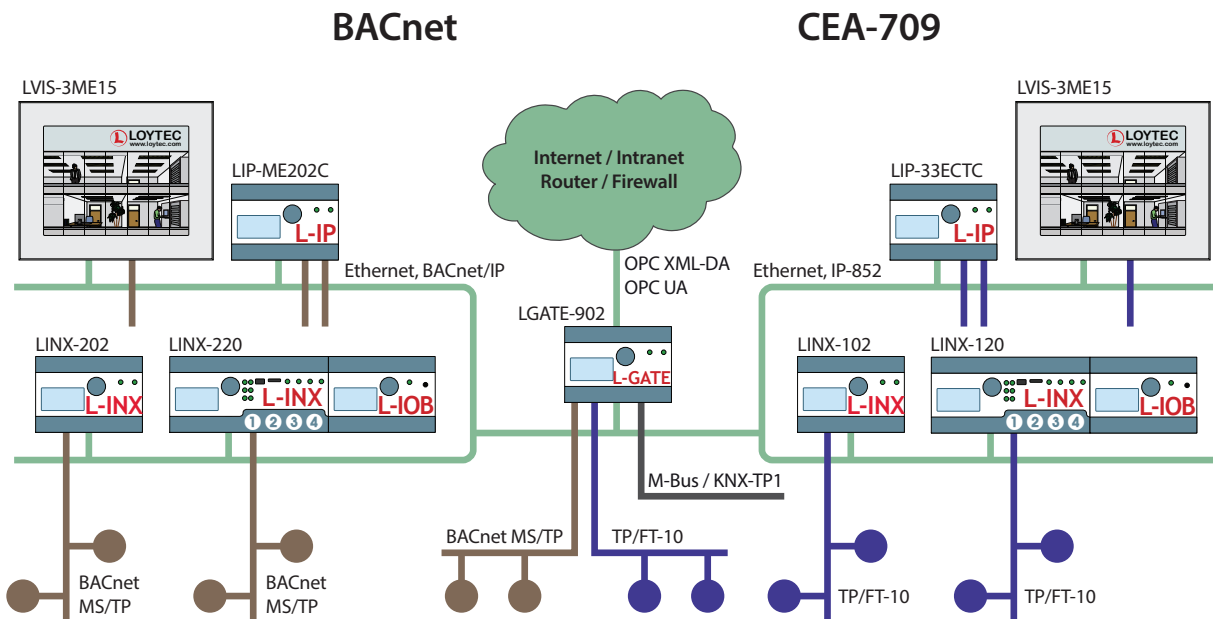


## Features

- Universal Gateway for BACnet, LonMark, KNX, Modbus, M-Bus, and EnOcean
- Compliant with ANSI/ASHRAE 135-2012 and ISO 16484-5:2012 standard
- B-BC (BACnet Building Controller) functionality, BTL certified
- Supports BBMD (BACnet Broadcast Management Device)
- Supports BACnet MS/TP or BACnet/IP
- BACnet Client Function (Write Property, Read Property, COV Subscription)
- BACnet Client Configuration with configuration tool (scan and EDE import)
- Compliant with CEA-709, CEA-852, and ISO/IEC 14908 Standard (LonMark System)
- Supports TP/FT-10 or IP-852 (Ethernet/IP)
- Support of dynamically created or static NVs
- Support of user-defined NVs (UNVTs) and Configuration Properties (SCPTs, UCPTs)
- Remote Network Interface (RNI) with 2 MNI devices
- Direct connection to KNX/IP, KNX TP1 connection via LKNX-300 Interface
- M-Bus Master according to EN 13757-3, connection via M-Bus Level Converter (LMBUS-20 or LMBUS-80)
- Modbus TCP and Modbus RTU (Master or Slave)
- Automatic creation of Local Connections (Smart Auto-Connect™)
- Math objects to execute mathematical operations on data points
- Automatic mapping of network variables to BACnet objects in accordance with CEN/TS 15231:2005
- Alarming, Scheduling, and Trending (AST™)
- Event-driven e-mail notification
- Stores customized graphical pages
- Visualization of customized graphical pages through LWEB-900 and LWEB-802/803
- Built-in OPC XML-DA and OPC UA server
- Dual switched or separated Ethernet ports
- Access to network statistics
- Integrated web server for device configuration and monitoring data points
- Manual operation using the jog dial or VNC client
- Local and remote access to information about device status and data points
- 128x64 graphic display with backlight
- Configurable via Ethernet/IP or TP/FT-10
- Connection to EnOcean wireless devices via LENO-80x Interface
- Supports SMI (Standard Motor Interface) through LSMI-80x
- Supports WLAN through LWLAN-800 Interface
- Supports MP-Bus through LMPBUS-804 Interface
- Stores user-defined project documentation

| Specifications                  |                                                                                                                                                                                                                                                                                                                                                                                               |                              |                     |                                                                                                                                                                                                                                                         |  |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Dimensions (mm)                 | 107 x 100 x 75 (L x W x H), DIM045                                                                                                                                                                                                                                                                                                                                                            |                              |                     |                                                                                                                                                                                                                                                         |  |
| Installation                    | DIN rail mounting following DIN 43880, top hat rail EN 50022                                                                                                                                                                                                                                                                                                                                  |                              |                     |                                                                                                                                                                                                                                                         |  |
| Power supply                    | 12 – 35 VDC / 12 – 24 V AC ±10 %, typ. 2.5 W                                                                                                                                                                                                                                                                                                                                                  |                              |                     |                                                                                                                                                                                                                                                         |  |
| Operating conditions            | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals)                                                                                                                                                                                                                                                                                                     |                              |                     |                                                                                                                                                                                                                                                         |  |
| Interfaces                      | 2 x Ethernet (100Base-T):<br>OPC XML-DA, OPC UA,<br>LonMark IP-852**, BACnet/IP*,<br>KNXnet/IP,<br>Modbus TCP (Master or Slave),<br>HTTP, FTP, SSH, HTTPS,<br>Firewall, VNC, SNMP<br>2 x USB-A:<br>WLAN (needs LWLAN-800),<br>EnOcean (needs LENO-80x)<br>SMI (needs LSMI-804)<br>MP-Bus (needs LMPBUS-804)<br><br>* Either BACnet/IP or BACnet MS/TP<br>** Either LonMark IP-852 or TP/FT-10 |                              |                     | 1 x TP/FT-10** (LonMark system)<br>1 x RS-485 (ANSI TIA/EIA-485):<br>BACnet MS/TP*<br>or<br>Modbus RTU (Master or Slave)<br>1 x EXT:<br>M-Bus, Master EN 13757-3<br>(needs L-MBUS20/80)<br>or<br>KNX TP1 (needs LKNX-300)<br>or<br>SMI (needs LSMI-800) |  |
| Tools                           | L-INX Configurator                                                                                                                                                                                                                                                                                                                                                                            |                              |                     |                                                                                                                                                                                                                                                         |  |
| Remote Network Interface        | 1 RNI with 2 MNI devices                                                                                                                                                                                                                                                                                                                                                                      |                              |                     |                                                                                                                                                                                                                                                         |  |
| Resource limits                 |                                                                                                                                                                                                                                                                                                                                                                                               |                              |                     |                                                                                                                                                                                                                                                         |  |
| Total number of data points     | 10 000                                                                                                                                                                                                                                                                                                                                                                                        | LonMark Schedulers           | 100                 |                                                                                                                                                                                                                                                         |  |
| OPC data points                 | 2 000                                                                                                                                                                                                                                                                                                                                                                                         | LonMark Alarm Servers        | 1                   |                                                                                                                                                                                                                                                         |  |
| BACnet objects                  | 750 (analog, binary, multi-state)                                                                                                                                                                                                                                                                                                                                                             | E-mail templates             | 100                 |                                                                                                                                                                                                                                                         |  |
| BACnet client mappings          | 750                                                                                                                                                                                                                                                                                                                                                                                           | Math objects                 | 100                 |                                                                                                                                                                                                                                                         |  |
| BACnet calendar objects         | 25                                                                                                                                                                                                                                                                                                                                                                                            | Alarm logs                   | 10                  |                                                                                                                                                                                                                                                         |  |
| BACnet scheduler objects        | 100 (64 data points per object)                                                                                                                                                                                                                                                                                                                                                               | M-Bus data points            | 250                 |                                                                                                                                                                                                                                                         |  |
| BACnet notification classes     | 32                                                                                                                                                                                                                                                                                                                                                                                            | Modbus data points           | 250                 |                                                                                                                                                                                                                                                         |  |
| Trendlogs (BACnet or generic)   | 256 (4 000 000 entries, ≈ 60 MB)                                                                                                                                                                                                                                                                                                                                                              | KNX TP1 data points          | 250                 |                                                                                                                                                                                                                                                         |  |
| Total trended data points       | 256                                                                                                                                                                                                                                                                                                                                                                                           | KNXnet/IP data points        | 250                 |                                                                                                                                                                                                                                                         |  |
| CEA-709 network variables (NVs) | 1 000                                                                                                                                                                                                                                                                                                                                                                                         | Connections (Local / Global) | 1 000 / 250         |                                                                                                                                                                                                                                                         |  |
| CEA-709 Alias NVs               | 1 000                                                                                                                                                                                                                                                                                                                                                                                         | Number of L-WEB clients      | 32 (simultaneously) |                                                                                                                                                                                                                                                         |  |
| CEA-709 External NVs (polling)  | 1 000                                                                                                                                                                                                                                                                                                                                                                                         | Number of EnOcean devices    | 25                  |                                                                                                                                                                                                                                                         |  |
| CEA-709 address table entries   | 512 (non-ECS mode: 15)                                                                                                                                                                                                                                                                                                                                                                        | EnOcean data points          | 250                 |                                                                                                                                                                                                                                                         |  |
| LonMark Calendars               | 1 (25 calendar patterns)                                                                                                                                                                                                                                                                                                                                                                      | SMI devices (per channel)    | 16                  |                                                                                                                                                                                                                                                         |  |
| Order Number                    | Product Description                                                                                                                                                                                                                                                                                                                                                                           |                              |                     |                                                                                                                                                                                                                                                         |  |
| LGATE-902                       | Universal Gateway                                                                                                                                                                                                                                                                                                                                                                             |                              |                     |                                                                                                                                                                                                                                                         |  |
| LPOW-2415A                      | LIOB-Connect power supply unit, 24 VDC, 15 W                                                                                                                                                                                                                                                                                                                                                  |                              |                     |                                                                                                                                                                                                                                                         |  |
| LPOW-2415B                      | Power supply unit with power connector 24 VDC, 15 W                                                                                                                                                                                                                                                                                                                                           |                              |                     |                                                                                                                                                                                                                                                         |  |
| L-MBUS20                        | M-Bus level converter for 20 M-Bus devices                                                                                                                                                                                                                                                                                                                                                    |                              |                     |                                                                                                                                                                                                                                                         |  |
| L-MBUS80                        | M-Bus level converter for 80 M-Bus devices                                                                                                                                                                                                                                                                                                                                                    |                              |                     |                                                                                                                                                                                                                                                         |  |
| LKNX-300                        | KNX interface to connect KNX TP1 devices                                                                                                                                                                                                                                                                                                                                                      |                              |                     |                                                                                                                                                                                                                                                         |  |
| LENO-800                        | EnOcean Interface 868 MHz Europe                                                                                                                                                                                                                                                                                                                                                              |                              |                     |                                                                                                                                                                                                                                                         |  |
| LENO-801                        | EnOcean Interface 902 MHz USA/Canada                                                                                                                                                                                                                                                                                                                                                          |                              |                     |                                                                                                                                                                                                                                                         |  |
| LENO-802                        | EnOcean Interface 928 MHz Japan                                                                                                                                                                                                                                                                                                                                                               |                              |                     |                                                                                                                                                                                                                                                         |  |
| LWLAN-800                       | Wireless LAN Interface IEEE 802.11bgn                                                                                                                                                                                                                                                                                                                                                         |                              |                     |                                                                                                                                                                                                                                                         |  |
| LMPBUS-804                      | MP-Bus interface for 16 devices per channel, up to 4 channels                                                                                                                                                                                                                                                                                                                                 |                              |                     |                                                                                                                                                                                                                                                         |  |
| LSMI-800                        | Standard Motor Interface for 16 motors via EXT port                                                                                                                                                                                                                                                                                                                                           |                              |                     |                                                                                                                                                                                                                                                         |  |
| LSMI-804                        | Standard Motor Interface for 64 motors, 4 SMI channels via USB                                                                                                                                                                                                                                                                                                                                |                              |                     |                                                                                                                                                                                                                                                         |  |



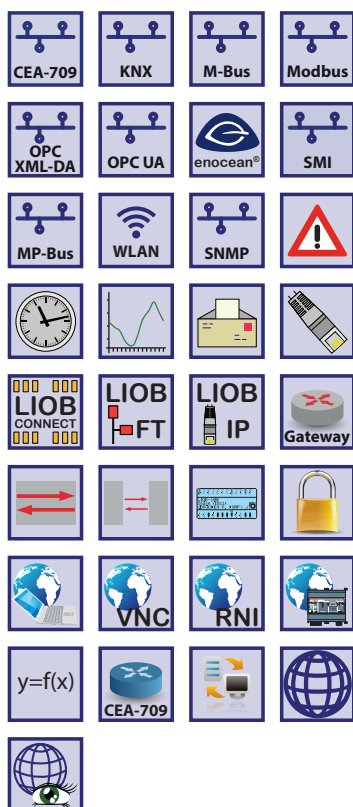

The L-INX Automation Servers LINX-102 and LINX-103 (successors of LINX-100, LINX-101) can host user specific graphical pages for the visualization of information from LonMark systems via LWEB-900 (Building Management) or LWEB-802/803. They can integrate physical I/Os through L-IOB I/O Modules via LIOB-Connect, LIOB-FT, or LIOB-IP. Local operation and override is provided by the built-in jog dial and the backlit display (128x64 pixels). Device and data point information is shown on the display via symbols and in text format.

LonMark Systems can be integrated via IP-852 (Ethernet/IP) or TP/FT-10. In addition, the Automation Servers provides connectivity to concurrently integrate KNX, Modbus, and M-Bus and connect as a gateway data points of different technological origin. Optionally, mathematical objects can be applied within a connection to calculate the data point output values depending on the formula used. Depending on the type, the Automaton Servers feature an integrated Remote Network Interface (LINX-102) or an integrated IP-852 router providing the complete feature set of corresponding L-IP devices (LINX-103).

The gateway functionality allows data communication between all communication technologies available on the device. Different technology data points are mapped through Local Connections on the device. The mapping of different technology data points on distributed devices is supported by Global Connections. L-INX Automation Servers also support Smart Auto-Connect™ – the automatic generation of connections to substantially reduce engineering efforts and cost. All technology data points are automatically created as OPC XML-DA and OPC UA data points.

Each L-INX Automation Server is equipped with two Ethernet ports. It can either be configured to use the internal switch to interconnect the two ports or every port is configured to work in a separate IP network.

When the Ethernet ports are configured for two separate IP networks, one port can be connected for instance to a WAN (Wide Area Network) with enabled network security (HTTPS) while the second port can be configured to be connected to an insecure network (LAN) where the standard building automation protocols like BACnet/IP, LON/IP, or Modbus TCP are present. These devices also feature fire-wall functionality of course to isolate particular protocols or services between the ports.

Using the internal switch, a daisy chained line topology of up to 20 devices can be built, which reduces costs for network installation. The IP switch also allows the setup of a redundant Ethernet installation (ring topology), which increases reliability. The redundant Ethernet topology is enabled by the Rapid Spanning Tree Protocol (RSTP), which is supported by most managed switches.

The L-INX devices provide fully featured AST™ functionality (Alarming, Scheduling, and Trending) and can be integrated perfectly into the L-WEB System.

## Features



- Visualization of customized graphical pages through LWEB-900 (Building Management), LWEB-803 (Monitoring and Control), or LWEB-802 (Web Browser)
- Stores customized graphical pages
- Extension with physical inputs and outputs using L-IOB I/O Modules (LIOB-10x, LIOB-15x, and LIOB-45x)
- 128x64 graphic display with backlight
- Local and remote access to information about device status and data points
- Manual operation using the jog dial or VNC client
- Alarming, Scheduling, and Trending (AST™)
- Event-driven e-mail notification
- Math objects to execute mathematical operations on data points
- Integrated OPC XML-DA and OPC UA server
- Dual switched or separated Ethernet ports
- Access to network statistics
- Compliant with CEA-709, CEA-852, and ISO/IEC 14908 Standard (LonMark System)
- Support TP/FT-10 or IP-852 (Ethernet/IP)
- Support of dynamically created or static NVs
- Support of user-defined NVs (UNVTs) and Configuration Properties (SCPTs, UCPTs)

LINX-102, LINX-103

- Remote Network Interface (RNI) with 2 MNI devices (LINX-102 only)
- Integrated IP-852 to TP/FT-10 Router (LINX-103 only)
- KNXnet/IP, connection to KNX TP1 through LKNX-300 Interface
- M-Bus Master according to EN 13757-3, connection via optional M-Bus Converter (L-MBUS20 or L-MBUS80)
- Modbus TCP and Modbus RTU (Master or Slave)
- Gateway functions including Smart Auto-Connect™
- Integrated web server for device configuration and monitoring data points
- Configurable via Ethernet/IP or TP/FT-10
- Connection to EnOcean wireless devices via LENO-80x Interface
- Supports SMI (Standard Motor Interface) through LSMI-80x
- Supports WLAN through LWLAN-800 Interface
- Supports MP-Bus through LMPBUS-804 Interface
- Stores user-defined project documentation

| Specifications               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                              |                     |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------|
| Dimensions (mm)              | 107 x 100 x 75 (L x W x H), DIM045                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                              |                     |
| Installation                 | DIN rail mounting following DIN 43880, top hat rail EN 50022                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                              |                     |
| Power supply                 | 12 – 35 VDC / 12 – 24 V AC ±10 %, typ. 2.5 W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                              |                     |
| Operating conditions         | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                              |                     |
| Interfaces                   | <div><div>2 x Ethernet (100Base-T):<br/>OPC XML-DA, OPC UA,<br/>LonMark IP-852*,<br/>LIOB-IP,<br/>KNXnet/IP,<br/>Modbus TCP (Master or Slave),<br/>HTTP, FTP, SSH, HTTPS,<br/>Firewall, VNC, SNMP<br/>1 x LIOB-Connect<br/>1 x TP/FT-10* (LonMark system)<br/>together with<br/>LIOB-FT</div><div>1 x RS-485 (ANSI TIA/EIA-485):<br/>Modbus RTU (Master or Slave)<br/>1 x EXT:<br/>M-Bus, Master EN 13757-3 (needs L-MBUS20 or L-MBUS80)<br/>or<br/>KNX TP1 (needs LKNX-300)<br/>or<br/>SMI (needs LSMI-800)<br/>2 x USB-A:<br/>WLAN (needs LWLAN-800),<br/>EnOcean (needs LENO-80x),<br/>SMI (needs LSMI-804)<br/>MP-Bus (needs LMPBUS-804)</div></div> <div>LINX-102: * Either LonMark IP-852 or TP/FT-10<br/>LINX-103: * Router between LonMark IP-852 and TP/FT-10</div> |                              |                     |
| L-IOB I/O Modules            | Up to 8 L-IOB I/O Modules in any combination of type LIOB-10x, LIOB-15x, and LIOB-45x                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                              |                     |
| Remote Network Interface     | 1 RNI with 2 MNI devices (LINX-102 only)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                              |                     |
| CEA-709 Router               | 1 (LINX-103 only)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                              |                     |
| Tools                        | L-INX Configurator                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                              |                     |
| Resource limits              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                              |                     |
| Total number of data points  | 10 000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Math objects                 | 100                 |
| OPC data points              | 2 000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Alarm logs                   | 10                  |
| Network variables (NVs)      | 1 000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | M-Bus data points            | 1 000               |
| Alias NVs                    | 1 000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Modbus data points           | 2 000               |
| External NVs (polling)       | 1 000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | KNX TP1 data points          | 250                 |
| Address table entries        | 1 000 (non-ECS mode: 15)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | KNXnet/IP data points        | 250                 |
| LonMark Calendars            | 1 (25 calendar patterns)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Connections (Local / Global) | 1 000 / 250         |
| LonMark Schedulers           | 100                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Number of L-WEB clients      | 32 (simultaneously) |
| LonMark Alarm Servers        | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | L-IOB I/O Modules            | 8                   |
| Trend logs                   | 256 (4 000 000 entries, ≈ 60 MB)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Number of EnOcean devices    | 25                  |
| Total trended data points    | 256                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | EnOcean data points          | 250                 |
| E-mail templates             | 100                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | SMI devices (per channel)    | 16                  |
| MP-Bus devices (per channel) | 16                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                              |                     |

| Order number | Product description                                                                         |
|--------------|---------------------------------------------------------------------------------------------|
| LINX-102     | CEA-709 Automation Server with LIOB-Connect and built-in Remote Network Interface (RNI)     |
| LINX-103     | CEA-709 Automation Server with LIOB-Connect and built-in IP-852 Router                      |
| LIOB-A2      | L-IOB Adapter 2 to split the LIOB-Connect bus using 4-wire cables                           |
| LIOB-A4      | L-IOB Adapter 4 to split the LIOB-Connect bus using RJ45 network cables                     |
| LIOB-A5      | L-IOB Adapter 5 to terminate the LIOB-Connect bus                                           |
| LIOB-100     | LIOB-Connect I/O Module: 8 UI, 2 DI, 2 AO, 9 DO (5 x Relay 6 A, 4 x Triac 0.5 A)            |
| LIOB-101     | LIOB-Connect I/O Module: 8 UI, 16 DI                                                        |
| LIOB-102     | LIOB-Connect I/O Module: 6 UI, 6 AO, 8 DO (8 x Relay 6 A)                                   |
| LIOB-103     | LIOB-Connect I/O Module: 6 UI, 6 AO, 5 DO (5 x Relay 16 A)                                  |
| LIOB-150     | LIOB-FT I/O Module: 8 UI, 2 DI, 2 AO, 8 DO (4 x Relay 6 A, 4 x Triac 0.5 A)                 |
| LIOB-151     | LIOB-FT I/O Module: 8 UI, 12 DI                                                             |
| LIOB-152     | LIOB-FT I/O Module: 6 UI, 6 AO, 8 DO (8 x Relay 6 A)                                        |
| LIOB-153     | LIOB-FT I/O Module: 6 UI, 6 AO, 5 DO (4 x Relay 16 A, 1 x Relay 6 A)                        |
| LIOB-154     | LIOB-FT I/O Module: 7 UI, 4 AO, 7 DO (5 x Relay 6 A, 2 x Triac 0.5 A), 1 Pressure Sensor    |
| LIOB-450     | LIOB-IP852 I/O Module: 8 UI, 2 DI, 2 AO, 8 DO (4 x Relay 6 A, 4 x Triac 0.5 A)              |
| LIOB-451     | LIOB-IP852 I/O Module: 8 UI, 12 DI                                                          |
| LIOB-452     | LIOB-IP852 I/O Module: 6 UI, 6 AO, 8 DO (8 x Relay 6 A)                                     |
| LIOB-453     | LIOB-IP852 I/O Module: 6 UI, 6 AO, 5 DO (4 x Relay 16 A, 1 x Relay 6 A)                     |
| LIOB-454     | LIOB-IP852 I/O Module: 7 UI, 4 AO, 7 DO (5 x Relay 6 A, 2 x Triac 0.5 A), 1 Pressure Sensor |
| LPOW-2415A   | LIOB-Connect power supply unit, 24 VDC, 15 W                                                |
| LPOW-2415B   | Power supply unit with power connector 24 VDC, 15 W                                         |
| L-MBUS20     | M-Bus level converter for 20 M-Bus devices                                                  |
| L-MBUS80     | M-Bus level converter for 80 M-Bus devices                                                  |
| LKNX-300     | KNX interface to connect KNX TP1 devices                                                    |
| LENO-800     | EnOcean Interface 868 MHz Europe                                                            |
| LENO-801     | EnOcean Interface 902 MHz USA/Canada                                                        |
| LENO-802     | EnOcean Interface 928 MHz Japan                                                             |
| LWLAN-800    | Wireless LAN Interface IEEE 802.11bgn                                                       |
| LMPBUS-804   | MP-Bus interface for 16 devices per channel, up to 4 channels                               |
| LSMI-800     | Standard Motor Interface for 16 motors via EXT port                                         |
| LSMI-804     | Standard Motor Interface for 64 motors, 4 SMI channels via USB                              |

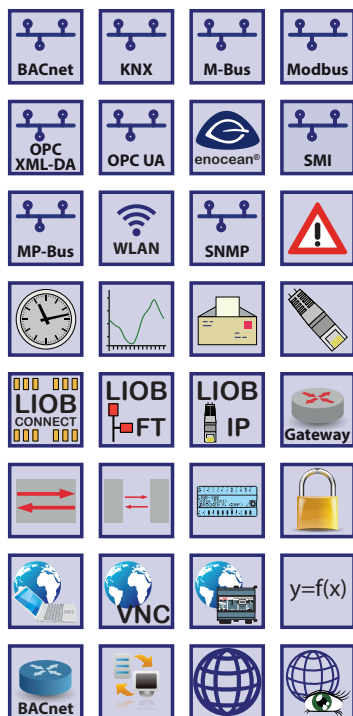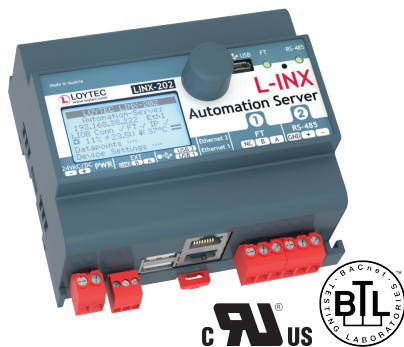

The L-INX Automation Servers LINX-202 and LINX-203 (successors of LINX-200, LINX-201) can host user specific graphical pages for the visualization of information from BACnet networks via LWEB-900 (Building Management) or LWEB-802/803. They can integrate physical I/Os through LIOB I/O Modules via LIOB-Connect, LIOB-FT, or LIOB-IP. Local operation and override is provided by the built-in jog dial and the backlit display (128x64 pixels). Device and data point information is shown on the display via symbols and in text format.

BACnet can be integrated via BACnet/IP or BACnet MS/TP. In addition, the Automation Servers provide connectivity to concurrently integrate KNX, Modbus, and M-Bus and connect as a gateway data points of different technological origin. Optionally, mathematical objects can be applied within a connection to calculate the data point output values depending on the formula used. Depending on the type, the Automaton Servers feature a BACnet/IP router including BBMD as well as Slave-Proxy functionality (LINX-203). LINX-202 and LINX-203 are BTL certified as B-BC (BACnet Building Controller).

The gateway functionality allows data communication between all communication technologies available on the device. Different technology data points are mapped through Local Connections on the device. The mapping of different technology data points on distributed devices is supported by Global Connections. L-INX Automation Servers also support Smart Auto-Connect™ – the automatic generation of connections to substantially reduce engineering efforts and cost. All technology data points are automatically created as OPC XML-DA and OPC UA data points.

Each L-INX Automation Server is equipped with two Ethernet ports. It can either be configured to use the internal switch to interconnect the two ports or every port is configured to work in a separate IP network.

When the Ethernet ports are configured for two separate IP networks, one port can be connected for instance to a WAN (Wide Area Network) with enabled network security (HTTPS) while the second port can be configured to be connected to an insecure network (LAN) where the standard building automation protocols like BACnet/IP, LON/IP, or Modbus TCP are present. These devices also feature fire-wall functionality of course to isolate particular protocols or services between the ports.

Using the internal switch, a daisy chained line topology of up to 20 devices can be built, which reduces costs for network installation. The IP switch also allows the setup of a redundant Ethernet installation (ring topology), which increases reliability. The redundant Ethernet topology is enabled by the Rapid Spanning Tree Protocol (RSTP), which is supported by most managed switches.

The L-INX devices provide fully featured AST™ functionality (Alarming, Scheduling, and Trending) and can be integrated perfectly into the L-WEB System.

## Features

- Visualization of customized graphical pages through LWEB-900 (Building Management), LWEB-803 (Monitoring and Control), or LWEB-802 (Web Browser)
- Stores customized graphical pages
- Extension with physical inputs and outputs using LIOB I/O Modules (LIOB-10x, LIOB-15x, and LIOB-55x)
- 128x64 graphic display with backlight
- Local and remote access to information about device status and data points
- Manual operation using the jog dial or VNC client
- Alarming, Scheduling, and Trending (AST™)
- Event-driven e-mail notification
- Math objects to execute mathematical operations on data points
- Integrated OPC XML-DA and OPC UA server
- Dual switched or separated Ethernet ports
- Access to network statistics
- Compliant with ANSI/ASHRAE 135-2012 and ISO 16484-5:2012 standard
- Supports BACnet MS/TP or BACnet/IP
- BACnet Client Function (Write Property, Read Property, COV Subscription)



- BACnet Client Configuration with configuration tool (scan and EDE import)
- B-BC (BACnet Building Controller) functionality, BTL certified
- Integrated BACnet/IP to BACnet MS/TP Router including BBMD as well as Slave-Proxy functionality (LINX-203 only)
- KNXnet/IP, connection to KNX TP1 through LKNX-300 Interface
- M-Bus Master according to EN 13757-3, connection via optional M-Bus Converter (L-MBUS20 or L-MBUS80)
- Modbus TCP and Modbus RTU (Master or Slave)
- Gateway functions including Smart Auto-Connect™
- Integrated web server for device configuration and monitoring data points
- Configurable via Ethernet/IP
- Connection to EnOcean wireless devices via LENO-80x Interface
- Supports SMI (Standard Motor Interface) through LSMI-80x
- Supports WLAN through LWLAN-800 Interface
- Supports MP-Bus through LMPBUS-804 Interface
- Stores user-defined project documentation

## Specifications

|                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Dimensions (mm)      | 107 x 100 x 75 (L x W x H), DIM045                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  |
| Installation         | DIN rail mounting following DIN 43880, top hat rail EN 50022                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |  |
| Power supply         | 12 – 35 VDC / 12 – 24 VAC ±10 %, typ. 2.5 W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |  |
| Operating conditions | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |
| Interfaces           | <div> <div> 2 x Ethernet (100Base-T):<br/> OPC XML-DA, OPC UA,<br/> BACnet/IP*,<br/> LIOB-IP,<br/> KNXnet/IP,<br/> Modbus TCP (Master or Slave),<br/> HTTP, FTP, SSH, HTTPS,<br/> Firewall, VNC, SNMP<br/> 1 x LIOB-Connect<br/> 1 x LIOB-FT<br/> 1 x RS-485 (ANSI TIA/EIA-485):<br/> BACnet MS/TP*<br/> or<br/> Modbus RTU (Master or Slave) </div> <div> 1 x EXT:<br/> M-Bus, Master EN 13757-3<br/> (needs L-MBUS20 or L-MBUS80)<br/> or<br/> KNX TP1 (needs LKNX-300)<br/> or<br/> SMI (needs LSMI-800)<br/> 2 x USB-A:<br/> WLAN (needs LWLAN-800),<br/> EnOcean (needs LENO-80x)<br/> SMI (needs LSMI-804)<br/> MP-Bus (needs LMPBUS-804) </div> </div> <p><i>LINX-202: * Either BACnet/IP or BACnet MS/TP</i><br/> <i>LINX-203: * Router between BACnet/IP and BACnet MS/TP</i></p> |  |
| L-IOB I/O Modules    | Up to 8 L-IOB I/O Modules in any combination of type LIOB-10x, LIOB-15x, and LIOB-55x                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |
| BACnet/IP Router     | 1 (LINX-203 only)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |  |
| Tools                | L-INX Configurator                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  |

## Resource limits

|                                |                                   |                              |                     |
|--------------------------------|-----------------------------------|------------------------------|---------------------|
| Total number of data points    | 10 000                            | Alarm logs                   | 10                  |
| OPC data points                | 2 000                             | M-Bus data points            | 1 000               |
| BACnet objects                 | 750 (analog, binary, multi-state) | Modbus data points           | 2 000               |
| BACnet client mappings         | 750                               | KNX TP1 data points          | 250                 |
| BACnet calendar objects        | 25                                | KNXnet/IP data points        | 250                 |
| BACnet scheduler objects       | 100 (64 data points per object)   | Connections (Local / Global) | 1 000 / 250         |
| BACnet notification classes    | 32                                | Number of L-WEB clients      | 32 (simultaneously) |
| Trend logs (BACnet or generic) | 256 (4 000 000 entries, ≈ 60 MB)  | L-IOB I/O Modules            | 8                   |
| Total trended data points      | 256                               | Number of EnOcean devices    | 25                  |
| E-mail templates               | 100                               | EnOcean data points          | 250                 |
| Math objects                   | 100                               | SMI devices (per channel)    | 16                  |
| MP-Bus devices (per channel)   | 16                                |                              |                     |

L-INX Automation Server

LINX-202, LINX-203

| Order number | Product description                                                                       |
|--------------|-------------------------------------------------------------------------------------------|
| LINX-202     | BACnet Automation Server with LIOB-Connect, B-BC                                          |
| LINX-203     | BACnet Automation Server with LIOB-Connect, B-BC, and built-in BACnet/IP to MS/TP Router  |
| LIOB-A2      | L-IOB Adapter 2 to split the LIOB-Connect bus using 4-wire cables                         |
| LIOB-A4      | L-IOB Adapter 4 to split the LIOB-Connect bus using RJ45 network cables                   |
| LIOB-A5      | L-IOB Adapter 5 to terminate the LIOB-Connect bus                                         |
| LIOB-100     | LIOB-Connect I/O Module: 8 UI, 2 DI, 2 AO, 9 DO (5 x Relay 6 A, 4 x Triac 0.5 A)          |
| LIOB-101     | LIOB-Connect I/O Module: 8 UI, 16 DI                                                      |
| LIOB-102     | LIOB-Connect I/O Module: 6 UI, 6 AO, 8 DO (8 x Relay 6 A)                                 |
| LIOB-103     | LIOB-Connect I/O Module: 6 UI, 6 AO, 5 DO (5 x Relay 16 A)                                |
| LIOB-150     | LIOB-FT I/O Module: 8 UI, 2 DI, 2 AO, 8 DO (4 x Relay 6 A, 4 x Triac 0.5 A)               |
| LIOB-151     | LIOB-FT I/O Module: 8 UI, 12 DI                                                           |
| LIOB-152     | LIOB-FT I/O Module: 6 UI, 6 AO, 8 DO (8 x Relay 6 A)                                      |
| LIOB-153     | LIOB-FT I/O Module: 6 UI, 6 AO, 5 DO (4 x Relay 16 A, 1 x Relay 6 A)                      |
| LIOB-154     | LIOB-FT I/O Module: 7 UI, 4 AO, 7 DO (5 x Relay 6 A, 2 x Triac 0.5 A), 1 Pressure Sensor  |
| LIOB-550     | LIOB-BIP I/O Module: 8 UI, 2 DI, 2 AO, 8 DO (4 x Relay 6 A, 4 x Triac 0.5 A)              |
| LIOB-551     | LIOB-BIP I/O Module: 8 UI, 12 DI                                                          |
| LIOB-552     | LIOB-BIP I/O Module: 6 UI, 6 AO, 8 DO (8 x Relay 6 A)                                     |
| LIOB-553     | LIOB-BIP I/O Module: 6 UI, 6 AO, 5 DO (4 x Relay 16 A, 1 x Relay 6 A)                     |
| LIOB-554     | LIOB-BIP I/O Module: 7 UI, 4 AO, 7 DO (5 x Relay 6 A, 2 x Triac 0.5 A), 1 Pressure Sensor |
| LPOW-2415A   | LIOB-Connect power supply unit, 24 VDC, 15 W                                              |
| LPOW-2415B   | Power supply unit with power connector 24 VDC, 15 W                                       |
| L-MBUS20     | M-Bus level converter for 20 M-Bus devices                                                |
| L-MBUS80     | M-Bus level converter for 80 M-Bus devices                                                |
| LKNX-300     | KNX interface to connect KNX TP1 devices                                                  |
| LENO-800     | EnOcean Interface 868 MHz Europe                                                          |
| LENO-801     | EnOcean Interface 902 MHz USA/Canada                                                      |
| LENO-802     | EnOcean Interface 928 MHz Japan                                                           |
| LWLAN-800    | Wireless LAN Interface IEEE 802.11bgn                                                     |
| LMPBUS-804   | MP-Bus interface for 16 devices per channel, up to 4 channels                             |
| LSMI-800     | Standard Motor Interface for 16 motors via EXT port                                       |
| LSMI-804     | Standard Motor Interface for 64 motors, 4 SMI channels via USB                            |



# L-VIS, L-STAT Touch Panels & Network Thermostats






## L-VIS Overview

L-VIS Touch Panels for visualization and operation of information in LonMark, BACnet, and Modbus networks are not only perfectly suitable for local operation, they also offer various remote access options that can be used simultaneously if required:

- VNC: The graphical user interface can be accessed via the built-in VNC server by a commercial or free VNC-Client.
- LWEB-803: The graphical user interface allows remote access to the graphical projects on the L-VIS Touch Panel from a Microsoft Windows PC. Communication is done by using web services – smoothly across firewalls and NAT routers.
- LWEB-802: The platform-independent graphical user interface enables remote access to the graphical projects on the L-VIS Touch Panel by a standard web browser. The use of HTML5 and JavaScript allows applying smart phones and tablets also.
- LWEB-900: L-VIS Touch Panels integrate perfectly into the L-WEB System.

Various remote access options, alarming, scheduling, trending, and e-mails sent on a timely basis or triggered by events offer amazing flexibility and versatility. Depending on the interface, L-VIS Touch Panels behave compliant to LonMark Systems or BACnet networks.

Furthermore, the L-VIS Touch Panel can be used as an OPC XML-DA client to LOYTEC devices (OPC XML-DA server) in the Ethernet/IP network. If connected to a LOYTEC device, information from KNX, Modbus and M-Bus networks can be integrated and visualized in addition to information from LonMark Systems or BACnet networks.

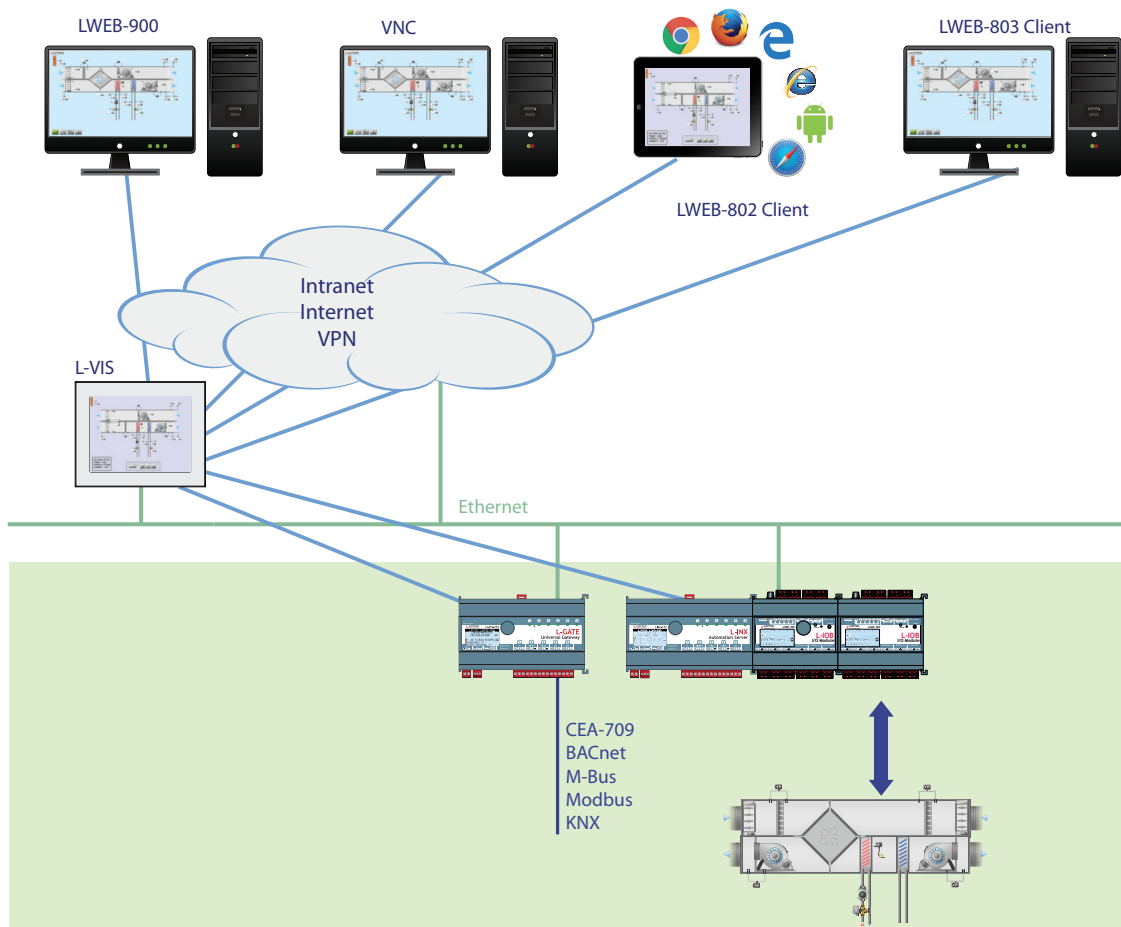





L-VIS Touch Panels for LonMark, BACnet, and Modbus networks are ideally suited for visualization and operation of various applications in building automation. L-VIS Touch Panels visualize building systems, can be used as room operator panels, in hospital operation or isolation rooms, conference and reception areas. The fully customizable user screens can show dynamic pages that are easy to navigate. L-VIS Touch Panels make use of an extremely low power embedded controller platform and operating system. This makes L-VIS resistant against problems when re-booting after power outage and also against any viruses.

L-VIS impresses with its timeless design, harmonic integration into modern and historical architecture, and with its extremely user friendly concept. The shallow installation depth and low thermal power loss allow mounting in almost any location.

### Different Sizes

L-VIS Touch Panels are available in the following variations:

|               |                                                                 |            |                |
|---------------|-----------------------------------------------------------------|------------|----------------|
| LVIS-3ME7-Gx  | 7" Touch Display<br>Frameless glass front and capacitive touch  | 800 x 480  | 262 144 colors |
| LVIS-3ME12-A1 | 12.1" Touch Display<br>Aluminum frame with anodized finish      | 800 x 600  | 262 144 colors |
| LVIS-3ME15-A1 | 15" Touch Display<br>Aluminum frame with anodized finish        | 1024 x 768 | 262 144 colors |
| LVIS-3ME15-Gx | 15" Touch Display<br>Frameless glass front and capacitive touch | 1024 x 768 | 262 144 colors |

### Dynamic Graphical Pages

The graphical pages may consist of multiple dynamic graphical controls that show the current plant status in real time. It is also possible to access decentralized schedules, alarm servers, or trends. The graphical projects are designed with the L-VIS/L-WEB configuration tool free of charge. Without any know-how in HTML or Java, user specific graphical pages can be created. Dynamic information is shown through value or text controls, changing symbols, bar charts, trend views, alarm and event lists, or schedule controls. The L-VIS/L-WEB configuration tool allows for using most of the pixel graphic formats (GIF, JPG, BMP, TIFF, PNG, MNG, ICO), vector graphics (SVG) and alpha blending.

### Playback of Audio Files and Streams

The L-VIS Touch Panel supports the playback of stereo MP3, WAV, and MP3 streams (for example webradio). The playback will be started or stopped by the respective action object. The action object is linked to one of the available audio files or to the URL of an MP3 stream. When accessing a playback via LWEB-802 or LWEB-803, it will be executed locally on the client.

### Automatic Page Generation

Pages including data point names and values, alarm views, schedules, or trends can be created automatically by the L-VIS/L-WEB configuration tool. This significantly reduces engineering time and cost.

### Connectivity and Data Points

The L-VIS Touch Panels support connectivity to LonMark Systems and BACnet networks. In addition, the Touch Panels provide communication to Modbus either as Master or Slave. For this purpose, Modbus TCP is supported exclusively and Modbus RTU is available via the RS-485 terminal.

L-VIS Touch Panels communicate with LonMark Systems via IP-852 (Ethernet/IP) or TP/FT-10 channels. The integrated remote network interface (Ethernet/IP) provides remote access to the TP/FT-10 channel for configuration, service and maintenance purposes.

## L-VIS Touch Panel

# LVIS-3ME7-Gx/3ME12-A1/3ME15-A1/3ME15-Gx

In addition, the L-VIS Touch Panels provide connectivity to Modbus TCP via Ethernet/IP.

BACnet networks are connected via BACnet/IP or BACnet MS/TP. The L-VIS Touch Panels implement the BACnet Building Controller (B-BC) profile. They include a fully featured built-in BACnet/IP to MS/TP router with BBMD (BACnet Broadcast Management Device) and slave proxy functionality.

Math objects can calculate any kind of formula using data points available on the device. The resulting data point value can then be either shown on the page or provided via an output Network Variable. Network Variables are automatically mapped to OPC data points that can be accessed via web services.

The L-VIS devices are equipped with two Ethernet ports. It can either be configured to use the internal switch to interconnect the two ports or every port is configured to work in a separate IP network.

When the Ethernet ports are configured for two separate IP networks, one port can be connected for instance to a WAN (Wide Area Network) with enabled network security (HTTPS) while the second port can be configured to be connected to an insecure network (LAN) where the standard building automation protocols like BACnet/IP, LON/IP, or Modbus TCP are present. These devices also feature firewall functionality of course to isolate particular protocols or services between the ports.

Using the internal switch, a daisy chained line topology of up to 20 devices can be built, which reduces costs for network installation. The IP switch also allows the setup of a redundant Ethernet installation (ring topology), which increases reliability. The redundant Ethernet topology is enabled by the Rapid Spanning Tree Protocol (RSTP), which is supported by most managed switches.


The L-VIS devices provide fully featured AST™ functionality (Alarming, Scheduling, and Trending) and can be integrated perfectly into the L-WEB Building Management System.

### Features

- High resolution TFT touch display with dimmable backlight
- Anodized aluminum front frame or frameless glass front and capacitive touch (LVIS-3ME7-Gx/LVIS-3ME15-Gx)
- Flush-mounting in combination with the mounting frame
- Stores customized graphical pages
- Visualization of customized graphical pages through built-in touch panel, LWEB-900 (building management), and LWEB-802/803
- Device configuration and graphical page creation with the L-VIS/L-WEB configuration tool free of charge
- Supports all popular graphic file formats such as GIF, JPG, BMP, TIFF, PNG, MNG, ICO
- Support of SVG vector graphics
- Supports alpha blending
- Supports popular font types such as TrueType, Type-1, BDF, PCF, and OTF
- Supports Unicode text
- Built-in OPC UA and OPC XML-DA server
- Built-in OPC XML-DA client
- Dual switched or separated Ethernet ports
- Alarming, Scheduling, and Trending (AST™)
- Event-driven e-mail notification
- Math objects to execute mathematical operations on data points
- Compliant with CEA-709, CEA-852, and ISO/IEC 14908 Standard (LonMark System)
- Supports CEA-709 TP/FT-10 or IP-852 (Ethernet/IP)
- Support of dynamically created network variables or static network variables
- Support of user-defined NVs (UNVTs) and Configuration Properties (SCPTs, UCPTs)
- Remote Network Interface (RNI) with 2 MNI devices
- Compliant with ANSI/ASHRAE 135-2012 and ISO 16484-5:2012 standard
- Supports BACnet MS/TP and BACnet/IP
- BACnet Client Function (Write Property, Read Property, COV Subscription)
- BACnet Client Configuration with configuration tool (scan and EDE import)
- B-BC (BACnet Building Controller)
- Integrated BACnet/IP to BACnet MS/TP Router
- BBMD (BACnet Broadcast Management Device)
- Modbus TCP and Modbus RTU (Master or Slave)
- Integrated web server for device configuration and monitoring data points
- Access to network statistics
- Configurable via Ethernet/IP or TP/FT-10
- Playback of audio files and streams
- Supports WLAN through LWLAN-800 Interface

## LVIS-3ME7-Gx/3ME12-A1/3ME15-A1/3ME15-Gx

| Specifications           |                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                        |                                                                                        |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
| Type                     | LVIS-3ME7-Gx                                                                                                                                                                                                                                                                                                                                                                                                                               | LVIS-3ME12-A1                                                                          | LVIS-3ME15-xx                                                                          |
| Screen size              | 7" (178 mm)                                                                                                                                                                                                                                                                                                                                                                                                                                | 12.1" (307 mm)                                                                         | 15" (381 mm)                                                                           |
| Dimensions (mm)          | 223.5 x 162 x 65 (L x W x H), DIM004                                                                                                                                                                                                                                                                                                                                                                                                       | 329 x 268.3 x 65 (L x W x H), DIM002                                                   | 394 x 318 x 65 (L x W x H), DIM003                                                     |
| Dimensions cut-out (mm)  | 195 x 143 x 61 (L x W x H)                                                                                                                                                                                                                                                                                                                                                                                                                 | 300 x 250 x 61 (L x W x H)                                                             | 355 x 295 x 61 (L x W x H)                                                             |
| Display resolution       | 800 x 480, 262 144 colors                                                                                                                                                                                                                                                                                                                                                                                                                  | 800 x 600, 262 144 colors                                                              | 1024x 768, 262 144 colors                                                              |
| Interfaces               | 2 x Ethernet (100Base-T), Switch,<br>OPC UA (server) and OPC XML-DA (server, client),<br>LonMark IP-852, BACnet/IP,<br>Modbus TCP (Master or Slave),<br>HTTP, FTP, SSH, HTTPS, SMTP, NTP, VNC<br>1 x TP/FT-10<br>1 x RS-485 (ANSI TIA/EIA-485):<br>BACnet MS/TP<br>or<br>Modbus RTU (Master or Slave)<br>2 x Digital Input<br>2 x USB-A: (LVIS-3ME15-Gx only 1 x USB-A)<br>WLAN (needs LWLAN-800)<br>1 x USB-B (PC), speaker, audio output |                                                                                        |                                                                                        |
| Remote Network Interface | 1 RNI with 2 MNI devices                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                        |                                                                                        |
| Power supply             | 24 VDC ±10 %, 2.5 W,<br>backlight on: 5 W                                                                                                                                                                                                                                                                                                                                                                                                  | 24 VDC ±10 %, 4 W,<br>backlight on: 10 W or<br>85-240 V AC, 7 W,<br>backlight on: 13 W | 24 VDC ±10 %, 4 W,<br>backlight on: 10 W or<br>85-240 V AC, 7 W,<br>backlight on: 13 W |
| Operating conditions     | +10 °C to 40 °C, 10-90 % RH, non condensing                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                        |                                                                                        |
| Degree of protection     | Front: IP54 / back: IP10                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                        |                                                                                        |
| Tools                    | L-VIS/L-WEB Configurator                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                        |                                                                                        |
| Resource limits          |                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                        |                                                                                        |
| OPC data points          | 10 000                                                                                                                                                                                                                                                                                                                                                                                                                                     | BACnet calendar objects                                                                | 25                                                                                     |
| Modbus data points       | 2 000                                                                                                                                                                                                                                                                                                                                                                                                                                      | BACnet scheduler objects                                                               | 100 (64 data points per object)                                                        |
| VNC clients              | 16                                                                                                                                                                                                                                                                                                                                                                                                                                         | BACnet notification classes                                                            | 32                                                                                     |
| Network variables (NVs)  | 1 000                                                                                                                                                                                                                                                                                                                                                                                                                                      | E-mail templates                                                                       | 100                                                                                    |
| Alias NVs                | 1 000                                                                                                                                                                                                                                                                                                                                                                                                                                      | Math objects                                                                           | 2 000                                                                                  |
| Address table entries    | 524 (non-ECS mode: 15)                                                                                                                                                                                                                                                                                                                                                                                                                     | Alarm logs                                                                             | 100                                                                                    |
| LonMark Calendars        | 1 (25 calendar patterns)                                                                                                                                                                                                                                                                                                                                                                                                                   | Trend logs                                                                             | 512 (4 000 000 entries, ≈ 60 MB)                                                       |
| LonMark Schedulers       | 100                                                                                                                                                                                                                                                                                                                                                                                                                                        | Total trended data points                                                              | 512                                                                                    |
| LonMark Alarm Servers    | 1                                                                                                                                                                                                                                                                                                                                                                                                                                          | Connections (Local/Global)                                                             | 2 000/250                                                                              |
| BACnet server objects    | 512                                                                                                                                                                                                                                                                                                                                                                                                                                        | Number of L-WEB clients                                                                | 32 (simultaneously)                                                                    |
| Order number             | Product description                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                        |                                                                                        |
| LVIS-3ME7-G1             | CEA-709, BACnet, and Modbus Touch Panel 7", frameless glass front and capacitive touch, silver                                                                                                                                                                                                                                                                                                                                             |                                                                                        |                                                                                        |
| LVIS-3ME7-G2             | CEA-709, BACnet, and Modbus Touch Panel 7", frameless glass front and capacitive touch, black                                                                                                                                                                                                                                                                                                                                              |                                                                                        |                                                                                        |
| LVIS-3ME12-A1            | CEA-709, BACnet, and Modbus Touch Panel 12.1", aluminum frame with anodized finish                                                                                                                                                                                                                                                                                                                                                         |                                                                                        |                                                                                        |
| LVIS-3ME15-A1            | CEA-709, BACnet, and Modbus Touch Panel 15", aluminum frame with anodized finish                                                                                                                                                                                                                                                                                                                                                           |                                                                                        |                                                                                        |
| LVIS-3ME15-G1            | CEA-709, BACnet, and Modbus Touch Panel 15", frameless glass front and capacitive touch, silver                                                                                                                                                                                                                                                                                                                                            |                                                                                        |                                                                                        |
| LVIS-3ME15-G2            | CEA-709, BACnet, and Modbus Touch Panel 15", frameless glass front and capacitive touch, black                                                                                                                                                                                                                                                                                                                                             |                                                                                        |                                                                                        |
| LVIS-3ME15-G3            | CEA-709, BACnet, and Modbus Touch Panel 15", frameless glass front and capacitive touch, white                                                                                                                                                                                                                                                                                                                                             |                                                                                        |                                                                                        |
| LVIS-FRAME7              | Mounting frame for 7" Touch Panels                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                        |                                                                                        |
| LVIS-FRAME12             | Mounting frame for 12.1" Touch Panels                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                        |                                                                                        |
| LVIS-FRAME15             | Mounting frame for 15" Touch Panels                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                        |                                                                                        |
| LWLAN-800                | Wireless LAN Interface IEEE 802.11bgn                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                        |                                                                                        |




The L-STAT is a network thermostat device with a modern, minimalistic look that fits any interior design. It is directly connected to a LOYTEC controller with a Modbus interface such as LIOB-AIR or L-ROC.

Up to 16 L-STAT devices can be connected to one controller to offer control at different locations in- or outside even for the largest rooms. The L-STAT is equipped with a segmented LCD display featuring an RGB backlight with adjustable color, offering a neat way to make the L-STAT match the interior color concept of an office building. Eight capacitive touch buttons are used to cycle through sensor values, display parameters, and adjust setpoints. Up to four external buttons can be accessed and processed by the controller.

The L-STAT's internal sensors measure temperature, humidity, dew point, occupancy, and CO<sub>2</sub> level. Sensor values can be displayed in SI or US units. Additionally, the date and time as well as the current level of eco-friendliness in the form of green leaves are also displayed on the LCD display. Parameters controlled by the controller's logic can be overridden on the L-STAT, such as for occupancy, air conditioning, and ventilation. A direct access mode is available to quickly adjust the most important setpoints e.g. for temperature and ventilation control.

A buzzer provides acoustic feedback for the touch buttons and can also be used to indicate alarms and error states. To prevent unauthorized modifications, two access levels (end user, system integrator) are used, which are secured via 4-digit pin codes. Device replacement, firmware upgrade, and L-STAT configuration are performed with very little effort through the controller. The L-STAT device is represented in the controller by a simple data point interface, which can be directly connected to the IEC 61131 or IEC 61499 logic application and offers all common functions for data points such as alarming, scheduling, trending, historic filters, math functions, etc.

Using an NFC tag, the L-STAT transmits the URL of the controller's web interface to mobile devices for more extensive control and administrative tasks. Last but not least, the L-STAT comes with a built-in infrared receiver for comfortable remote control.

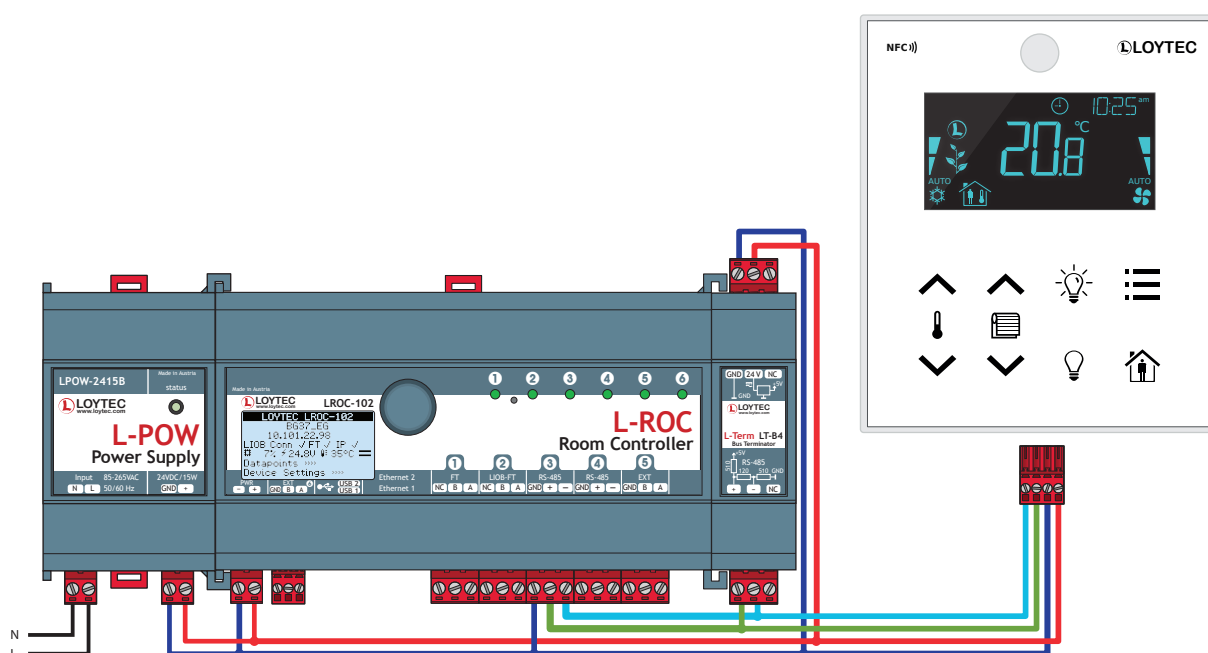



## LSTAT-800, LSTAT-801, LSTAT-802

| Specifications                                       |                                                                                                                                                                                                                               |                      |                            |
|------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|----------------------------|
| Type                                                 | LSTAT-800-Gx-Lxxx                                                                                                                                                                                                             | LSTAT-801-Gx-Lxxx    | LSTAT-802-Gx-Lxxx          |
| Dimensions (mm)                                      | 94.5 x 110 x 19.5 (W x H x D), DIM032                                                                                                                                                                                         |                      |                            |
| Installation                                         | Onto a flush-mounted box                                                                                                                                                                                                      |                      |                            |
| Power supply                                         | 24 VDC ±10 %, max. 0.8 W                                                                                                                                                                                                      |                      | 24 VDC ±10 %, max. 1.8 W   |
| Operating conditions                                 | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP30                                                                                                                                                       |                      |                            |
| Display                                              | LCD display featuring an RGB backlight with adjustable color                                                                                                                                                                  |                      |                            |
| Interfaces, sensors                                  | 1 x RS-485 (ANSI TIA/EIA-485):<br>Modbus RTU (Slave),<br>adjustable bus speed 1 200 – 115 200 bit/s (typical 57 600 bit/s), configurable transmission mode (typical “8E1”, 1 start bit, 8 data bits, even parity, 1 stop bit) |                      |                            |
|                                                      | 1 x NFC (Near Field Communication)                                                                                                                                                                                            |                      |                            |
|                                                      | 1 x Buzzer                                                                                                                                                                                                                    |                      |                            |
|                                                      | 1 x Internal temperature sensor                                                                                                                                                                                               |                      |                            |
|                                                      | 1 x Internal relative humidity sensor                                                                                                                                                                                         |                      |                            |
|                                                      | 3 x Digital Input for connection of standard switches and pushbuttons                                                                                                                                                         |                      |                            |
|                                                      | 1 x Universal Input, configurable either for L-TEMP2 (NTC temperature sensor)<br>or for connection of standard switches and pushbuttons                                                                                       |                      |                            |
|                                                      | 1 x Infrared receiver                                                                                                                                                                                                         |                      |                            |
|                                                      | –                                                                                                                                                                                                                             | 1 x Occupancy sensor |                            |
|                                                      | –                                                                                                                                                                                                                             |                      | 1 x CO <sub>2</sub> sensor |
| Buttons<br>(capacitive touch)                        | LSTAT-80x-Gx-Lxx1: 4 x Button with temperature up/down, occupancy, and menu                                                                                                                                                   |                      |                            |
|                                                      | LSTAT-80x-Gx-Lxx2: 6 x Button with temperature up/down, fan up/down, occupancy, and menu                                                                                                                                      |                      |                            |
|                                                      | LSTAT-80x-Gx-Lxx3: 8 x Button with temperature up/down, fan up/down, light on/off, occupancy, and menu                                                                                                                        |                      |                            |
|                                                      | LSTAT-80x-Gx-Lxx4: 8 x Button with temperature up/down,<br>sunblinds up/down, light on/off, occupancy, and menu                                                                                                               |                      |                            |
|                                                      | LSTAT-80x-Gx-Lxx5: 8 x Button with temperature up/down, fan up/down,<br>sunblinds up/down, occupancy, and menu                                                                                                                |                      |                            |
|                                                      | LSTAT-80x-Gx-Lxx6: 8 x Button with temperature up/down, fan up/down, sunblinds up/down, light, and menu                                                                                                                       |                      |                            |
| For use with                                         | L-INX, LIOB-AIR, L-ROC Controller, Third party controller with Modbus Master via Modbus RTU                                                                                                                                   |                      |                            |
| Specifications of the sensors                        |                                                                                                                                                                                                                               |                      |                            |
| Temperature measurement                              | Sensor type: CMOS, range: -40 – 125 °C, resolution: 0.1 °C, accuracy: ±0.5 °C (5 – 60 °C)                                                                                                                                     |                      |                            |
| Relative Humidity (R.H.)                             | Sensor type: capacitive humidity sensor, range: 0 % – 100 % R.H., resolution: 0.1 % R.H., accuracy:<br>±2 % R.H. @ 25 °C, 20 % – 80 % R.H.<br>±3 % R.H. @ 25 °C, 0 % – 20 % R.H. and 80 % – 100 % R.H., respectively          |                      |                            |
| Infrared occupancy detector, maximum detection range | 5 m, 64 zones, opening angle horizontal: 94°, vertical: 82°, difference in temperature: target to environment: > 4 °C                                                                                                         |                      |                            |
| CO <sub>2</sub>                                      | 0 – 2 000 ppm, ±30 ppm or ±3 %                                                                                                                                                                                                |                      |                            |
| Infrared receiver                                    | NEC protocol (Apple Remote compatible)                                                                                                                                                                                        |                      |                            |

LSTAT-80x-CUSTOM



# LSTAT-800, LSTAT-801, LSTAT-802

## L-STAT Button Configuration Overview

L-STAT-80x-G3-L1



L-STAT-80x-G3-L2



L-STAT-80x-G3-L3



L-STAT-80x-G3-L4




L-STAT-80x-G3-L5




L-STAT-80x-G3-L6




L-STAT-80x-G3-L201

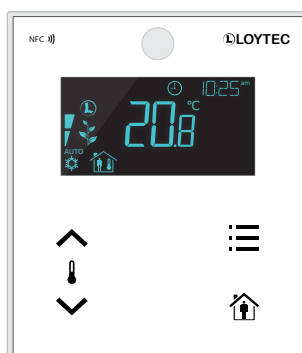

L-STAT-80x-G3-L202

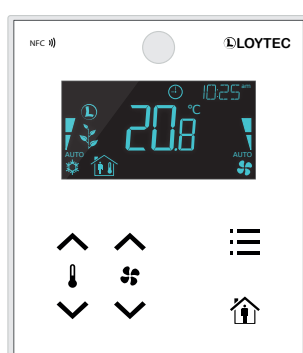

L-STAT-80x-G3-L203

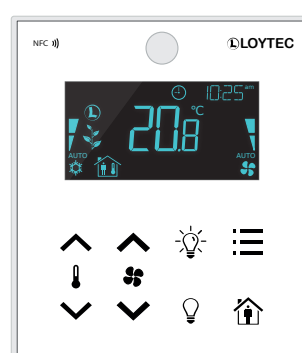


L-STAT-80x-G3-L204



L-STAT-80x-G3-L205



L-STAT-80x-G3-L206

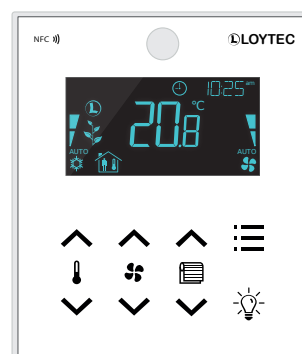

## LSTAT-800, LSTAT-801, LSTAT-802

| Order number                                                                                                                  | Product description                                                                                                                                                                                                      |
|-------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LSTAT-800-G3-L1                                                                                                               | Network Thermostat, black front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, IR receiver, Buttons (L1): temperature up_down/occupancy/menu                                                |
| LSTAT-800-G3-L2                                                                                                               | Network Thermostat, black front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, IR receiver, Buttons (L2): temperature up_down/fan up_down/occupancy/menu                                    |
| LSTAT-800-G3-L3                                                                                                               | Network Thermostat, black front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, IR receiver, Buttons (L3): temperature up_down/fan up_down/light on_off/occupancy/menu                       |
| LSTAT-800-G3-L4                                                                                                               | Network Thermostat, black front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, IR receiver, Buttons (L4): temperature up_down/sunblinds up_down/light on_off/occupancy/menu                 |
| LSTAT-800-G3-L5                                                                                                               | Network Thermostat, black front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, IR receiver, Buttons (L5): temperature up_down/fan up_down/sunblinds up_down/occupancy/menu                  |
| LSTAT-800-G3-L6                                                                                                               | Network Thermostat, black front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, IR receiver, Buttons (L6): temperature up_down/fan up_down/sunblinds up_down/light/menu                      |
| LSTAT-801-G3-L1                                                                                                               | Network Thermostat, front black, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, Buttons (L1): temperature up_down/occupancy/menu                                     |
| LSTAT-801-G3-L2                                                                                                               | Network Thermostat, front black, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, Buttons (L2): temperature up_down/fan up_down/occupancy/menu                         |
| LSTAT-801-G3-L3                                                                                                               | Network Thermostat, front black, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, Buttons (L3): temperature up_down/fan up_down/light on_off/occupancy/menu            |
| LSTAT-801-G3-L4                                                                                                               | Network Thermostat, front black, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, Buttons (L4): temperature up_down/sunblinds up_down/light on_off/occupancy/menu      |
| LSTAT-801-G3-L5                                                                                                               | Network Thermostat, front black, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, Buttons (L5): temperature up_down/fan up_down/sunblinds up_down/occupancy/menu       |
| LSTAT-801-G3-L6                                                                                                               | Network Thermostat, front black, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, Buttons (L6): temperature up_down/fan up_down/sunblinds up_down/light/menu           |
| LSTAT-802-G3-L1                                                                                                               | Network Thermostat, front black, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, CO2, Buttons (L1): temperature up_down/occupancy/menu                                |
| LSTAT-802-G3-L2                                                                                                               | Network Thermostat, front black, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, CO2, Buttons (L2): temperature up_down/fan up_down/occupancy/menu                    |
| LSTAT-802-G3-L3                                                                                                               | Network Thermostat, front black, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, CO2, Buttons (L3): temperature up_down/fan up_down/light on_off/occupancy/menu       |
| LSTAT-802-G3-L4                                                                                                               | Network Thermostat, front black, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, CO2, Buttons (L4): temperature up_down/sunblinds up_down/light on_off/occupancy/menu |
| LSTAT-802-G3-L5                                                                                                               | Network Thermostat, front black, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, CO2, Buttons (L5): temperature up_down/fan up_down/sunblinds up_down/occupancy/menu  |
| LSTAT-802-G3-L6                                                                                                               | Network Thermostat, front black, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, CO2, Buttons (L6): temperature up_down/fan up_down/sunblinds up_down/light/menu      |
| LSTAT-80x-CUSTOM                                                                                                              | Customized Network Thermostat, minimum quantity 100 pieces, enclosure G1: grey, G2: black, G3: white; custom print Lx, including 2 working samples, lead time 10 weeks                                                   |
| L-RC1                                                                                                                         | Infrared remote control for room automation applications                                                                                                                                                                 |
| A complete list of L-STAT models is available on our website <a href="http://www.loytec.com/lstat">www.loytec.com/lstat</a> . |                                                                                                                                                                                                                          |

## L-STAT Network Thermostat

### LSTAT-800, LSTAT-801, LSTAT-802

| Order number                                                                                                                  | Product description                                                                                                                                                                                                      |
|-------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LSTAT-800-G3-L201                                                                                                             | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, IR receiver, Buttons (L1): temperature up_down/occupancy/menu                                                |
| LSTAT-800-G3-L202                                                                                                             | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, IR receiver, Buttons (L2): temperature up_down/fan up_down/occupancy/menu                                    |
| LSTAT-800-G3-L203                                                                                                             | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, IR receiver, Buttons (L3): temperature up_down/fan up_down/light on_off/occupancy/menu                       |
| LSTAT-800-G3-L204                                                                                                             | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, IR receiver, Buttons (L4): temperature up_down/sunblinds up_down/light on_off/occupancy/menu                 |
| LSTAT-800-G3-L205                                                                                                             | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, IR receiver, Buttons (L5): temperature up_down/fan up_down/sunblinds up_down/occupancy/menu                  |
| LSTAT-800-G3-L206                                                                                                             | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, IR receiver, Buttons (L6): temperature up_down/fan up_down/sunblinds up_down/light/menu                      |
| LSTAT-801-G3-L201                                                                                                             | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, Buttons (L1): temperature up_down/occupancy/menu                                     |
| LSTAT-801-G3-L202                                                                                                             | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, Buttons (L2): temperature up_down/fan up_down/occupancy/menu                         |
| LSTAT-801-G3-L203                                                                                                             | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, Buttons (L3): temperature up_down/fan up_down/light on_off/occupancy/menu            |
| LSTAT-801-G3-L204                                                                                                             | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, Buttons (L4): temperature up_down/sunblinds up_down/light on_off/occupancy/menu      |
| LSTAT-801-G3-L205                                                                                                             | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, Buttons (L5): temperature up_down/fan up_down/sunblinds up_down/occupancy/menu       |
| LSTAT-801-G3-L206                                                                                                             | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, Buttons (L6): temperature up_down/fan up_down/sunblinds up_down/light/menu           |
| LSTAT-802-G3-L201                                                                                                             | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, CO2, Buttons (L1): temperature up_down/occupancy/menu                                |
| LSTAT-802-G3-L202                                                                                                             | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, CO2, Buttons (L2): temperature up_down/fan up_down/occupancy/menu                    |
| LSTAT-802-G3-L203                                                                                                             | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, CO2, Buttons (L3): temperature up_down/fan up_down/light on_off/occupancy/menu       |
| LSTAT-802-G3-L204                                                                                                             | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, CO2, Buttons (L4): temperature up_down/sunblinds up_down/light on_off/occupancy/menu |
| LSTAT-802-G3-L205                                                                                                             | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, CO2, Buttons (L5): temperature up_down/fan up_down/sunblinds up_down/occupancy/menu  |
| LSTAT-802-G3-L206                                                                                                             | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, CO2, Buttons (L6): temperature up_down/fan up_down/sunblinds up_down/light/menu      |
| LSTAT-80x-CUSTOM                                                                                                              | Customized Network Thermostat, minimum quantity 100 pieces, enclosure G1: grey, G2: black, G3: white; custom print Lx, including 2 working samples, lead time 10 weeks                                                   |
| L-RC1                                                                                                                         | Infrared remote control for room automation applications                                                                                                                                                                 |
| A complete list of L-STAT models is available on our website <a href="http://www.loytec.com/lstat">www.loytec.com/lstat</a> . |                                                                                                                                                                                                                          |





# L-DALI Lighting Control



## L-DALI Lighting Control


# L-DALI Overview

The L-DALI product line offers DALI lighting controls functionality that leaves nothing to be desired in combination with powerful lighting applications. This allows an incorporation of the DALI system in the superior building automation system and an integration of the lighting system in the remaining automation system for realizing a full-integrated room automation solution.

L-DALI controllers are multifunctional devices featuring DALI light control and gateway functionality between DALI (Digital Addressable Lighting Interface) and LonMark Systems, BACnet or Modbus Networks. Besides the integration of DALI ballasts they likewise support DALI pushbutton couplers e.g. LDALI-BM2 and also a variety of multi sensors like the LDALI-MS2. With the LDALI-RM3 Relay Module, standard loads in the power grid can be controlled via DALI. EnOcean push buttons and multi-sensors can be integrated using the optional L-ENO extension modules. With the LSMI-804 extension module SMI sunblinds on up to four SMI channels can be integrated in the lighting application.

The built-in web server allows for device configuration, DALI system configuration and maintenance. L-DALI controllers feature alarming, scheduling, trending (AST™) and e-mail notification functionality.

Additional features include data exchange via global connections (network-wide data exchange), a built-in DALI buspower supply (selected models only) which can also power a DALI channel, and a 128x64 graphical display for manual operation using a jog dial.

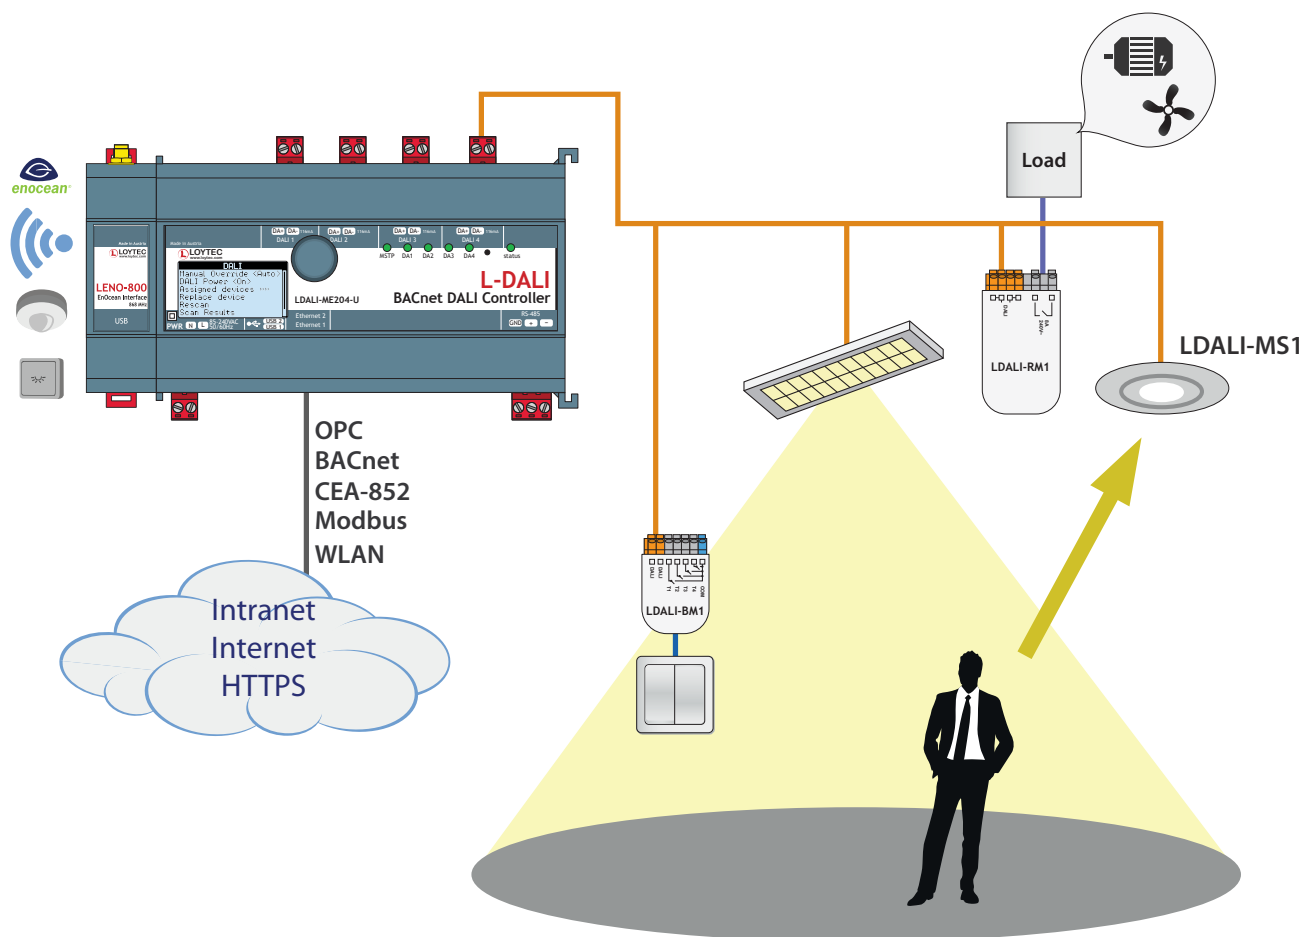

# LDALI-3E101-U, LDALI-3E102-U, LDALI-3E104-U

Datasheet #89016919



CEA-709 DALI Controller



L-DALI Controllers are multifunctional devices combining constant light control, sunblind control, and gateway functions between LonMark and DALI (Digital Addressable Lighting Interface) systems. With Alarming, Scheduling, Trending, and e-mail notification (AST™) the L-DALI Controller is a perfect solution for DALI lighting systems and for a smooth DALI integration into LonMark Systems.

## Built-In or External DALI Power Supply

The LDALI-3E101-U comes with a built-in DALI power supply. It can supply one DALI channel with a guaranteed supply current of 230 mA. The DALI bus power can be switched on and off via web interface or LCD UI.

Thanks to the switching power supply, these devices can handle input voltages from 85 – 240 V AC, 50/60 Hz. The LDALI-3E102-U and LDALI-3E104-U need an external DALI power supply to power up the DALI network. External power supplies are available for up to four DALI channels.

## LonMark TP/FT-10 or Ethernet/IP-852 Connection

The L-DALI Controllers provide connectivity in LonMark Systems through IP-852, or TP/FT-10 as well as data exchange through Global Connections. They support comprehensive AST™ functionality (Alarming, Scheduling, and Trending) with e-mail notification. Full L-WEB integration is supported as well. The L-DALI Controllers are equipped with two Ethernet ports including a built-in Ethernet switch.

## Local Operation and Override

The L-DALI Controllers come with a built-in backlit display (128x64) and a jog dial for local operation and override. Using the local operation, maintenance tasks (DALI device replacement, burn-in mode, etc.) can be executed without the need of any software tool.

## Constant Light Control

The integrated Constant Light Controller (LonMark Functional Profile #3050) allows controlling local DALI ballasts and luminaires via the CEA-709 network. It supports various lighting control strategies, presence and lux level based. Several parameters can be used to configure the Constant Light Controller for almost any use case.

## Sunblind Control with Constant Light Control Interaction

The integrated Sunblind Controller (LonMark Functional Profile #6111) allows intelligent controlling of blinds connected via SMI (requires LSMI-804) or the CEA-709 network. It offers effective sun and anti-glare protection through active slat control and slat adjustment according to the sun position. Energy efficiency is ensured by linking room occupancy with sun protection. If a room is unoccupied, the L-DALI Controller opens or closes the sunblinds depending on the thermal requirements. This allows for instance to use the heat of the sun for heating in winter while in summer, the heat from the sun is reduced by the closed blinds to reduce the cooling load.

Optionally, the sunblind and light control applications of a room or an area can be linked together. As both applications control the light available in the room this holistic approach assures maximum comfort and energy efficiency.

In addition to the constant light and sunblind control, any mathematical calculation and function or logical operation (Boolean algebra) can be created on the device and process all available data points.

## Device Configuration via Tool or Web Interface

The device configuration, commissioning, and parameterization is done either with the configuration tool software (used as stand-alone tool or as LNS® plug-in) or via the integrated web server.





# LDALI-3E101-U, LDALI-3E102-U, LDALI-3E104-U

- Lamp Actuator #3040
- Occupancy Sensor #1060
- Constant Light Controller #3050
- Light Sensor #1010
- Sunblind Controller #6111
- Open Loop Sensor (button) #1


All data points are available in a tree structure on the integrated web server to be displayed or set using a web browser.

## Features

- DALI integration into LonMark Systems
- Supports up to 64 DALI ballasts and 16 DALI groups per DALI channel
- Supports up to 16 DALI sensors per DALI channel
- Supports up to 64 DALI push buttons per DALI channel
- Integrated DALI bus power supply, can be switched off, 16 VDC, 230 mA guaranteed supply current, 250 mA max. supply current (LDALI-3E101-U only)
- Manual operation using the jog dial and local access to information about device status and data points in clear text and symbols
- 128x64 graphic display with backlight
- Built-in web server for device configuration
- Test and assignment of DALI devices via the web interface
- Replacement of DALI devices without additional software tools via LCD and jog dial
- Supports the control of standard loads in the power grid via LDALI-RM1/LDALI-RM3 Relay Modules
- Integrated Constant Light Controller
- Integrated Sunblind Controller
- Supports lamp burn-in mode
- Supports periodic testing of DALI emergency lights
- Integrated DALI Protocol Analyzer
- Compliant with CEA-709, CEA-852 and ISO/IEC 14908-1 standard (LonMark System)
- Network connection either with TP/FT-10 or IP-852 (CEA-852 Ethernet)
- Alarming, Scheduling, and Trending (AST™) locally or embedded in L-WEB (building management)
- Event-driven e-mail notification
- Supports Local and Global Connections
- Built-in OPC XML-DA and OPC UA server
- Stores customized graphical pages
- Visualization of customized graphical pages through LWEB-900 (building Management), LWEB-803 (Monitoring and Control), or LWEB-802 (Web Browser)
- Stores user-defined project documentation
- Dual switched or separated Ethernet ports
- Modbus TCP (Master or Slave)
- Supports SMI (Standard Motor Interface) through LSMI-804
- Connection to EnOcean wireless devices via LENO-80x Interface
- Supports WLAN through LWLAN-800 Interface

## CEA-709/DALI Controller

# LDALI-3E101-U, LDALI-3E102-U, LDALI-3E104-U

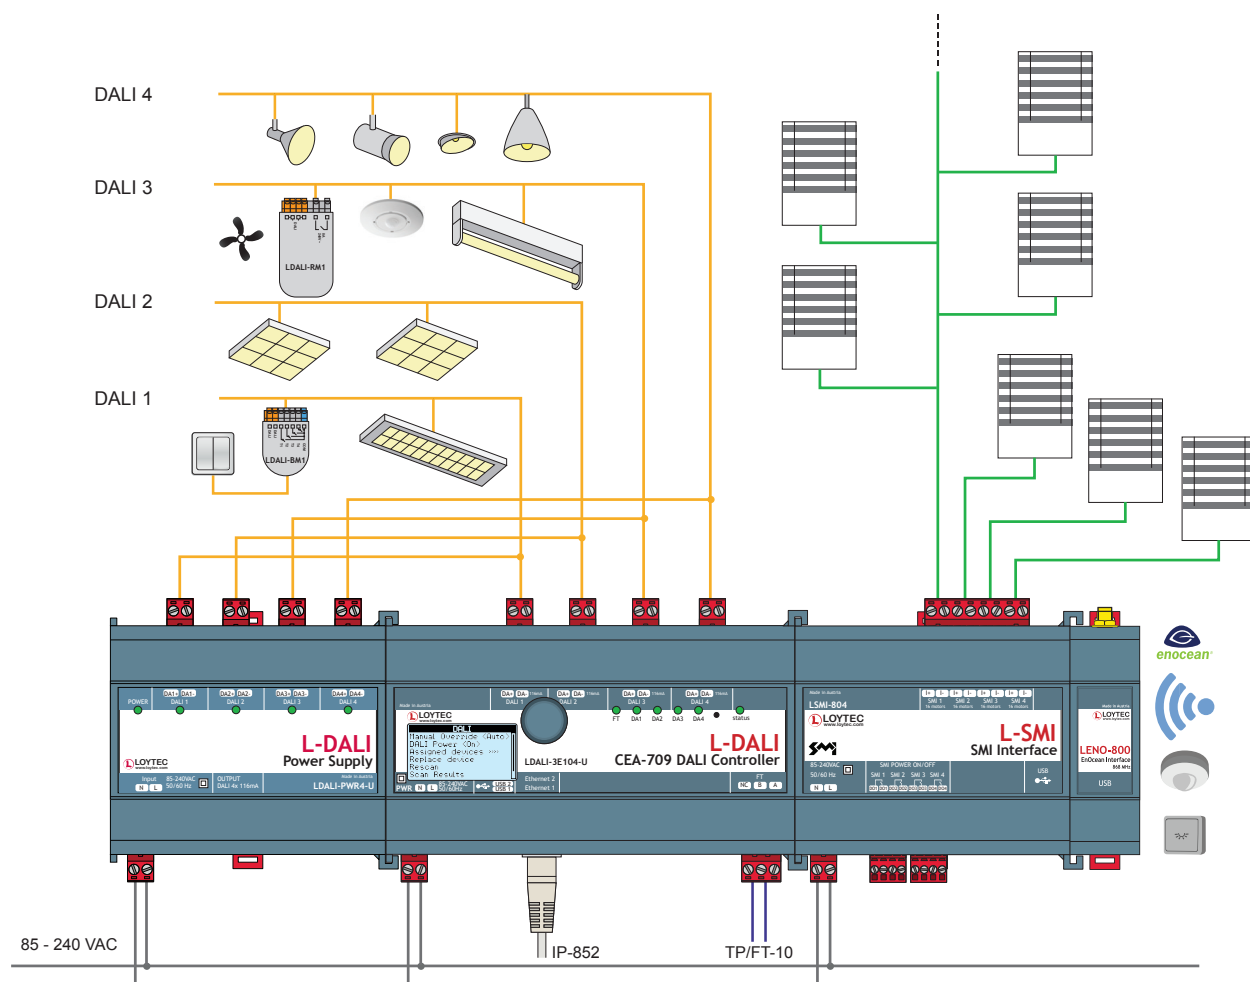

### Specifications

| Type                 | LDALI-3E101-U                                                                                                                                                                                                                                                                                     | LDALI-3E102-U | LDALI-3E104-U         |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------|
| Dimensions (mm)      | 159 x 100 x 75 (L x W x H), DIM035                                                                                                                                                                                                                                                                |               |                       |
| Installation         | DIN rail mounting following DIN 43880, top hat rail EN 50022                                                                                                                                                                                                                                      |               |                       |
| Power supply         | 85-240 V AC, 50/60 Hz, typ. 7.5 W                                                                                                                                                                                                                                                                 |               | 85-240 V AC, 50/60 Hz |
| Operating conditions | 0 °C to 40 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals)                                                                                                                                                                                                         |               |                       |
| DALI channels        | 1 with integrated DALI bus power supply 16 V DC, 230 mA guaranteed supply current, 250 mA max. supply current                                                                                                                                                                                     | 2             | 4                     |
| Interfaces           | 2 x Ethernet (100Base-T):<br>OPC XML-DA, OPC UA,<br>LonMark IP-852*, Modbus TCP, HTTP, FTP, SSH, HTTPS, Firewall, VNC, SNMP<br>1 x TP/FT-10* (LonMark system)<br>2 x USB-A:<br>WLAN (needs LWLAN-800),<br>EnOcean (needs LENO-80x)<br>SMI (needs LSMI-804)<br>* Either LonMark IP-852 or TP/FT-10 |               |                       |
| LonMark Profile      | Lamp Actuator #3040,<br>Light Sensor #1010,<br>Occupancy Sensor #1060,<br>Constant Light Controller #3050,<br>Sunblind Controller #6111<br>Open loop sensor (button) #1                                                                                                                           |               |                       |
| Tools                | L-INX Configurator, and configuration via web interface                                                                                                                                                                                                                                           |               |                       |

## LDALI-3E101-U, DALI-3E102-U, LDALI-3E104-U

| Resource limits                    |                                                                                                                        |                           |                                  |
|------------------------------------|------------------------------------------------------------------------------------------------------------------------|---------------------------|----------------------------------|
| DALI ballasts per DALI channel     | 64                                                                                                                     | LonMark calendars         | 1 (10 patterns) per DALI channel |
| DALI groups per DALI channel       | 16                                                                                                                     | LonMark schedulers        | 16 per DALI channel              |
| DALI sensors per DALI channel      | 16                                                                                                                     | LonMark alarm servers     | 1 per DALI channel               |
| DALI push buttons per DALI channel | 64                                                                                                                     | Trend logs                | 512 (4 000 000 entries, ≈ 60 MB) |
| Scene control                      | 16 scenes per DALI group                                                                                               | Data points in trend log  | 1 000                            |
| Maths objects                      | 100                                                                                                                    | E-mail templates          | 100                              |
| Alarm logs                         | 10                                                                                                                     | Number of L-WEB clients   | 32 (simultaneously)              |
| OPC data points                    | 10 000                                                                                                                 | Modbus data points        | 2 000                            |
| Connections (Local/Global)         | 2 000 / 250                                                                                                            | Number of EnOcean devices | 100                              |
| Address table entries              | 512 (non-ECS mode: 15)                                                                                                 | EnOcean data points       | 1 000                            |
| SMI devices (per channel)          | 16                                                                                                                     |                           |                                  |
| Order number                       | Product description                                                                                                    |                           |                                  |
| LDALI-3E101-U                      | CEA-709/DALI Controller, AST, Sunblind Controller, 1 DALI channel, integrated DALI power supply                        |                           |                                  |
| LDALI-3E102-U                      | CEA-709/DALI Controller, AST, Sunblind Controller, 2 DALI channels                                                     |                           |                                  |
| LDALI-3E104-U                      | CEA-709/DALI Controller, AST, Sunblind Controller, 4 DALI channels                                                     |                           |                                  |
| LDALI-PWR2-U                       | DALI power supply unit for 2 DALI channels                                                                             |                           |                                  |
| LDALI-PWR4-U                       | DALI power supply unit for 4 DALI channels                                                                             |                           |                                  |
| LDALI-MS1                          | DALI multi-sensor (motion detection, brightness sensor, IR sensor)                                                     |                           |                                  |
| LDALI-MS2                          | DALI multi-sensor (presence detection, lux sensor, IR receiver, temperature sensor, humidity sensor, 3 digital inputs) |                           |                                  |
| LDALI-BM1                          | Quadruple DALI pushbutton coupler                                                                                      |                           |                                  |
| LDALI-BM2                          | Quadruple DALI pushbutton coupler                                                                                      |                           |                                  |
| LDALI-RM1                          | DALI Relay Module 8 A                                                                                                  |                           |                                  |
| LDALI-RM2                          | DALI Relay Module 8 A, Analog Interface 1 – 10 V                                                                       |                           |                                  |
| LDALI-RM3                          | DALI Relay Module 10 A, Analog Interface 0 – 10 V and 1 – 10 V                                                         |                           |                                  |
| LDALI-RM4                          | DALI Relay Module 10 A, Analog Interface 0 – 10 V and 1 – 10 V, “spud-mount”                                           |                           |                                  |
| LENO-800                           | EnOcean Interface 868 MHz Europe                                                                                       |                           |                                  |
| LENO-801                           | EnOcean Interface 902 MHz USA/Canada                                                                                   |                           |                                  |
| LENO-802                           | EnOcean Interface 928 MHz Japan                                                                                        |                           |                                  |
| LWLAN-800                          | Wireless LAN Interface IEEE 802.11 bgn                                                                                 |                           |                                  |
| LSMI-804                           | Standard Motor Interface for 64 motors, 4 SMI channels via USB                                                         |                           |                                  |


## BACnet/DALI Controller

# LDALI-ME204-U, LDALI-ME201-U

Datasheet #89021219

✓ BACnet  
CEA-709  
✓ Modbus

✓ DALI  
✓ OPC

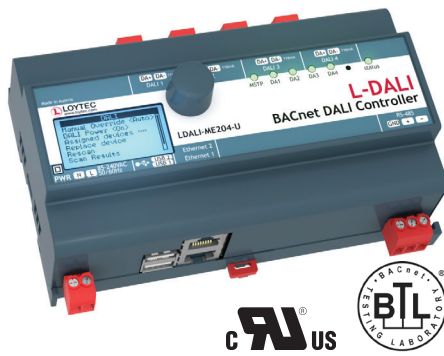

L-DALI Controllers are multifunctional devices combining constant light control, sunblind control and gateway functions between DALI (Digital Addressable Lighting Interface) and BACnet or Modbus systems. With Alarming, Scheduling, Trending and e-mail notification (AST™) the L-DALI Controller is a perfect solution for DALI lighting systems and for a smooth DALI integration into BACnet or Modbus networks.

### Built-In or External DALI Power Supply

The LDALI-ME201-U comes with a built-in DALI power supply. It can supply one DALI channel with a guaranteed supply current of 230 mA. The DALI bus power can be switched on and off via web interface or LCD UI.

Thanks to the switching power supply, the device can handle input voltages from 85 – 240 V AC, 50/60 Hz. The LDALI-ME204-U needs an external DALI power supply to power up the DALI network. Power supplies are available for up to four channel DALI networks.

### BACnet Connectivity

The L-DALI Controllers feature connectivity in BACnet networks via BACnet/IP or BACnet MS/TP. They also provide data exchange through Global Connections and support comprehensive AST™ functionality (Alarming, Scheduling, and Trending). Full L-WEB integration is supported as well. The L-DALI Controllers are equipped with two Ethernet ports including a built-in Ethernet switch.

### Local Operation and Override

The L-DALI Controllers come with a built-in backlit display (128x64) and a jog dial for local operation and override. Using the local operation, maintenance tasks (DALI device replacement, burn-in mode, etc.) can be executed without the need of any software tool.

### Constant Light Control

The integrated Constant Light Controller works with DALI and with BACnet devices. It supports various lighting control strategies, presence and lux level based. Several parameters can be used to configure the Constant Light Controller for almost any use case.

### Sunblind Control with Constant Light Control Interaction

The integrated Sunblind Controller application allows intelligent controlling of blinds connected via SMI (requires LSMI-804). It offers effective sun and anti-glare protection through active slat control and slat adjustment according to the sun position. Energy efficiency is ensured by linking room occupancy with sun protection. If a room is unoccupied, the L-DALI Controller opens or closes the sunblinds depending on the thermal requirements. This allows for instance to use the heat of the sun for heating in winter while in summer, the heat from the sun is reduced by the closed blinds to reduce the cooling load.

Optionally, the sunblind and light control applications of a room or an area can be linked together. As both applications control the light available in the room this holistic approach assures maximum comfort and energy efficiency.

In addition to the constant light and sunblind control, any mathematical calculation and function or logical operation (Boolean algebra) can be created on the device and process all available data points.

### Device Configuration via Tool or Web Interface

The device configuration, commissioning, and parameterization is done either with the configuration tool software or via the integrated web server.

### EnOcean, OPC and Modbus

EnOcean sensors and buttons can be integrated via the optional L-ENO EnOcean



# LDALI-ME204-U, LDALI-ME201-U

interface. To use the L-DALI with an existing SCADA solution all run-time values and parameters can be accessed via BACnet, OPC (XML/DA and UA) and Modbus TCP.

## Advanced DALI Functions

### • DALI Sensors

The L-DALI Controllers support the integration of DALI multi-sensors for presence detection and light level recognition. In addition to the LOYTEC DALI multi-sensor LDALI-MS2, DALI sensors of well-known manufacturers can be selected from a list of tested devices.

### • DALI Push Button

For manual operation, DALI push button coupler and IR remote controls can be integrated into the system. Their functionality can be configured individually. In addition to controlling lighting via DALI (dimming, scene recall, etc.) also commands can be sent into the building network with a single keystroke.

### • DALI Relay Modules

Standard loads in the power grid can be controlled via DALI using DALI Relay Modules.

### • Auto Burn-In for Fluorescent Lamps

Fluorescent lamps must be operated about 100 hours with 100 % brightness before they may be dimmed. This burn-in process is monitored by L-DALI for each lamp. After 100 hours burn-in time, the lamp's constant light control is enabled.

### • Automatic Test of Emergency Lighting Systems

In DALI emergency lighting systems, L-DALI can be used for testing the system. The results can be logged.

### • Collection of Important Operational Parameters

For maximum transparency in the lighting system, L-DALI can record the operating hours of each lamp and also the energy consumption (calculated).

### • DALI Device Replacement made Easy

Defective DALI ballasts can easily be replaced directly on the L-DALI Controller (LCD and jog dial) or via the web interface. No software tool is necessary.

## Smooth DALI Integration into BACnet and Modbus Networks

The L-DALI Controller maps information from the DALI network to BACnet objects or Modbus registers that are used to control DALI ballasts or to display operating states.


### DALI Network Interface

L-DALI represents a DALI-Master in the DALI network which can interact with selected DALI multi-sensors in Multi-Master mode. The LDALI-ME204-U device is equipped with 4 independent DALI channels. The LDALI-ME201-U device is equipped with 1 DALI channel. Up to 64 DALI-based luminaries per DALI channel can be controlled individually or via 16 groups. All luminaries are monitored for lamp or ballast defect.

### BACnet Interface

The following BACnet server objects are supported:

- Analog Output objects to control DALI ballasts, groups, and channels
- Multi-State Output objects for scene control of DALI groups and channels
- Analog Input objects providing feedback from DALI ballast, groups, and

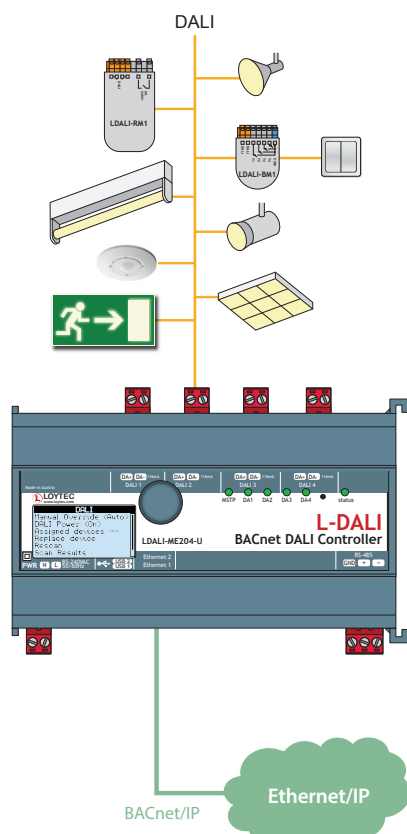


## LDALI-ME204-U, LDALI-ME201-U

channels

- Analog Input objects providing status information from DALI groups and channels
- Accumulator objects providing estimated energy usage of DALI groups and channels
- Multi-State Output objects to issue commands (start/stop emergency test or burn-in, change color temperature, etc.) to DALI ballasts, groups and channels
- Analog Input objects providing battery status of emergency ballasts, groups
- Analog Input objects providing lux level information from supported DALI sensors
- Binary Input objects providing occupancy information from supported DALI sensors
- Loop objects providing constant light controller functionality
- Binary Input objects providing button information from supported DALI buttons
- Various objects to control sunblinds

All data points are available on the web server in a tree structure and can be displayed and set via a web browser.

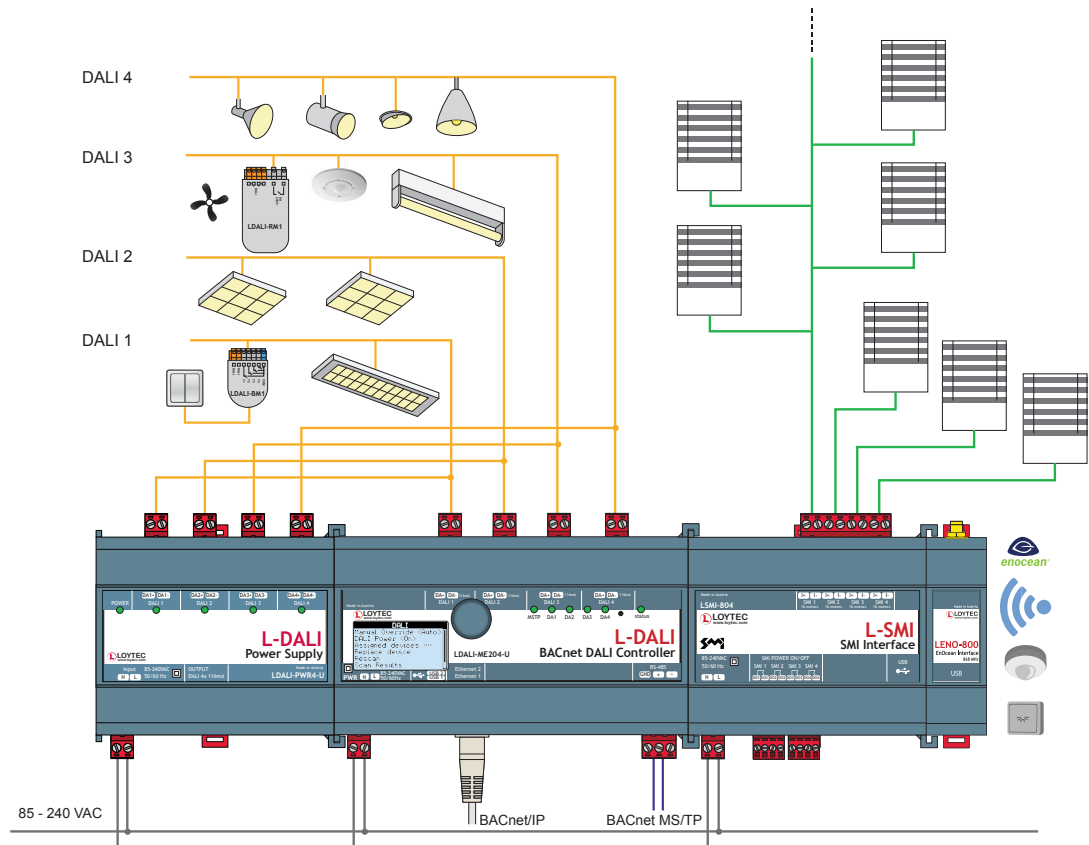

## LDALI-ME204-U, LDALI-ME201-U

## Features

- DALI integration into BACnet networks
- Supports up to 64 DALI ballasts and 16 DALI groups per DALI channel
- Supports up to 16 DALI sensors per DALI channel
- Supports up to 64 DALI push buttons per DALI channel
- Integrated DALI bus power supply, 16 VDC, 230 mA guaranteed supply current, 250 mA max. supply current (LDALI-ME201-U only)
- Manual operation using the jog dial and local access to information about device status and data points in clear text and symbols
- 128x64 graphic display with backlight
- Built-in web server for device configuration
- Test and assignment of DALI devices on the web interface
- Replacement of DALI devices without additional software tools via LCD and jog dial
- Supports the control of standard loads in the power grid via LDALI-RM1/LDALI-RM3 Relay Modules
- Integrated Constant Light Controller
- Integrated Sunblind Controller
- Supports lamp burn-in mode
- Supports periodic testing of DALI emergency lights
- Integrated DALI Protocol Analyzer
- Compliant with ANSI/ASHRAE 135-2012 and ISO 16484-5:2012 standard
- Supports BACnet/IP or BACnet MS/TP
- BACnet Client Function (Write Property, Read Property, COV Subscription)
- B-BC (BACnet Building Controller) functionality, BTL certified
- Alarming, Scheduling, and Trending (AST™) locally or embedded in L-WEB (building management)
- Event-driven e-mail notification
- Supports Local and Global Connections
- Built-in OPC XML-DA and OPC UA server
- Stores customized graphical pages
- Visualization of customized graphical pages through LWEB-900 (building Management), LWEB-803 (Monitoring and Control), or LWEB-802 (Web Browser)
- Stores user-defined project documentation
- Dual switched or separated Ethernet ports
- Modbus TCP (Master or Slave)
- Supports SMI (Standard Motor Interface) through LSMI-804
- Connection to EnOcean wireless devices via LENO-80x Interface
- Supports WLAN through LWLAN-800 Interface


## Specifications

| Type                 | LDALI-ME204-U                                                                                                                                                                                                                                                                                                      | LDALI-ME201-U                                                                                                |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| Dimensions (mm)      | 159 x 100 x 75 (L x W x H), DIM035                                                                                                                                                                                                                                                                                 |                                                                                                              |
| Installation         | DIN rail mounting following DIN 43880, top hat rail EN 50022                                                                                                                                                                                                                                                       |                                                                                                              |
| Power supply         | 85-240 V AC, 50/60 Hz                                                                                                                                                                                                                                                                                              | 85-240 V AC, 50/60 Hz, typ. 7.5 W                                                                            |
| Operating conditions | 0 °C to 40 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals)                                                                                                                                                                                                                          |                                                                                                              |
| DALI channels        | 4                                                                                                                                                                                                                                                                                                                  | 1 with integrated DALI bus power supply 16 VDC, 230 mA guaranteed supply current, 250 mA max. supply current |
| Interfaces           | 2 x Ethernet (100Base-T):<br>OPC XML-DA, OPC UA,<br>BACnet/IP*,<br>Modbus TCP,<br>HTTP, FTP, SSH, HTTPS, Firewall, VNC, SNMP<br>1 x RS-485 (ANSI TIA/EIA-485):<br>BACnet MS/TP*<br>2 x USB-A:<br>WLAN (needs LWLAN-800),<br>EnOcean (needs LENO-80x)<br>SMI (needs LSMI-804)<br>* Either BACnet/IP or BACnet MS/TP |                                                                                                              |
| Tools                | L-INX Configurator and configuration via web interface                                                                                                                                                                                                                                                             |                                                                                                              |

## BACnet/DALI Controller

# LDALI-ME204-U, LDALI-ME201-U

| Resource limits                    |                                                                                                                        |                             |                                  |
|------------------------------------|------------------------------------------------------------------------------------------------------------------------|-----------------------------|----------------------------------|
| DALI ballasts per DALI channel     | 64                                                                                                                     | BACnet client mappings      | 1 000                            |
| DALI groups per DALI channel       | 16                                                                                                                     | BACnet scheduler objects    | 100                              |
| DALI sensors per DALI channel      | 16                                                                                                                     | BACnet calendar objects     | 25                               |
| DALI push buttons per DALI channel | 64                                                                                                                     | BACnet notification classes | 32                               |
| Scene control                      | 16 scenes per DALI group                                                                                               | Trend logs                  | 512 (4 000 000 entries, ≈ 60 MB) |
| Math objects                       | 100                                                                                                                    | Data points in trend log    | 1 000                            |
| Alarm logs                         | 10                                                                                                                     | E-mail templates            | 100                              |
| OPC data points                    | 10 000                                                                                                                 | Modbus data points          | 2 000                            |
| Connections (Local/Global)         | 2 000 / 250                                                                                                            | Number of EnOcean devices   | 100                              |
| Number of L-WEB clients            | 32 (simultaneously)                                                                                                    | EnOcean data points         | 1 000                            |
| SMI devices (per channel)          | 16                                                                                                                     |                             |                                  |
| Order number                       | Product description                                                                                                    |                             |                                  |
| LDALI-ME204-U                      | BACnet/DALI Controller, 4 DALI channels                                                                                |                             |                                  |
| LDALI-ME201-U                      | BACnet/DALI Controller, 1 DALI channel, integrated DALI power supply                                                   |                             |                                  |
| LDALI-PWR2-U                       | DALI power supply unit for 2 DALI channels                                                                             |                             |                                  |
| LDALI-PWR4-U                       | DALI power supply unit for 4 DALI channels                                                                             |                             |                                  |
| LDALI-MS1                          | DALI multi-sensor (motion detection, brightness sensor, IR sensor)                                                     |                             |                                  |
| LDALI-MS2                          | DALI multi-sensor (presence detection, lux sensor, IR receiver, temperature sensor, humidity sensor, 3 digital inputs) |                             |                                  |
| LDALI-BM1                          | Quadruple DALI pushbutton coupler                                                                                      |                             |                                  |
| LDALI-BM2                          | Quadruple DALI pushbutton coupler                                                                                      |                             |                                  |
| LDALI-RM1                          | DALI Relay Module 8 A                                                                                                  |                             |                                  |
| LDALI-RM2                          | DALI Relay Module 8 A, Analog Interface 1 – 10 V                                                                       |                             |                                  |
| LDALI-RM3                          | DALI Relay Module 10 A, Analog Interface 0 – 10 V and 1 – 10 V                                                         |                             |                                  |
| LDALI-RM4                          | DALI Relay Module 10 A, Analog Interface 0 – 10 V and 1 – 10 V, "spud-mount"                                           |                             |                                  |
| LENO-800                           | EnOcean Interface 868 MHz Europe                                                                                       |                             |                                  |
| LENO-801                           | EnOcean Interface 902 MHz USA/Canada                                                                                   |                             |                                  |
| LENO-802                           | EnOcean Interface 928 MHz Japan                                                                                        |                             |                                  |
| LWLAN-800                          | Wireless LAN Interface IEEE 802.11bgn                                                                                  |                             |                                  |
| LSMI-804                           | Standard Motor Interface for 64 motors, 4 SMI channels via USB                                                         |                             |                                  |

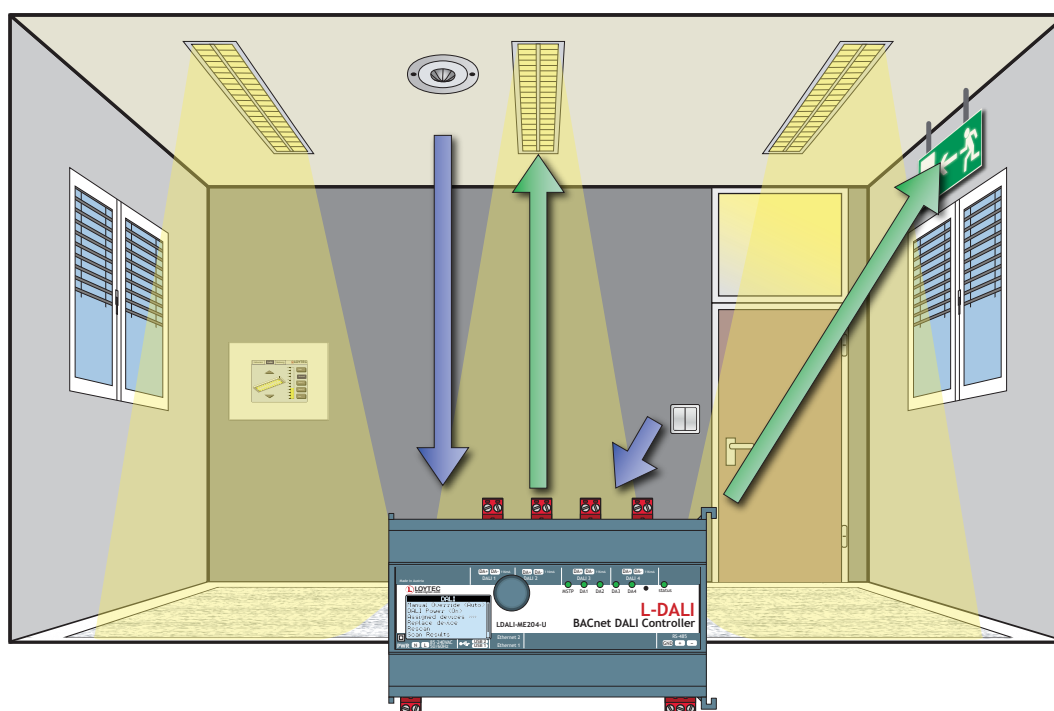



- ✓ BACnet
- ✓ CEA-709
- ✓ KNX
- ✓ DALI
- M-Bus
- ✓ OPC



Datasheet #89055219



The LDALI-PLC4 controllers are powerful, freely programmable lighting controllers, which can be programmed by L-STUDIO. With Alarming, Scheduling, Trending and e-mail notification (AST™) the LDALI-PLC4 controller is a perfect solution for DALI lighting systems with application requirements not covered by the standard application of the non-programmable L-DALI controllers.

### Built-In or External DALI Power Supply

The LDALI-PLC4 Controller needs an external DALI power supply to power up the DALI network. Power supplies are available for single channel or up to four channel DALI networks.

### DALI Network Interface

The LDALI-PLC4 device is equipped with 4 independent DALI channels. Up to 64 DALI-based luminaires per DALI channel can be controlled individually or via 16 groups. All luminaires are monitored for lamp or ballast defect. L-DALI represents a DALI-Master in the DALI network which can interact with selected DALI multi-sensors in Multi-Master mode.

### Local Operation and Override

The L-DALI Controllers come with a built-in backlit display (128x64) and a jog dial for local operation and override. Using the local operation, maintenance tasks (DALI device replacement, burn-in mode, etc.) can be executed without the need of any software tool.

### Freely Programmable

The LDALI-PLC4 can be programmed using the L-STUDIO programming tool. It can be programmed using IEC 61499 for integration into the L-ROC system and IEC 61131 for stand-alone operation.

A library containing standard lighting and sunblind control functionality is available. It supports various lighting control strategies, presence and lux level based. Several parameters can be used to configure the application for almost any use case. User specific program extensions are possible as well.

### Connectivity

The LDALI-PLC4 controller provides connectivity functions to concurrently integrate CEA-709 (LonMark Systems), BACnet, KNX, and Modbus subsystems. LonMark Systems can be integrated via IP-852 (Ethernet/IP). BACnet integration is supported through BACnet/IP (Ethernet/IP) or BACnet MS/TP (RS-485), KNXnet/IP and Modbus TCP via Ethernet/IP.

The gateway functionality allows data communication between all communication technologies available on the device. Different technology data points are mapped through Local Connections on the device. The mapping of different technology data points on distributed devices is supported by Global Connections.

Each LDALI-PLC4 is equipped with two Ethernet ports. It can either be configured to use the internal switch to interconnect the two ports or every port is configured to work in a separate IP network.

When the Ethernet ports are configured for two separate IP networks, one port can be connected for instance to a WAN (Wide Area Network) with enabled network security (HTTPS) while the second port can be configured to be connected to an insecure network (LAN) where the standard building automation protocols like BACnet/IP, LON/IP, or Modbus TCP are present. These devices also feature fire-wall functionality of course to isolate particular protocols or services between the ports.

Using the internal switch, a daisy chained line topology of up to 20 devices can be built, which reduces costs for network installation. The IP switch also allows the setup of a redundant Ethernet installation (ring topology), which increases reliability. The redundant Ethernet topology is enabled by the Rapid Spanning Tree



## LDALI-PLC4

Protocol (RSTP), which is supported by most managed switches.

The LDALI-PLC4 provides fully featured AST™ functionality (Alarming, Scheduling, and Trending) and can be integrated perfectly into the L-WEB System.

### Device Configuration via Tool or Web Interface

The device configuration, commissioning, and parameterization is done either with the configuration tool software or via the integrated web server.

### EnOcean, SMI and LIOB/IP

Wireless EnOcean sensors and buttons can be integrated via the optional L-ENO EnOcean interface. For sunblinds the LSMI-804 extension module allows the integration of up to four SMI channels. Physical I/Os can be integrated through L-IOB I/O Modules via LIOB-IP.

### Advanced DALI Functions

- **DALI Sensors**

The LDALI-PLC4 Controllers support the integration of DALI multi-sensors for presence detection and light level recognition. In addition to the LOYTEC DALI multi-sensor LDALI-MS2, DALI sensors of well-known manufacturers can be selected from a list of tested devices.

- **DALI Push Button**

For manual operation, DALI push button coupler and IR remote controls can be integrated into the system. The function executed when a button is pressed is freely programmable in the program logic.

- **DALI Relay Modules**

Standard loads in the power grid can be controlled via DALI using DALI Relay Modules.

- **Auto Burn-In for fluorescent Lamps**

Fluorescent lamps must be operated about 100 hours with 100 % brightness before they may be dimmed. This burn-in process is monitored by L-DALI for each lamp. After 100 hours burn-in time, the lamp's constant light control is enabled.

- **Automatic Test of Emergency Lighting Systems**

In DALI emergency lighting systems, L-DALI can be used for testing the system. The results can be logged.

- **Collection of important Operational Parameters**

For maximum transparency in the lighting system, L-DALI can record the operating hours of each lamp and also the energy consumption (calculated).

- **DALI Device Replacement made Easy**

Defective DALI ballasts can easily be replaced directly on the L-DALI Controller (LCD and jog dial) or via the web interface. No software tool is necessary.

## Features


- IEC 61131-3 and IEC 61499 programmable with L-STUDIO
- Supports up to 64 DALI ballasts and 16 DALI groups per DALI channel
- Supports up to 16 DALI sensors per DALI channel
- Supports up to 64 DALI push buttons per DALI channel
- Manual operation using the jog dial and local access to information about device status and data points in clear text and symbols
- 128x64 graphic display with backlight
- Built-in web server for device configuration
- Test and assignment of DALI devices on the web interface
- Replacement of DALI devices without additional software tools via LCD and jog dial
- Supports the control of standard loads in the power grid via LDALI-RM1/LDALI-RM3 Relay Modules
- Supports lamp burn-in mode
- Supports periodic testing of DALI emergency lights
- Integrated DALI Protocol Analyzer
- Physical inputs and outputs with L-IOB I/O Modules
- Compliant with CEA-709, CEA-852, and ISO/IEC 14908 Standard (LonMark System)
- Support of dynamically created or static NVs
- Support of user-defined NVs (UNVTs) and Configuration Properties (SCPTs, UCPTs)
- KNXnet/IP
- Gateway functions including Smart Auto-Connect™
- Modbus TCP and Modbus RTU (L-STAT only)
- Compliant with ANSI/ASHRAE 135-2012 and ISO 16484-5:2012 standard
- Supports BACnet/IP or BACnet MS/TP
- BACnet Client Function (Write Property, Read Property, COV Subscription)
- B-BC (BACnet Building Controller) functionality, BTL certified
- Alarming, Scheduling, and Trending (AST™) locally or embedded in L-WEB (building management)
- Event-driven e-mail notification
- Supports Local and Global Connections
- Built-in OPC XML-DA and OPC UA server
- Stores customized graphical pages
- Visualization of customized graphical pages through LWEB-900 (building Management), LWEB-803 (Monitoring and Control), or LWEB-802 (Web Browser)
- Stores user-defined project documentation
- Dual switched or separated Ethernet ports
- Supports SMI (Standard Motor Interface) through LSMI-804
- Connection to EnOcean wireless devices via LENO-80x Interface
- Supports WLAN through LWLAN-800 Interface

## L-STUDIO 3.0 Licenses

| Type               | LDALI-PLC4                                                                                         |
|--------------------|----------------------------------------------------------------------------------------------------|
| Programming, Tools | L-STUDIO (IEC 61131-3 and IEC 61499 based), L-INX Configurator and configuration via web interface |
| License            | L-STUDIO: included<br>L-LOGICAD: n/a                                                               |

# Programmable DALI Controller

## LDALI-PLC4

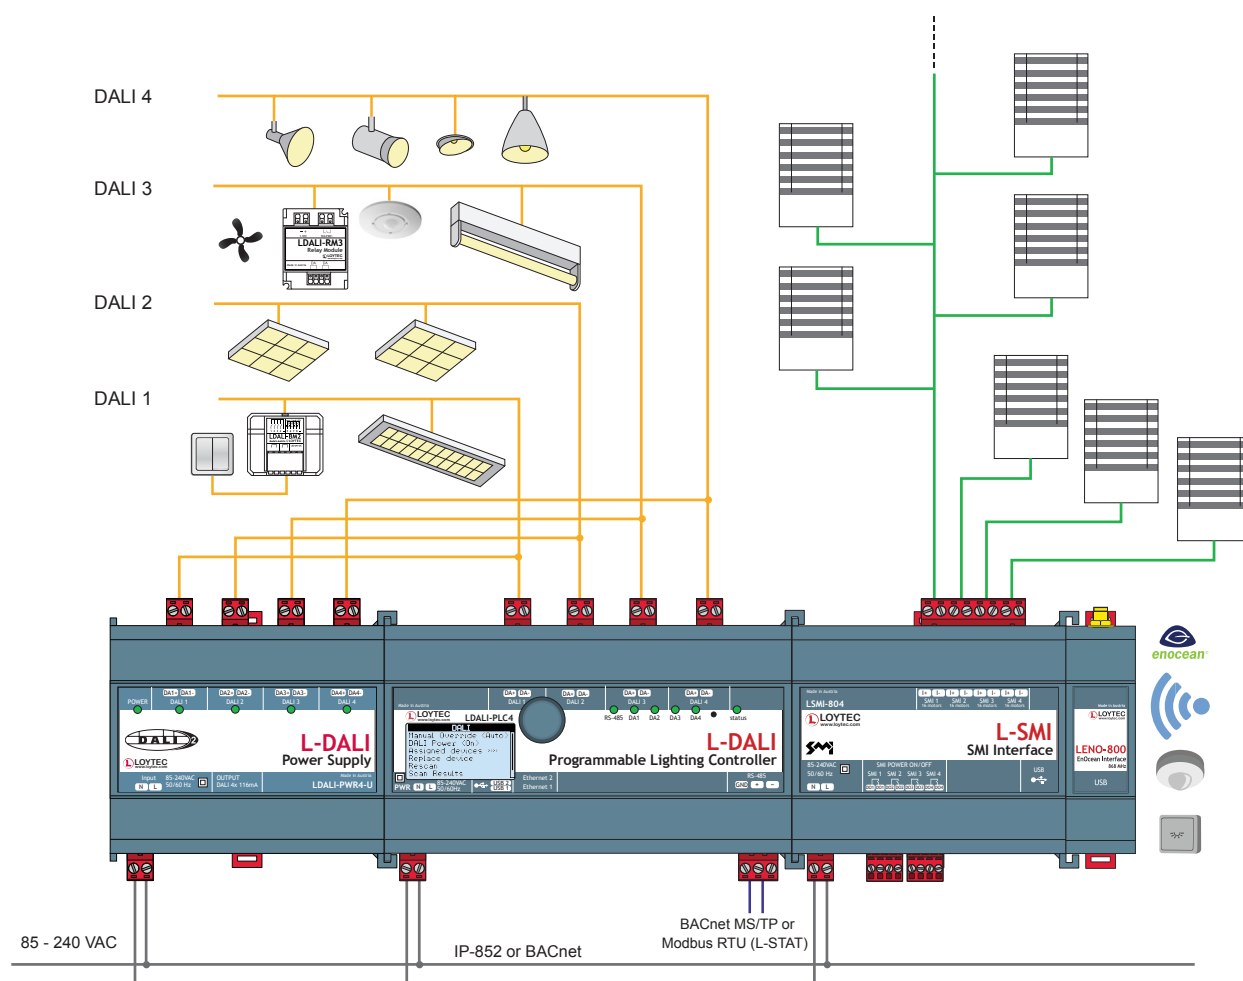

### Specifications


|                                    |                                                                                                                                                                                             |                                                                                                                                                                                  |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type                               | <b>LDALI-PLC4</b>                                                                                                                                                                           |                                                                                                                                                                                  |
| Dimensions (mm)                    | 159 x 100 x 75 (L x W x H), DIM035                                                                                                                                                          |                                                                                                                                                                                  |
| Installation                       | DIN rail mounting following DIN 43880, top hat rail EN 50022                                                                                                                                |                                                                                                                                                                                  |
| Power supply                       | 85-240 V AC, 50/60 Hz                                                                                                                                                                       |                                                                                                                                                                                  |
| Operating conditions               | 0 °C to 40 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals)                                                                                                   |                                                                                                                                                                                  |
| DALI channels                      | 4                                                                                                                                                                                           |                                                                                                                                                                                  |
| Interfaces                         | 2 x Ethernet (100Base-T):<br>OPC XML-DA, OPC UA,<br>LonMark IP-852,<br>BACnet/IP*,<br>LIOB-IP,<br>KNXnet/IP,<br>Modbus TCP (Master or Slave),<br>HTTP, FTP, SSH, HTTPS, Firewall, VNC, SNMP | 1 x RS-485 (ANSI TIA/EIA-485):<br>BACnet MS/TP*,<br>or<br>Modbus RTU (L-STAT only)<br>2 x USB-A:<br>WLAN (needs LWLAN-800),<br>EnOcean (needs LENO-800x)<br>SMI (needs LSMI-804) |
| * Either BACnet/IP or BACnet MS/TP |                                                                                                                                                                                             |                                                                                                                                                                                  |



| Resource limits                 |                                                                                                                                                                        |                              |                     |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------|
| Total number of data points     | 30 000                                                                                                                                                                 | LonMark Alarm Servers        | 1                   |
| OPC data points                 | 10 000                                                                                                                                                                 | E-mail templates             | 100                 |
| BACnet objects                  | 2 000 (analog, binary, multi-state)                                                                                                                                    | Math objects                 | 100                 |
| BACnet client mappings          | 5 000                                                                                                                                                                  | Alarm logs                   | 10                  |
| BACnet calendar objects         | 25                                                                                                                                                                     | KNXnet/IP data points        | 1 000               |
| BACnet scheduler objects        | 100 (64 data points per object)                                                                                                                                        | Connections (Local / Global) | 2 000 / 250         |
| BACnet notification classes     | 32                                                                                                                                                                     | Number of L-WEB clients      | 32 (simultaneously) |
| Trend logs (BACnet or generic)  | 512 (4 000 000 entries, ≈ 60 MB)                                                                                                                                       | L-IOB I/O Modules            | 24                  |
| Total trended data points       | 1 000                                                                                                                                                                  | Number of EnOcean devices    | 100                 |
| CEA-709 network variables (NVs) | 1 000                                                                                                                                                                  | EnOcean data points          | 1 000               |
| CEA-709 Alias NVs               | 2 000                                                                                                                                                                  | DALI Channels                | 4                   |
| CEA-709 External NVs (polling)  | 2 000                                                                                                                                                                  | DALI Ballasts per channel    | 64                  |
| CEA-709 address table entries   | 1 000 (non-ECS mode: 15)                                                                                                                                               | DALI Groups per channel      | 16                  |
| LonMark Calendars               | 1 (25 calendar patterns)                                                                                                                                               | DALI Sensors per channel     | 16                  |
| LonMark Schedulers              | 100                                                                                                                                                                    | DALI Buttons per channel     | 64                  |
| Order number                    | Product description                                                                                                                                                    |                              |                     |
| LDALI-PLC4                      | Freely programmable DALI Controller, 4 DALI channels                                                                                                                   |                              |                     |
| LDALI-PWR2-U                    | DALI power supply unit for 2 DALI channels                                                                                                                             |                              |                     |
| LDALI-PWR4-U                    | DALI power supply unit for 4 DALI channels                                                                                                                             |                              |                     |
| LDALI-MS1                       | DALI multi-sensor (motion detection, brightness sensor, IR sensor)                                                                                                     |                              |                     |
| LDALI-MS2                       | DALI multi-sensor (presence detection, lux sensor, IR receiver, temperature sensor, humidity sensor, 3 digital inputs)                                                 |                              |                     |
| LDALI-BM1                       | Quadruple DALI pushbutton coupler                                                                                                                                      |                              |                     |
| LDALI-BM2                       | Quadruple DALI pushbutton coupler                                                                                                                                      |                              |                     |
| LDALI-RM1                       | DALI Relay Module 8 A                                                                                                                                                  |                              |                     |
| LDALI-RM2                       | DALI Relay Module 8 A, Analog Interface 1 – 10 V                                                                                                                       |                              |                     |
| LDALI-RM3                       | DALI Relay Module 10 A, Analog Interface 0 – 10 V and 1 – 10 V                                                                                                         |                              |                     |
| LDALI-RM4                       | DALI Relay Module 10 A, Analog Interface 0 – 10 V and 1 – 10 V, "spud-mount"                                                                                           |                              |                     |
| LENO-800                        | EnOcean Interface 868 MHz Europe                                                                                                                                       |                              |                     |
| LENO-801                        | EnOcean Interface 902 MHz USA/Canada                                                                                                                                   |                              |                     |
| LENO-802                        | EnOcean Interface 928 MHz Japan                                                                                                                                        |                              |                     |
| LWLAN-800                       | Wireless LAN Interface IEEE 802.11 bgn                                                                                                                                 |                              |                     |
| LSTAT-800-G3-Lx                 | Network Thermostat, black front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, IR receiver, Buttons (Lx)                                  |                              |                     |
| LSTAT-801-G3-Lx                 | Network Thermostat, front black, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, Buttons (Lx)                       |                              |                     |
| LSTAT-802-G3-Lx                 | Network Thermostat, front black, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, CO2, Buttons (Lx)                  |                              |                     |
| LSTAT-800-G3-L20x               | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, IR receiver, Buttons (Lx)                                  |                              |                     |
| LSTAT-801-G3-L20x               | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, Buttons (Lx)                       |                              |                     |
| LSTAT-802-G3-L20x               | Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, CO2, Buttons (Lx)                  |                              |                     |
| LSTAT-80x-CUSTOM                | Customized Network Thermostat, minimum quantity 100 pieces, enclosure G1: grey, G2: black, G3: white; custom print Lx, including 2 working samples, lead time 10 weeks |                              |                     |
| LSMI-804                        | Standard Motor Interface for 64 motors, 4 SMI channels via USB                                                                                                         |                              |                     |

LDALI-PWR2-U, LDALI-PWR4-U

Datasheet #89023219



The DALI-2 power supplies LDALI-PWR2-U and LDALI-PWR4-U are used to power two or four DALI channels. Per channel, the power supplies provide a guaranteed supply current of 116 mA to power devices connected to the DALI channel.

In case the DALI devices connected to the channel consume more than the 116 mA, two DALI outputs of the power supplies can be used in parallel, resulting in a guaranteed supply current of 232 mA (maximum supply current of 250 mA).

Installation

The DALI channel is treated to be non-SELV (Safety Extra Low Voltage). Therefore the relevant installation regulations for low voltage apply. The cable of a DALI channel is either limited to a maximum length of 300 m using a minimum wire cross-section of 1.5 mm<sup>2</sup> (AWG15) or must ensure a maximal voltage drop of 2 V.


Wide Range Supply Voltage

The power supplies accept a wide range of supply voltage from 85-240 VAC, 50/60 Hz. They also feature a starting-current limitation.

DALI Power Outputs

The DALI power outputs provide 18 V (11 V – 20.5 V) and 116 mA guaranteed supply current. The power outputs are isolated from mains by basic isolation. The power outputs are short circuit proof and shut down if thermally overloaded. When a thermal overload occurs, the DALI control lamp switches off.

The LDALI-PWR2-U and LDALI-PWR4-U are DALI-2 certified.

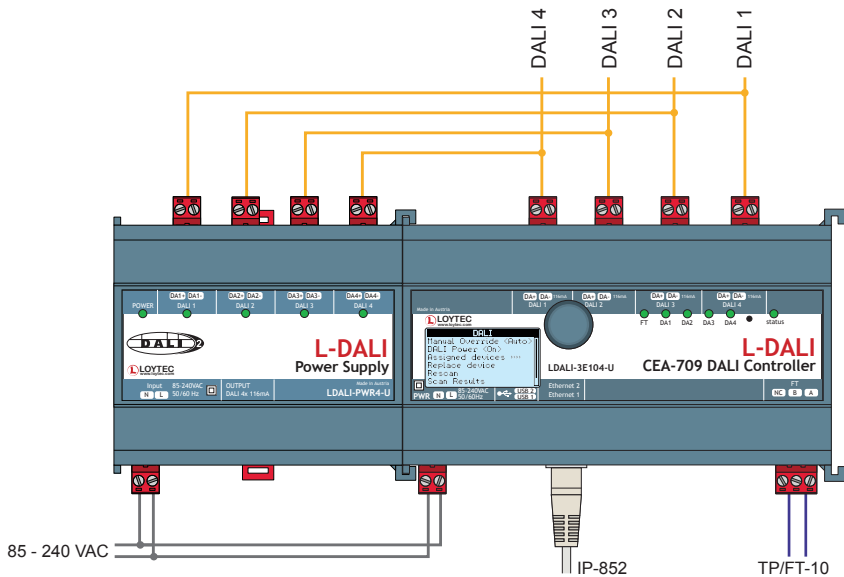

| Specifications       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimensions (mm)      | 107 x 100 x 60 (L x W x H), DIM023                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Installation         | DIN rail mounting following DIN 43880, top hat rail EN 50022                                                                                                                                                                                                                                                                                                                                                                                                         |
| Power supply         | 85-240 V AC, 50/60 Hz, current limited start up, max. 12 W                                                                                                                                                                                                                                                                                                                                                                                                           |
| Operating conditions | 0 °C to 40 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals)                                                                                                                                                                                                                                                                                                                                                                            |
| Interfaces           | LDALI PWR2-U: 2 x 18 V DC (11 V – 20.5 V), each 116 mA guaranteed supply current, 125 mA max. supply current, 7 ms start-up time, short-circuit-proof, thermal overheat protection, basic isolation (not SELV) to the power line<br>LDALI PWR4-U: 4 x 18 V DC (11 V – 20.5 V), each 116 mA guaranteed supply current, 125 mA max. supply current, 7 ms start-up time, short-circuit-proof, thermal overheat protection, basic isolation (not SELV) to the power line |
| Certificates         | DALI-2                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Order number         | Product description                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| LDALI-PWR2-U         | DALI power supply unit for 2 DALI channels                                                                                                                                                                                                                                                                                                                                                                                                                           |
| LDALI-PWR4-U         | DALI power supply unit for 4 DALI channels                                                                                                                                                                                                                                                                                                                                                                                                                           |



The LOYTEC LDALI-MS2 multi-sensor performs occupancy detection and measures the lux level. It integrates perfectly into the L-DALI product line of lighting controllers and LROC-40x room automation controllers. The sensor uses a passive infrared presence detector, which is optimized for use in typical office environments, where even the small movements of somebody working at a desk have to be detected across the complete detection area. Its presence detection zone diameter of 10.8 m at 3 m mounting height is ideal to cover a typical office room or an area in an open office space.

With the already built-in infrared receiver, the room's lights, sunblinds and HVAC system can be controlled via the optionally available IR remote control L-RC1. In addition to occupancy and lux sensors, the LDALI-MS2 comes with integrated temperature and humidity sensors. In room automation applications, those values can be used to calculate the current dew point. On the back of the sensor, there is a connector for three digital inputs, allowing to connect conventional switches and push-buttons, window contacts, dew point sensor, etc. This feature not only saves on additional hardware, but also significantly reduces wiring costs, as the inputs can be wired inside the room and wires no longer have to be pulled to the I/O modules in the switching cabinet.

The LDALI-MS2 comes with three mounting options: It can be mounted in-wall in standard flush-mounted boxes, spring snap in false ceilings and on-wall with the included surface mounting box.

Communication and power supply is handled via the DALI bus. The LDALI-MS2 supports the DALI-2 protocol as defined in the IEC 62386 2014 standard and can be integrated into DALI-2 systems of other vendors.

## Features


- Easy integration into LOYTEC L-DALI lighting systems and LROC-40x room automation controllers with a special focus on lighting control and reducing energy costs
- Supports DALI-2 as defined in IEC 62386 2014 standard (input device)
- High sensitivity Occupancy detection (PIR), optimized for office applications
- Lux level measurements
- Built-in infrared receiver for optional infrared remote control L-RC1
- Temperature sensor
- Humidity sensor
- 3 digital inputs (dry contact)
- LDALI-MS2 can be mounted in a flush-mounted box, directly in false ceilings (spring mount included) or on-wall (surface mounting box included)
- Multi-master compatible, up to 16 LDALI-MS2 sensors per DALI channel given a sufficiently dimensioned bus supply
- Supplied via the DALI channel, no external power supply is necessary
- Sensor head can be tilted up to  $\pm 15^\circ$  vertically

## Specifications

|                                             |                                                                                                                                                                                                                           |
|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimensions (mm)                             | Total-Ø: 104; flush-mounted-Ø: 58; height flush-mounted: 30; DIM040                                                                                                                                                       |
| Installation                                | Ceiling mount: <ul style="list-style-type: none"> <li>• Flush-mounted installation</li> <li>• Direct installation in false ceilings (spring mount included)</li> <li>• On-wall (surface mounting box included)</li> </ul> |
| Power supply                                | DALI bus, typ. 3.5 mA at 16 VDC                                                                                                                                                                                           |
| Operating conditions                        | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP20                                                                                                                                                   |
| Interfaces                                  | 1 x DALI, protected against overvoltage (power supply)<br>1 x infrared remote control receiver<br>3 x digital input (dry contact, not protected against overvoltage)                                                      |
| DALI protocol conformance (IEC 62386 parts) | 101 ed2, 103 ed1 (input device), 301 ed1 (digital inputs, IR remote), 303 ed1 (PIR), 304 ed1 (lux sensor)                                                                                                                 |
| Color                                       | RAL 9010, pure white                                                                                                                                                                                                      |
| For use with                                | LDALI-3E102-U, LDALI-3E104-U, LDALI-3E101-U, LDALI-ME204-U, LDALI-ME201-U, LDALI-PLC4, LROC-40x                                                                                                                           |

LDALI-MS2

| Resource limits                  |                                                                                                                                                         |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of LDALI-MS2              | 16 per DALI channel, with sufficient dimensioned DALI bus power supply                                                                                  |
| Passive infrared motion detector | Detection diameter: 10,8 m @ 3 m mounting height (92 m²),<br>136 zones, opening angle: 122°, max. mounting height: 5 m                                  |
| Lux level measurement            | 0 – 4000 lux, resolution: 0.125 lux                                                                                                                     |
| Temperature measurement          | - 5 - 60 °C, resolution: 0.1 °C, accuracy: ±0.2 °C (0 – 70 °C)                                                                                          |
| Rel. Humidity measurement        | 0 % – 100 %, resolution 0.5 %, accuracy:<br>typ. ±2.2 % R.H. @ 25 °C, 20 % – 80 % R.H.<br>typ. ±4 % R.H. @ 25 °C, 0 % – 20 % R.H. and 80 % – 100 % R.H. |
| Connection wires profile         | 0.2 - 1.5 mm² [AWG 28 - 14]                                                                                                                             |
| Wire stripping length            | 6 mm [0.24 in]                                                                                                                                          |
| Wire length for digital inputs   | < 10 m                                                                                                                                                  |

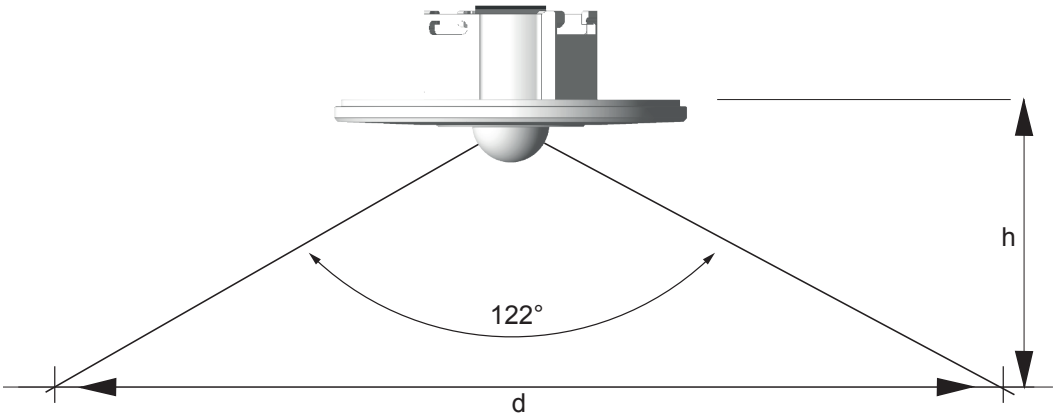

Mounting Height / Coverage

| h [m] | d [m] | A [m²] |
|-------|-------|--------|
| 1.5   | 5.4   | 23     |
| 2.0   | 7.2   | 41     |
| 2.5   | 9.0   | 64     |
| 2.7   | 9.7   | 75     |
| 3.0   | 10.8  | 92     |
| 3.5   | 12.6  | 125    |
| 4.0   | 14.4  | 164    |
| 4.5   | 16.2  | 207    |
| 5.0   | 18.0  | 256    |

| Order number | Product description                                                                                                    |
|--------------|------------------------------------------------------------------------------------------------------------------------|
| LDALI-MS2    | DALI multi-sensor (presence detection, lux sensor, IR receiver, temperature sensor, humidity sensor, 3 digital inputs) |
| L-RC1        | Infrared remote control for room automation applications                                                               |





The L-RC1 is an infrared remote control, optimized for room automation applications. It allows the control of the room's lights, sunblinds and HVAC system.

It supports the individual control for up to two channels – groups of luminaires and blinds – and scene control for up to three scenes.

For HVAC applications the temperature setpoint and fan speed can be adjusted, A/C can be switched on and off and the room's occupancy status can be changed.

The L-RC1 is designed to work with L-DALI multi-sensors (LDALI-MS1, LDALI-MS2) and L-STAT network thermostats.

## Features

- Infrared remote control optimized for room automation applications
- Control up to two light channels
- Control up to two sunblind channels
- Scene control for up to three scenes
- Adjust temperature setpoint\*
- Adjust fan speed\*
- Set occupancy status\*
- Switch A/C on/off\*

## Specifications

|                      |                                                                                           |
|----------------------|-------------------------------------------------------------------------------------------|
| Dimensions (mm)      | 40.5 x 86.4 x 7.20 (L x W x H), DIM039                                                    |
| Power supply         | 1 x CR2025 3.0 V button battery                                                           |
| Operating conditions | 0 °C to 40 °C, 10 – 90 % RH, non condensing                                               |
| Interfaces           | IR transmitter, 38±0.5 KHz, NEC standard IR format                                        |
| Keys                 | 18                                                                                        |
| For use with         | LDALI-MS1, LDALI-MS2, LSTAT-800-Gx-Lx, LSTAT-801-Gx-Lx, LSTAT-802-Gx-Lx, LSTAT-80x-CUSTOM |

## Order number


## Product description

|       |                                                          |
|-------|----------------------------------------------------------|
| L-RC1 | Infrared remote control for room automation applications |
|-------|----------------------------------------------------------|

\* Not supported when used with LDALI-MS1

## LDALI-BM2

Datasheet #89057619

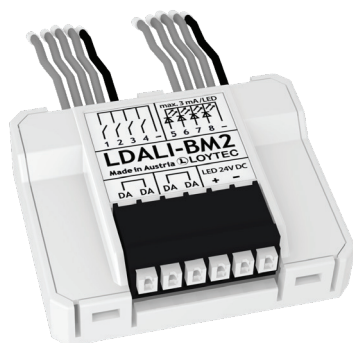

The LDALI-BM2 pushbutton coupler integrates up to four customary light push buttons and switches into a DALI channel. Alternatively, two of the four inputs can be used as analog inputs to connect devices like slider, dials or even resistance based sensors like NTC temperature sensors.

Connected pushbuttons or switches can be used to control luminaires and sunblinds using L-DALI lighting controllers or L-ROC room automation controllers. The following functions are available:

- Dim up, dim down
- Off
- On with last dimming value
- Scene recall: 1–15
- Dim to a specified value in %
- Color temperature warmer/colder
- Active auto mode
- Move Sunblind up/down

In the mode toggle, the function is carried out depending on the lighting status (toggle switch). Communication and power supply is handled via the DALI bus. The LDALI-BM2 supports the DALI-2 protocol as defined in the IEC 62386 2014 standard and can be integrated into DALI-2 systems of other vendors.

### Features

- Easy integration into LOYTEC L-DALI lighting systems and LROC-40x room automation controllers
- Supports DALI-2 as defined in IEC 62386 2014 standard (input device)
- 2 digital inputs (dry contact) for conventional pushbuttons or switches
- 2 universal inputs (potential free) for conventional push-buttons, switches, sliders, dials or NTC temperature sensors
- 4 outputs for direct control of feedback LEDs\*
- Multi-master compatible, up to 64 LDALI-BM2 pushbutton couplers per DALI channel with sufficient dimensioned bus supply
- Supplied via the DALI channel, no external power supply is necessary
- Pre-confectioned wires for connection of inputs
- Optimized for mounting behind standard switches
- Optional supply via 24 V DC

### Specifications

|                                             |                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimensions (mm)                             | 45.8 x 37.8 x 13.5 (L x W x H), DIM041                                                                                                                                                                                                                                                                                                                                          |
| Installation                                | flush-mounted installation, can be directly installed behind the pushbutton/switch                                                                                                                                                                                                                                                                                              |
| Power supply                                | DALI bus, typ. 3.0 mA at 16 V DC (without LEDs)<br>DALI bus, typ. 0.5 mA at 16 V DC with optional 24 V DC (± 10%)                                                                                                                                                                                                                                                               |
| Operating conditions                        | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP20                                                                                                                                                                                                                                                                                                         |
| Interfaces                                  | 1 x DALI, protected against overvoltage (power supply)<br>2 x universal inputs (digital input or resistance measurement, not protected against overvoltage, pluggable),<br>wire length < 10 m (digital), wire length < 50 cm (analog)<br>2 x digital input (dry contact, not protected against overvoltage, pluggable),<br>wire length < 10 m<br>4 x outputs for feedback LEDs* |
| DALI protocol conformance (IEC 62386 parts) | 101 ed2, 103 ed1 (input device), 301 ed1 (digital inputs), 302 ed1 (universal inputs)                                                                                                                                                                                                                                                                                           |
| For use with                                | LDALI-3E102-U, LDALI-3E104-U, LDALI-3E101-U, LDALI-ME204-U,<br>LDALI-ME201-U, LDALI-PLC4, LROC-40x                                                                                                                                                                                                                                                                              |

\* Available in future product version

**Resource limits**

|                                            |                                                                        |
|--------------------------------------------|------------------------------------------------------------------------|
| Number of LDALI-BM2                        | 64 per DALI channel, with sufficient dimensioned DALI bus power supply |
| Connection wires profile                   | 0.2 - 1.5 mm <sup>2</sup> [AWG 24 - 16]                                |
| Wire stripping length                      | 8 mm [0.31 in]                                                         |
| Wire length for digital inputs             | < 10 m                                                                 |
| Wire length for universal inputs (digital) | < 10 m                                                                 |
| Wire length for universal inputs (analog)  | < 50 cm                                                                |

**Order number      Product description**

|           |                                   |
|-----------|-----------------------------------|
| LDALI-BM2 | Quadruple DALI pushbutton coupler |
|-----------|-----------------------------------|

## LDALI-RM3, LDALI-RM4

Datasheet #89059019



The LDALI-RM Relay Modules enable the control of standard consumers via a DALI channel. Typical application scenarios are the integration of non-DALI luminaires or other loads like fans in toilets or washrooms and motors for partition walls or screens in DALI lighting applications.

The built-in relay contact can be used for currents of up to 10 A or loads of up to 2.500 VA, respectively. It supports a wide voltage range of 120 – 347 V AC and up to 30 V DC. Zero cross switching technology is used to be able to handle the large in-rush currents typically found in lighting applications. For legacy dimmable ballasts the LDALI-RM modules are also equipped with an 0-10 V and 1-10 V interface, which can be used together with the relay contact to control these types of loads via DALI.

Together with the LOYTEC DALI controllers or LROC-40x room automation controllers, the LDALI-RM modules act as programmable switching output modules. The integration of the module in the DALI network follows the same simple steps as the integration of a DALI lamp. The device supports the DALI specification IEC 62386-208 (Device Type 7, “switching function”) for non-dimmable loads and the DALI specifications IEC 62386-206 (Device Type 5, “converter”) for loads dimmable via the 0 - 10 V and 1 – 10 V interface, respectively. The LDALI-RM modules are directly connected to a DALI channel and also supplied with energy by that channel.

As a unique safety feature the relay state for fault conditions can be configured: In case of a loss of power on the DALI bus, the relay will switch to the position as defined with the DALI configuration register “System Failure Level”.


The LDALI-RM module comes with two housing options: While the LDALI-RM3 is designed for installation in distribution boxes or behind standard plugs in installation boxes, the LDALI-RM4 allows installation on US-style fixtures or junction box ½” knockouts (“spud-mount”).

### Features

- Easy integration into LOYTEC L-DALI lighting systems and LROC-40x room automation controllers
- Device configuration with the free L-DALI Configurator or via the built-in web server of the L-DALI controller
- Programmable switching output for standard consumers in the power grid
- Universal voltage support (120 – 347 V AC)
- Up to 64 LDALI-RM Relay Modules per DALI channel with sufficient dimensioned bus supply
- Supplied via the DALI channel
- Potential-free, bi-stable relay make contact
- Analog Interface 0 – 10 V and 1 – 10 V for legacy dimmable lamps
- DALI specification IEC 62386-208 (Device Type 7 – Switching Function) supported
- DALI specification IEC 62386-206 (Device Type 5 – Converter) supported
- Configurable relay position in case of power loss
- Zero cross switching function



## LDALI-RM3, LDALI-RM4

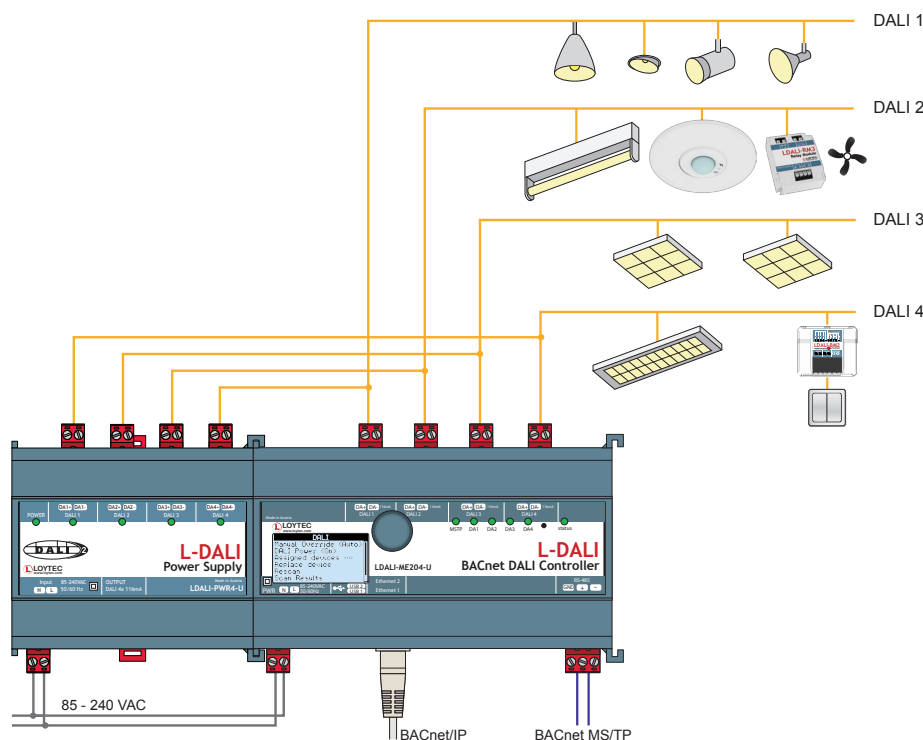

## Specifications

| Type                 | LDALI-RM3                                                                                           | LDALI-RM4                        |
|----------------------|-----------------------------------------------------------------------------------------------------|----------------------------------|
| Dimensions (mm)      | 51 x 41 x 21 (L x W x H), DIM042                                                                    | 51 x 51 x 21 (L x W x H), DIM042 |
| Power supply         | DALI bus, typ. 3 mA at 16 VDC                                                                       |                                  |
| Operating conditions | 0 °C to 50 °C, 10 – 90 % RH, non-condensing, degree of protection: IP20                             |                                  |
| Interfaces           | 1 x DALI, protected against overvoltage (power supply)<br>1 x Analog interface 0 – 10 V or 1 – 10 V |                                  |
| For use with         | LDALI-3E102-U, LDALI-3E104-U, LDALI-3E101-U, LDALI-ME204-U,<br>LDALI-ME201-U, LDALI-PLC4, LROC-40x  |                                  |


## Resource limits

|                                      |                                                                 |
|--------------------------------------|-----------------------------------------------------------------|
| Number of LDALI-RM3/LDALI-RM4        | 64 per DALI channel, with sufficient dimensioned DALI bus power |
| Connection wires profile             | 0.5 – 1.5 mm <sup>2</sup> [AWG 24 – 16]                         |
| Wire stripping length                | 8 mm [0.31 in]                                                  |
| Max. switching power                 | 2 500 VA, 300 W                                                 |
| Nominal switching capacity AC        | 10 A, 250 V AC<br>8 A, 277 V AC<br>6 A, 347 V AC                |
| Nominal switching capacity DC        | 10 A, 30 V DC                                                   |
| Relay contact switching voltage      | 120 - 347 V AC / 30 V DC                                        |
| Switching cycle                      | 1.5 x 10 <sup>5</sup>                                           |
| Max. permissible switching frequency | 20 times/min                                                    |
| Interface (0 – 10 V / 1 – 10 V)      | current sink 1 mA                                               |

L-DALI Relay Module

LDALI-RM3, LDALI-RM4

| Order number | Product description                                                          |
|--------------|------------------------------------------------------------------------------|
| LDALI-RM3    | DALI Relay Module 10 A, Analog Interface 0 – 10 V and 1 – 10 V               |
| LDALI-RM4    | DALI Relay Module 10 A, Analog Interface 0 – 10 V and 1 – 10 V, "spud-mount" |

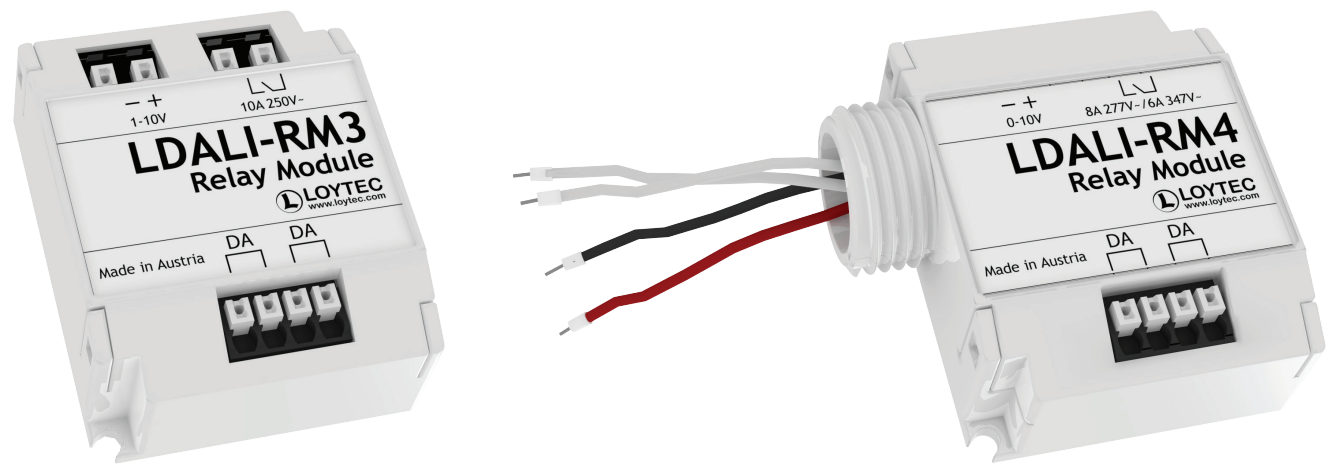





# Routers, NIC





# LIP-1ECTC, LIP-3ECTC, LIP-33ECTC, LIP-3333ECTC

Datasheet #89013119

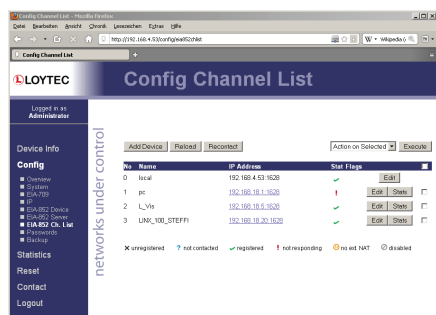

The L-IP Routers LIP-1ECTC, LIP-3ECTC, LIP-33ECTC, and LIP-3333ECTC connect twisted pair channels (TP/FT-10 or TP/XF-1250) with the Ethernet/IP channel (IP-852) in LonMark Systems. L-IP routes CEA-709 packets through an IP based network such as a LAN (Ethernet), an Intranet, or even the Internet.

In order to provide optimal router configurations, the L-IP is available in four different versions providing either 4 x TP/FT-10, 2 x TP/FT-10, 1 x TP/FT10, or 1 x TP/XF-1250. Every L-IP supports the operating modes "Smart Switch Mode" and "Configured Router Mode".


For an easy integration on the IP side, the L-IP provides a web interface. On L-IP Routers LIP-1ECTC, LIP-3ECTC, LIP-33ECTC, and LIP-3333ECTC the Web interface can also be used via an encrypted HTTPS connection. The web interface can also be used via an encrypted HTTPS connection. Through this web interface, the built-in CEA-852 Configuration Server can be switched on and configured. The Configuration server is thus always available online in the network and no additional software tool is required.

Besides the router functionality, the L-IP Routers provide outstanding capabilities for network diagnostic and analysis. They allow the LPA (LOYTEC Protocol Analyzer) transparent access to the twisted pair channels (TP/FT-10 or TP/XF-1250) on the device via Ethernet/IP – via a local Intranet or the Internet. This allows a fast analysis of data communication and reduces time-consuming troubleshooting. All system registers are available as OPC XML-DA and OPC UA data points.

The L-IP Routers LIP-1ECTC, LIP-3ECTC, LIP-33ECTC, and LIP-3333ECTC are equipped with two Ethernet ports. It can either be configured to use the internal switch to interconnect the two ports or every port is configured to work in a separate IP network.

When the Ethernet ports are configured for two separate IP networks, one port can be connected for instance to a WAN (Wide Area Network) with enabled network security (HTTPS) while the second port can be configured to be connected to an insecure network (building LAN) where the standard building automation protocols are present (e.g. IP-852). These devices also feature firewall functionality of course to isolate particular protocols or services between the ports.

Using the internal switch, a daisy chained line topology of up to 20 devices can be built, which reduces costs for network installation. The IP switch also allows the setup of a redundant Ethernet installation (ring topology), which increases reliability. The redundant Ethernet topology is enabled by the Rapid Spanning Tree Protocol (RSTP), which is supported by most managed switches.

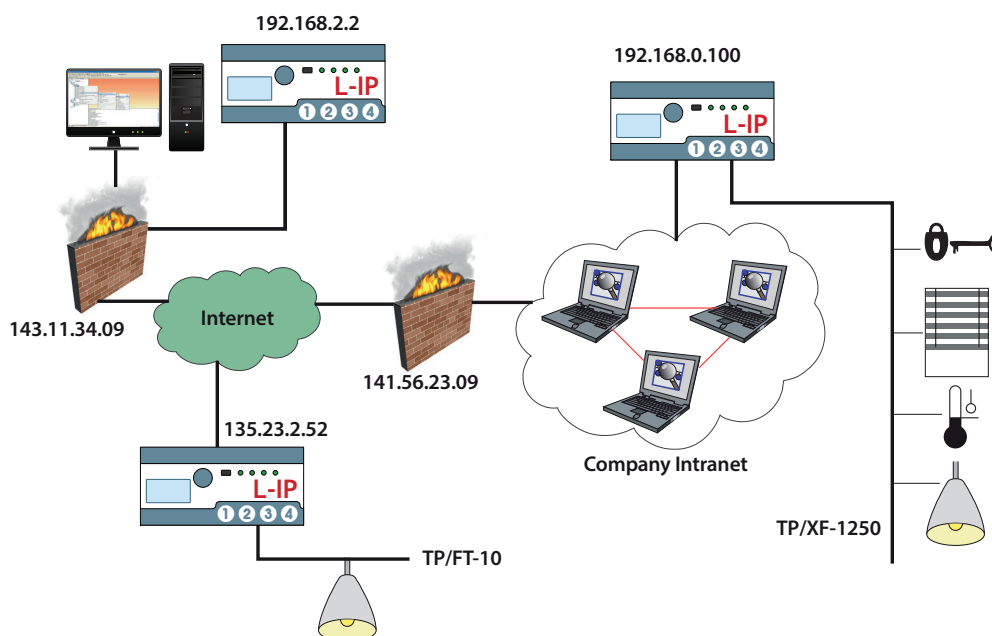



# LIP-1ECTC, LIP-3ECTC, LIP-33ECTC, LIP-3333ECTC

## Features

- Routes CEA-709 packets between TP/FT-10 (link power compatible) or TP/XF-1250 channels and Ethernet/IP (IP-852)
- Compliant with CEA-709, CEA-852, and ISO/IEC 14908-1 standard (LonMark System)
- Supports Configured Router mode, Smart Switch mode, and Repeater mode
- Built-in CEA-852 configuration server for up to 100 members
- Support for operation behind NAT routers and firewalls
- Easy installation, Auto-NAT, roaming, DHCP
- Remote LPA support with LPA-IP
- Integrated web server for device and IP-852 configuration
- Built-in enhanced communication test for IP-852
- Network diagnostic LEDs
- Dual switched or separated Ethernet ports
- Secure web interface via HTTPS
- Built-in OPC XML-DA and OPC UA server
- 128x64 graphic display with backlight
- Local display of device information
- Manual operation using the jog dial or VNC client
- Supports WLAN through LWLAN-800 Interface
- Stores user-defined project documentation

## Specifications

|                      |                                                                                         |
|----------------------|-----------------------------------------------------------------------------------------|
| Operating conditions | 0 °C to 50 °C, 10–90 % RH, non condensing, degree of protection: IP40, IP20 (terminals) |
| Installation         | DIN rail mounting following DIN 43880, top hat rail EN 50022                            |
| Power supply         | 12-35 VDC / 12-24 V AC $\pm 10\%$ , typ. 3 W                                            |

## Specifications

| Type            | LIP-1ECTC                                                                                                                                                               | LIP-3ECTC    | LIP-33ECTC   | LIP-3333ECTC                       |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------------|------------------------------------|
| Dimensions (mm) | 107 x 100 x 75 (L x W x H), DIM046                                                                                                                                      |              |              | 159 x 100 x 75 (L x W x H), DIM054 |
| Interfaces      | 2 x Ethernet (100Base-T):<br>LonMark IP-852, OPC XML-DA (server), OPC UA (server), HTTP, FTP, SSH, HTTPS, Firewall, NTP, VNC, SNMP<br>2 x USB-A: WLAN (needs LWLAN-800) |              |              |                                    |
|                 | 1 x TP/XF-1250                                                                                                                                                          | 1 x TP/FT-10 | 2 x TP/FT-10 | 4 x TP/FT-10                       |
| Tools           | Configuration via web browser or locally via graphic display and jog dial                                                                                               |              |              |                                    |




## Resource limits

|                      |                                                                          |
|----------------------|--------------------------------------------------------------------------|
| Configuration Server | CEA-852 configuration server for up to 100 members on the IP-852 channel |
|----------------------|--------------------------------------------------------------------------|

## Order number

## Product description

|              |                                                                                                         |
|--------------|---------------------------------------------------------------------------------------------------------|
| LIP-1ECTC    | CEA-709/IP-852 Router, 1 x TP/XF-1250, 1 x Ethernet-Port (IP-852)                                       |
| LIP-3ECTC    | CEA-709/IP-852 Router, 1 x TP/FT-10, 2 x Ethernet port (IP-852)                                         |
| LIP-33ECTC   | CEA-709/IP-852 Router, 2 x TP/FT-10, 2 x Ethernet port (IP-852)                                         |
| LIP-3333ECTC | CEA-709/IP-852 Router, 4 x TP/FT-10, 1 x Ethernet port (IP-852)                                         |
| LPOW-2415B   | Power supply unit with power connector 24 VDC, 15 W                                                     |
| LWLAN-800    | Wireless LAN Interface IEEE 802.11bgn                                                                   |
| LT-03        | Network terminator, 1 x TP/FT-10 or TP/LPT-10 (bus or free topology), 1 x Network Access Connector RJ45 |
| LT-13        | Network terminator, 1 x TP/FT-10 or TP/LPT-10 (bus or free topology), 1 x TP/XF-1250                    |
| LT-33        | Network terminator, 2 x TP/FT-10 or TP/LPT-10 (bus or free topology)                                    |

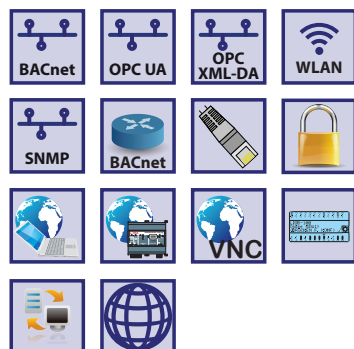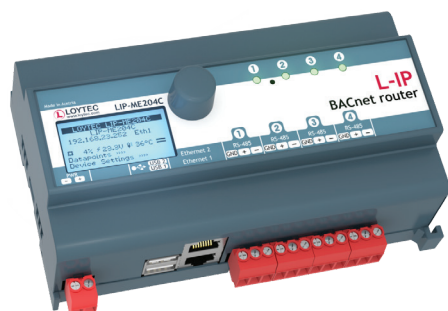

The LIP-ME201C, LIP-ME202C, and LIP-ME204C BACnet/IP Routers connect BACnet MS/TP channels to a BACnet/IP network. The BACnet routers are compliant with the standards ASHRAE 135-2012 and ISO 16484-5:2012. The routers can be configured to act as a BACnet Broadcast Management Device (BBMD). The L-IP BACnet/IP Routers also provide Foreign Device support.

The BACnet router can act as a BACnet Time Master and as a BACnet MS/TP Slave Proxy. Extended features like the optional write protection of the BDT, a BACnet/IP Access Control List (ACL), and a simple communications test for BBMD help to locate issues on the network. The BACnet router also features remote MS/TP data packet capturing. BACnet MS/TP data packets are captured by the device and can be analyzed using Wireshark (free Protocol Analyzer, [www.wireshark.org](http://www.wireshark.org)). Wireshark can either connect to the L-IP online or the capture file is loaded from the L-IPs web server and analyzed offline in Wireshark.

The complete device configuration of the BACnet router is done via the built-in web server, optionally also secured via HTTPS protocol. All system registers are available as OPC XML-DA and OPC UA data points.

The BACnet router is BTL certified as BACnet Building Controllers (B-BC).

Each L-IP BACnet/IP Router is equipped with two Ethernet ports. It can either be configured to use the internal switch to interconnect the two ports or every port is configured to work in a separate IP network.

When the Ethernet ports are configured for two separate IP networks, one port can be connected for instance to a WAN (Wide Area Network) with enabled network security (HTTPS) while the second port can be configured to be connected to an insecure network (LAN) where the standard building automation protocols like BACnet/IP, LON/IP, or Modbus TCP are present. These devices also feature fire-wall functionality of course to isolate particular protocols or services between the ports.


Using the internal switch, a daisy chained line topology of up to 20 devices can be built, which reduces costs for network installation. The IP switch also allows the setup of a redundant Ethernet installation (ring topology), which increases reliability. The redundant Ethernet topology is enabled by the Rapid Spanning Tree Protocol (RSTP), which is supported by most managed switches.

## Features

- Routes packets between BACnet MS/TP and BACnet/IP
- Compliant with ANSI/ASHRAE 135-2012 and ISO 16484-5:2012 standard
- BBMD (BACnet Broadcast Management Device)
- Foreign device support
- Slave Proxy for up to 32 MS/TP slave devices
- Configuration via built-in web server
- Built-in OPC XML-DA and OPC UA server
- Dual switched or separated Ethernet ports
- Access to network statistics via web browser
- BACnet MS/TP diagnostic LED
- BACnet MS/TP diagnostic via web interface
- MS/TP remote data packet capture (Wireshark)
- Ethernet link and activity LED
- Secure web interface via HTTPS
- 128x64 graphic display with backlight
- Local display of device information
- Manual operation using the jog dial or VNC client
- Supports WLAN through LWLAN-800 Interface
- Stores user-defined project documentation

## LIP-ME201C, LIP-ME202C, LIP-ME204C

| Specifications       |                                                                                                                               |                  |                                         |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------|------------------|-----------------------------------------|
| Type                 | LIP-ME201C                                                                                                                    | LIP-ME202C       | LIP-ME204C                              |
| Dimensions (mm)      | 107 x 100 x 75 (L x W x H), DIM046                                                                                            |                  | 159 x 100 x 75 (L x W x H), DIM054      |
| Installation         | DIN rail mounting following DIN 43880, top hat rail EN 50022                                                                  |                  |                                         |
| Power supply         | 12-35 VDC / 12-24 VAC $\pm 10\%$ , typ. 2.5 W                                                                                 |                  | 24 VDC / 24 VAC $\pm 10\%$ , typ. 2.5 W |
| Operating conditions | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals)                                     |                  |                                         |
| Interfaces           | 2 x Ethernet (100Base-T):<br>BACnet/IP, OPC XML-DA (server), OPC UA (server), HTTP, FTP, SSH, HTTPS, Firewall, NTP, VNC, SNMP |                  |                                         |
|                      | 2 x USB-A: WLAN (needs LWLAN-800)                                                                                             |                  |                                         |
|                      | 1 x BACnet MS/TP                                                                                                              | 2 x BACnet MS/TP | 4 x BACnet MS/TP                        |
| Tools                | Configuration via web browser                                                                                                 |                  |                                         |
| Order number         | Product description                                                                                                           |                  |                                         |
| LIP-ME201C           | BACnet/IP Router, 1 x BACnet MS/TP (RS-485), 2 x Ethernet port (BACnet/IP)                                                    |                  |                                         |
| LIP-ME202C           | BACnet/IP Router, 2 x BACnet MS/TP (RS-485), 2 x Ethernet port (BACnet/IP)                                                    |                  |                                         |
| LIP-ME204C           | BACnet/IP Router, 4 x BACnet MS/TP (RS-485), 2 x Ethernet port (BACnet/IP)                                                    |                  |                                         |
| LPOW-2415B           | Power supply unit with power connector 24 VDC, 15 W                                                                           |                  |                                         |
| LT-04                | Network terminator, 1 x RS-485 (bus topology, ANSI TIA/EIA-485), 1 x Network Access Connector RJ45                            |                  |                                         |
| LT-B4                | Network terminator, 1 x RS-485 (bus topology, ANSI TIA/EIA-485) with biasing circuit (failsafe biasing)                       |                  |                                         |

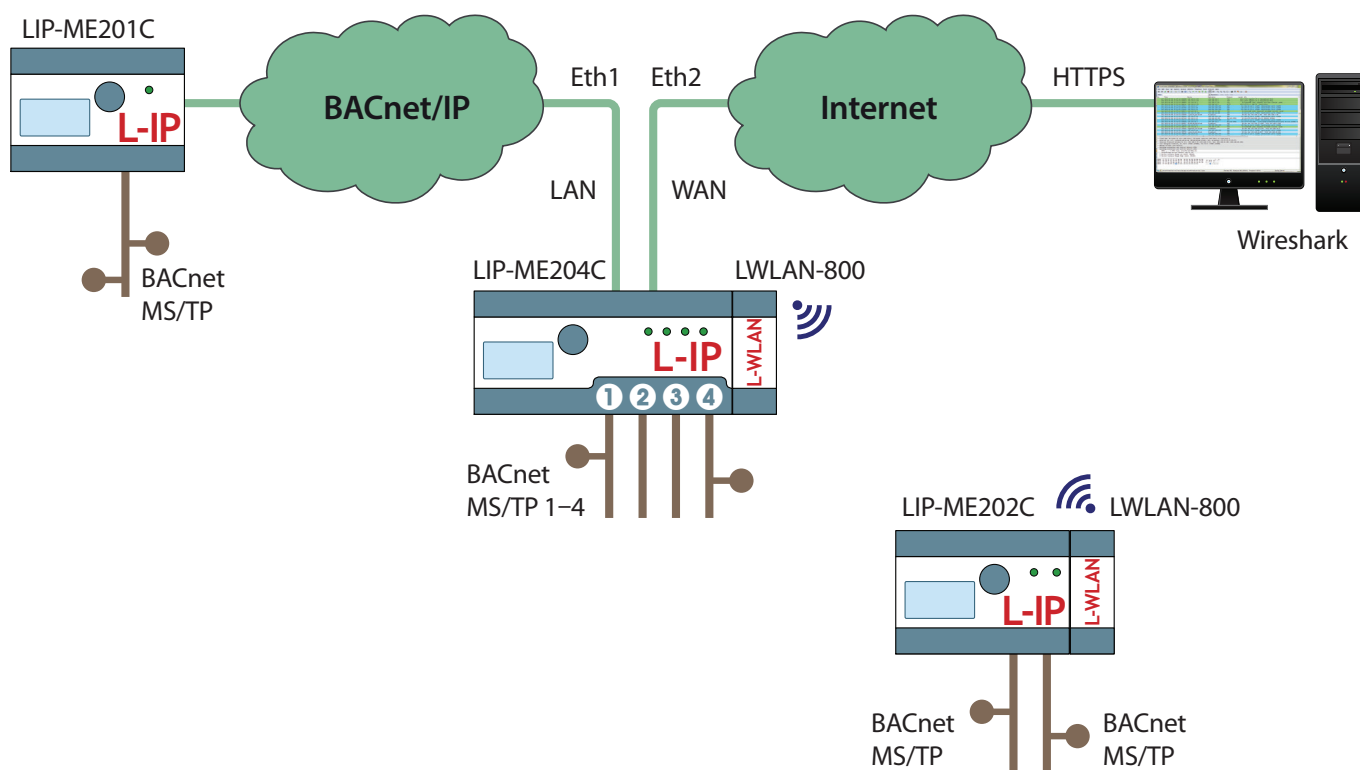



The L-IP Redundant connects twisted pair channels (TP/FT-10 or TP/XF-1250) with the Ethernet/IP-852 channel in LonMark Systems and allows building a redundant network infrastructure. An integrated algorithm detects and “heals” a broken cable on the TP/FT-10 channel and helps to find the point of failure immediately. In addition, the L-IP Redundant monitors the nodes on the TP/FT-10 channel and creates an alarm in case of a failure. For this reason, L-IP Redundant can only be used as a Configured Router.

Full redundancy on both the IP channel and the CEA-709 channel including device redundancy can be achieved using two devices in parallel (Twin Mode).

The integrated CEA-852 Configuration Server can manage up to 100 IP-852 devices. The configuration is done through the built-in web interface.

Alarms report a broken network cable, node failures, or high communication loads. The L-IP Redundant supports alarming according to the LonMark profile definition. Similarly, alarm conditions are provided via network variables. Alarm messages are displayed immediately via the built-in web interface and the LNS® plug-in. Alarm conditions can be forwarded via e-mail in combination with a L-INX Automation Server, an L-VIS Touch Panel, or an L-GATE Gateway, to inform about a node failure or a broken network cable.

## Features

- Routes packets between a TP/FT-10 channel (link power compatible) and Ethernet/IP (IP-852)
- Compliant with CEA-709, CEA-852, and ISO/IEC 14908-1 standard (LonMark System)
- Detection of broken cable (TP/FT-10 channel)
- Full redundancy with two L-IP Redundant devices in Twin Mode (IP channel and TP/FT-10 channel)
- Device redundancy by mutual monitoring of L-IP Redundant devices in Twin mode
- Communication on the TP/FT-10 channel is guaranteed in case of a single cable break
- Nodes on the TP/FT-10 channel can be monitored
- Notification via SNVTs and LonMark alarming via Node Object
- Monitors network health (bandwidth utilization, error rate, etc.)
- Supports Configured Router Mode only
- Built-in CEA-852 configuration server for up to 100 members
- Support for operation behind NAT routers and firewalls
- Easy installation, Auto-NAT, roaming, DHCP
- Remote LPA support with LPA-IP
- Integrated web server for device and IP-852 configuration
- Built-in enhanced communication test for IP-852
- Network diagnostic LEDs

## Specifications


|                      |                                                                                           |
|----------------------|-------------------------------------------------------------------------------------------|
| Dimensions (mm)      | 107 x 100 x 60 (L x W x H), DIM009                                                        |
| Installation         | DIN rail mounting following DIN 43880, top hat rail EN 50022                              |
| Power supply         | 12-35 VDC / 12-24 VAC ±10 %, typ. 3 W                                                     |
| Operating conditions | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals) |
| Interfaces           | 1 x Ethernet (100Base-T):<br>LonMark IP-852, HTTP, FTP<br>2 x TP/FT-10                    |
| Tools                | L-IP Redundant Configurator                                                               |

## Resource limits

|                      |                                                                      |
|----------------------|----------------------------------------------------------------------|
| Configuration Server | CEA-852 configuration server for up to 100 members on the IP channel |
|----------------------|----------------------------------------------------------------------|



| Order number | Product description                                                                                     |
|--------------|---------------------------------------------------------------------------------------------------------|
| LIP-33ECRB   | CEA-709/IP-852 Router for redundant mode, 2 x TP/FT-10, 1 x Ethernet port (IP-852)                      |
| LPOW-2415B   | Power supply unit with power connector 24 VDC, 15 W                                                     |
| LT-03        | Network terminator, 1 x TP/FT-10 or TP/LPT-10 (bus or free topology), 1 x Network Access Connector RJ45 |
| LT-33        | Network terminator, 2 x TP/FT-10 or TP/LPT-10 (bus or free topology)                                    |

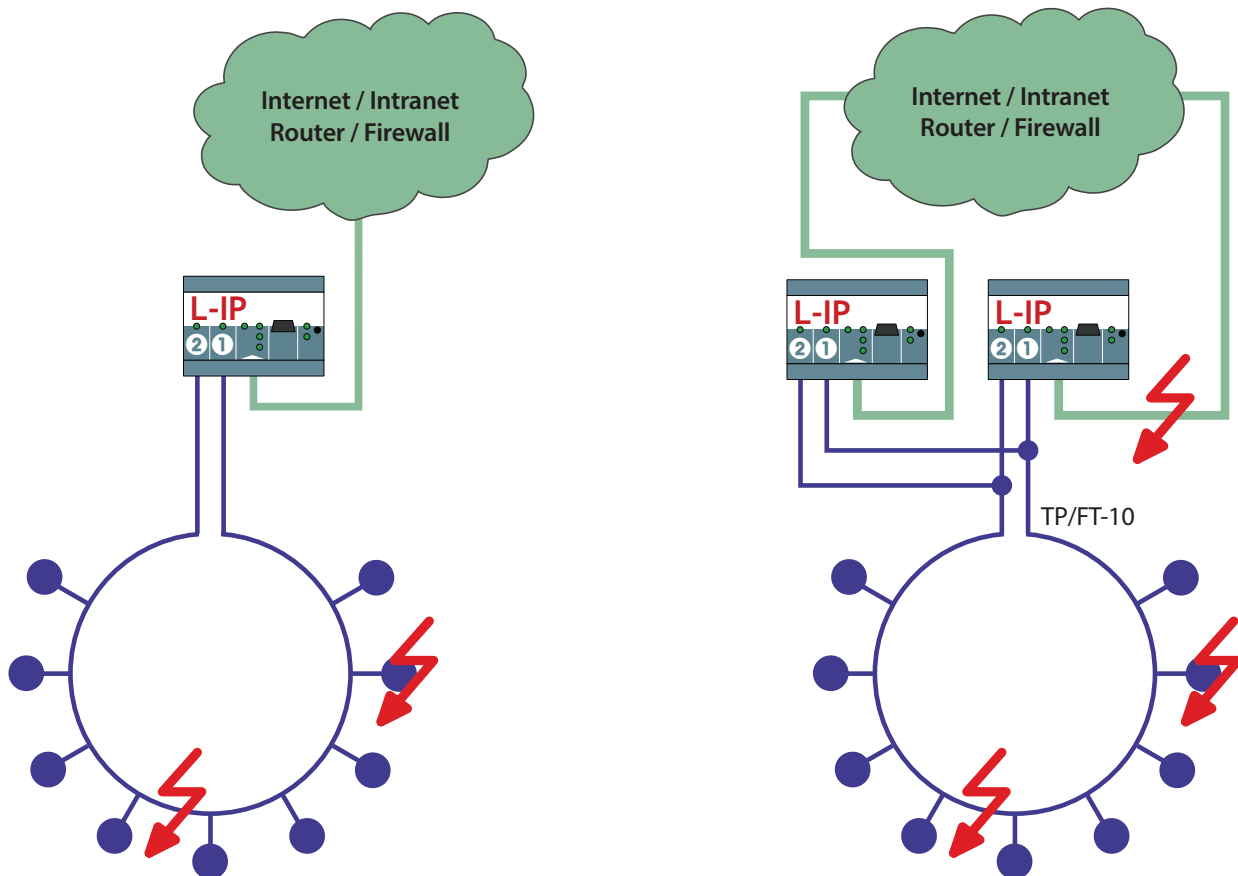

## L-Switch<sup>XP</sup> CEA-709 Router

Not recommended for new projects!  
Product is going to be end of life in Q1 2019.

BACnet  
✓ CEA-709  
KNX

Modbus  
M-Bus  
OPC

# LS-33/13/11/13300/33300/13333/11333CB

Datasheet #89011919



The L-Switch<sup>XP</sup> is the solution for interconnecting multiple twisted pair channels (TP/FT-10 or TP/XF-1250 channels) in LonMark Systems. It provides up to five ports and routes packets between these ports. The L-Switch<sup>XP</sup> router delivers first class performance and flexibility in use. In order to provide the optimal router configuration, the L-Switch<sup>XP</sup> comes with two, three, or five ports and two operating modes "Smart Switch Mode" and "Configured Router Mode".

## Features


- Physical separation and logical connection of up to five CEA-709 network segments
- TP/FT-10 channels are compatible with link power
- Compliant with CEA-709 and ISO/IEC 14908-1 (LonMark System)
- Can be used as configured router, learning switch, or as repeater (Smart Switch mode)
- Plug and play installation (Smart Switch mode)
- Forwards packets of up to 256 bytes length
- Supports up to four domains (Smart Switch mode)
- Learning of the topology with forwarding decision based on subnet/node and group addresses (Smart Switch mode)
- Short propagation delay between ports
- Network diagnostic LEDs
- CEA-709 status and activity LED
- Shapes for LonMaker<sup>®</sup> Network Management Tool available

## Specifications

| Type                 | LS-33CB                                                                                   | LS-13CB                        | LS-11CB        | LS-33300CB                         | LS-13300CB                     | LS-13333CB                     | LS-11333CB                     |
|----------------------|-------------------------------------------------------------------------------------------|--------------------------------|----------------|------------------------------------|--------------------------------|--------------------------------|--------------------------------|
| Dimensions (mm)      | 107 x 100 x 60 (L x W x H), DIM010                                                        |                                |                | 159 x 100 x 60 (L x W x H), DIM008 |                                |                                |                                |
| Installation         | DIN rail mounting following DIN 43880, top hat rail EN 50022                              |                                |                |                                    |                                |                                |                                |
| Power supply         | 12-35 VDC / 12-24 VAC ±10 %, typ. 3 W                                                     |                                |                |                                    |                                |                                |                                |
| Operating conditions | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals) |                                |                |                                    |                                |                                |                                |
| Interfaces           | 2 x TP/FT-10                                                                              | 1 x TP/XF-1250<br>1 x TP/FT-10 | 2 x TP/XF-1250 | 3 x TP/FT-10                       | 1 x TP/XF-1250<br>2 x TP/FT-10 | 1 x TP/XF-1250<br>4 x TP/FT-10 | 2 x TP/XF-1250<br>3 x TP/FT-10 |
| Tools                | Configuration via console RS-232 (EIA-232)                                                |                                |                |                                    |                                |                                |                                |


## Order number Product description

|            |                                                                                                         |
|------------|---------------------------------------------------------------------------------------------------------|
| LS-33CB    | L-Switch <sup>XP</sup> CEA-709 Router, 2 x TP/FT-10                                                     |
| LS-13CB    | L-Switch <sup>XP</sup> CEA-709 Router, 1 x TP/XF-1250, 1 x TP/FT-10                                     |
| LS-11CB    | L-Switch <sup>XP</sup> CEA-709 Router, 2 x TP/XF-1250                                                   |
| LS-33300CB | L-Switch <sup>XP</sup> CEA-709 Router, 3 x TP/FT-10                                                     |
| LS-13300CB | L-Switch <sup>XP</sup> CEA-709 Router, 1 x TP/XF-1250, 2 x TP/FT-10                                     |
| LS-13333CB | L-Switch <sup>XP</sup> CEA-709 Router, 1 x TP/XF-1250, 4 x TP/FT-10                                     |
| LS-11333CB | L-Switch <sup>XP</sup> CEA-709 Router, 2 x TP/XF-1250, 3 x TP/FT-10                                     |
| LPOW-2415B | Power supply unit with power connector 24 VDC, 15 W                                                     |
| LT-03      | Network terminator, 1 x TP/FT-10 or TP/LPT-10 (bus or free topology), 1 x Network Access Connector RJ45 |
| LT-13      | Network terminator, 1 x TP/FT-10 or TP/LPT-10 (bus or free topology), 1 x TP/XF-1250                    |
| LT-33      | Network terminator, 2 x TP/FT-10 or TP/LPT-10 (bus or free topology)                                    |

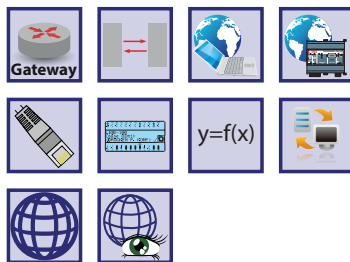

LOYTEC NICs are the most universal network interfaces for CEA-709 and IP-852 (Ethernet/IP) channels. Based on LOYTEC's Core Technologies, they offer high packet rates and short response times. All NICs are fully compatible with products like NL220, ALEX, LonMaker®, and other LNS® applications. The NICs are also compatible with NodeUtil32, NLUtil, OPC servers, and high performance ORION applications.

The multiplexed network interface (MNI) support allows starting multiple LNS® or MIP applications to run in parallel with an LPA on a single network interface.

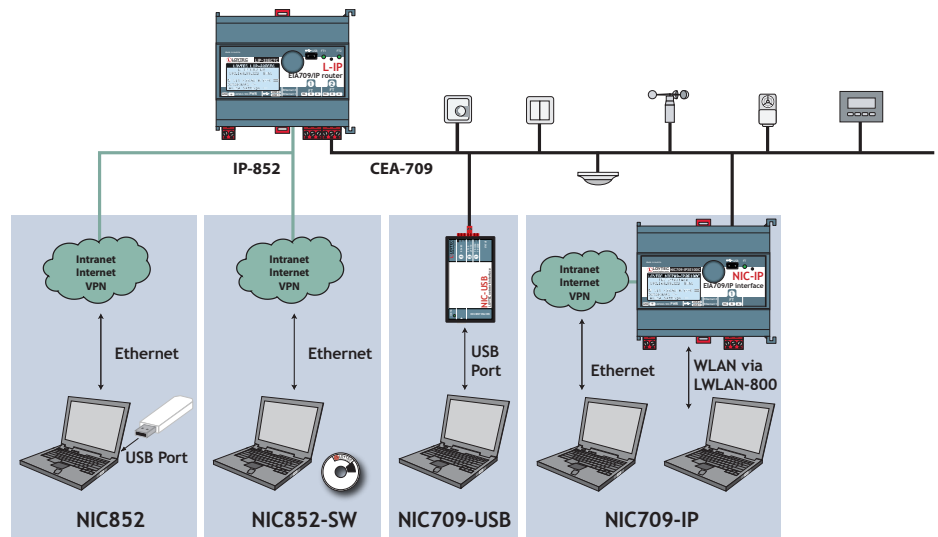

## Features

- Network interface for TP/FT-10, TP/XF-1250, RS485, and Ethernet/IP (IP-852) channels
- Available for USB and Ethernet port
- Create up to eight network nodes with a single network interface (MNI devices)
- Use the LPA, LSD Tool, your ORION applications, MIP applications, and LNS® (VNI) applications on a single network interface at the same time
- Compatible with BMS e.g. Honeywell EBI, TAC VISTA, etc.
- Compatible with LNS® applications in high performance VNI™ mode e.g. NL220, NLFacilities, NLOPC-VNI, ALEX, LonMaker®, etc.
- Compatible with MIP applications (LDV interface) e.g. NodeUtil32, NLUtil, NLOPC-MIP, Honeywell CARE 5/7, etc.
- Compatible with high performance ORION applications (ORION API)
- NIC852 is fully compatible with L-IP and i.LON® 600 Internet routers
- Use legacy MIP applications together with the IP-852 (Ethernet) channel
- With dual Ethernet, switched or separated (only NIC709-IP3E100C, NIC709-IP1E100C)
- Supports WLAN with LWLAN-800 Interface (only NIC709-IP3E100C, NIC709-IP1E100C)
- Runs on Windows 7, Windows 8, Windows 10, Windows Server 2003 (32-bit), Windows Server 2008, Windows Server 2012

# NIC709-IP3E100C, NIC709-IP1E100C, NIC709-USB100, NIC852-SW, NIC852

## Specifications NIC709-USB100

|                      |                                                                                                             |
|----------------------|-------------------------------------------------------------------------------------------------------------|
| Type                 | <b>NIC709-USB100</b>                                                                                        |
| Dimensions (mm)      | 120 x 70 x 23 (L x W x H), DIM052                                                                           |
| Power supply         | Via USB, max. 130 mA                                                                                        |
| Operating conditions | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals)                   |
| Interfaces           | 1 x TP/FT-10<br>1 x TP/XF-1250<br>1 x RS-485 (ANSI TIA/EIA-485)                                             |
| Tools                | LOYTEC Network Interface NIC software                                                                       |
| Operating system     | Windows 7, Windows 8, Windows 10, Windows Server 2003 (32-bit),<br>Windows Server 2008, Windows Server 2012 |

## Resource limits

|             |                                    |
|-------------|------------------------------------|
| MNI devices | 8 (multiplexed network interfaces) |
|-------------|------------------------------------|

## Specifications NIC709-IP3E100C (successor of NIC709-IP3E100) and NIC709-IP1E100C (successor of NIC709-IP1E100)

|                      |                                                                                                                   |                        |
|----------------------|-------------------------------------------------------------------------------------------------------------------|------------------------|
| Type                 | <b>NIC709-IP3E100C</b>                                                                                            | <b>NIC709-IP1E100C</b> |
| Dimensions (mm)      | 107 x 100 x 75 (L x W x H), DIM046                                                                                |                        |
| Installation         | DIN rail mounting following DIN 43880, top hat rail EN 50022                                                      |                        |
| Power supply         | 12-35 VDC / 12-24 VAC ±10 %, typ. 2.5 W                                                                           |                        |
| Operating conditions | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals)                         |                        |
| Interfaces           | 2 x Ethernet (100Base-T):<br>HTTP, FTP, SSH, HTTPS, Firewall, NTP, VNC, SNMP<br>2 x USB-A: WLAN (needs LWLAN-800) |                        |
|                      | 1 x TP/FT-10                                                                                                      | 1 x TP/XF-1250         |
| Tools                | LOYTEC Network Interface NIC Software                                                                             |                        |
| Operating system     | Windows 7, Windows 8, Windows 10, Windows Server 2003 (32-bit),<br>Windows Server 2008, Windows Server 2012       |                        |

## Resource limits

|             |                                    |
|-------------|------------------------------------|
| MNI devices | 8 (multiplexed network interfaces) |
|-------------|------------------------------------|

## Specifications NIC852

|                  |                                                                                                             |
|------------------|-------------------------------------------------------------------------------------------------------------|
| Power supply     | Via USB, max. 50 mA                                                                                         |
| Interfaces       | 1 x USB PC connector                                                                                        |
| Tools            | LOYTEC Network Interface NIC software                                                                       |
| Operating system | Windows 7, Windows 8, Windows 10, Windows Server 2003 (32-bit),<br>Windows Server 2008, Windows Server 2012 |

## Resource limits

|             |                                    |
|-------------|------------------------------------|
| MNI devices | 8 (multiplexed network interfaces) |
|-------------|------------------------------------|

| Order number    | Product description                                                                                        |
|-----------------|------------------------------------------------------------------------------------------------------------|
| NIC709-USB100   | USB interface, connects to the USB port of a PC, supports LonMark TP/FT-10, TP/XF-1250, TP/RS-485 channels |
| NIC709-IP3E100C | Remote network interface (RNI), PC connection via Ethernet or WLAN, for a LonMark TP/FT-10 channel         |
| NIC709-IP1E100C | Remote network interface (RNI), PC connection via Ethernet or WLAN, for a LonMark TP/XF-1250 channel       |
| NIC852          | Floating license via USB hardlock key, uses Ethernet port of PC to connect to LonMark IP-852 channel       |
| NIC852-SW       | Software license for one PC, uses Ethernet port of PC to connect to LonMark IP-852 channel                 |
| LPOW-2415B      | Power supply unit with power connector 24 VDC, 15 W                                                        |
| LWLAN-800       | Wireless LAN Interface IEEE 802.11bgn                                                                      |
| LT-03           | Network terminator, 1 x TP/FT-10 or TP/LPT-10 (bus or free topology), 1 x Network Access Connector RJ45    |
| LT-13           | Network terminator, 1 x TP/FT-10 or TP/LPT-10 (bus or free topology), 1 x TP/XF-1250                       |
| LT-33           | Network terminator, 2 x TP/FT-10 or TP/LPT-10 (bus or free topology)                                       |




## LPA-SET-USB, LPA-USB, LPA-IP, LPA-SW, LPA-IP-SW

Datasheet #89010519




The LOYTEC Protocol Analyzer (LPA) for LonMark Systems captures all data packets on CEA-709 or IP-852 networks and displays all recorded packets on a PC screen. The LPA software provides a comprehensive set of functions and methods to view, filter, and analyze data packets down to bit level.

The long time recording capability helps to find even intermittent faults on the network. When the system is configured by an LNS based tool, the LPA software can browse the database in order to display the node and network variable names. Together with all LOYTEC devices featuring a Remote Network Interface (RNI), the LPA software can record packets even from remote twisted-pair channels.

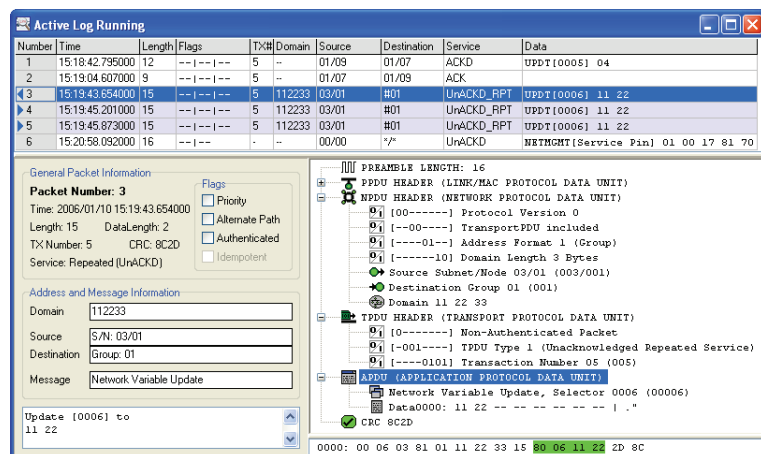

With a single mouse-click, the built-in report function creates reports (text files) showing the health condition of the investigated channel and gives hints and tips on how to solve problems on this channel.

The intuitive and easy-to-use LPA software runs on all LOYTEC network interfaces. On the NIC852 network interfaces, it supports the remote LPA functionality. Each LPA-SW license must be registered for one LOYTEC NIC.

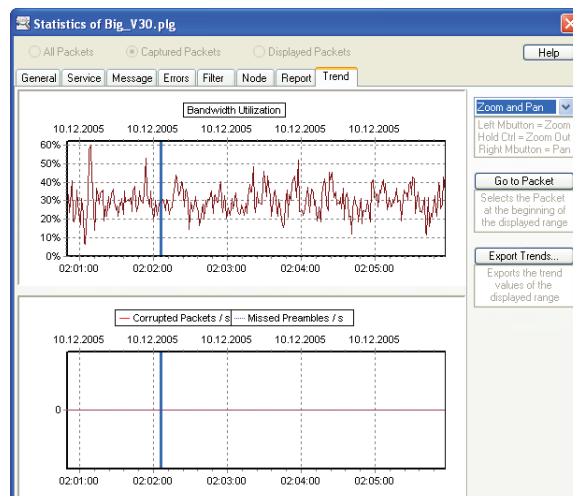

### Features

- Online CEA-709.1 packet monitoring in LonMark Systems
- Packet interpretation down to bit-level
- High resolution packet time-stamping
- Advanced, context specific packet filter and converter manipulation
- Conversion of network addresses and variables into symbolic names
- Advanced Transaction Identification
- Integrated Node Statistics for all detected domains, subnets, nodes, and groups
- Extensive packet statistics (short packets, CRC errors, packets/s, etc.)
- Statistic report function including hints and tips for solving network problems
- Statistic report plug-in interface for localization or customization of the statistic report
- Trend Logging for bandwidth utilization and packet errors
- LNS® database interpretation
- Interpretation of SNVTs, network management, and diagnostic messages
- Displays SNVTs in ISO and Imperial US system
- Long-term packet recording capability and error tracking in packets with protocol errors
- Remote LPA function (needs LPA-IP, LPA-SET-USB or LPA-IP-SW plus NIC852) with L-IP, NIC709-IP, LVIS-3E100, LVIS-3ME7-Gx, LVIS-3ME12-Ax, LVIS-3ME15-Ax, LVIS-3ME15-Gx, LINX-10x, LINX-11x, LINX-12x, LINX-15x, LROC-10x, LGATE-902, LGATE-95x

### Specifications

|                        |                                                                                                          |
|------------------------|----------------------------------------------------------------------------------------------------------|
| LPA-SW for use with    | NIC709-USB100, NIC709-IP3E100C, NIC709-IP1E100C                                                          |
| LPA-IP-SW for use with | NIC852, NIC852-SW                                                                                        |
| Operating system       | Windows 7, Windows 8, Windows 10, Windows Server 2003 (32-bit), Windows Server 2008, Windows Server 2012 |


| Order number | Product description                                                                                                                                                                                                                                       |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LPA-SET-USB  | Set contains:<br>Network Interface NIC709-USB100 and NIC852<br>Protocol Analyzer Software LPA-IP-SW for IP-852 channels, supports remote LPA, registered to NIC852<br>Protocol Analyzer Software LPA-SW for CEA-709 channels, registered to NIC709-USB100 |
| LPA-USB      | Set contains:<br>Network Interface NIC709-USB100<br>LPA-SW Protocol Analyzer Software for CEA-709 channels, registered to NIC709-USB100                                                                                                                   |
| LPA-IP       | IP-852 Channel Protocol Analyzer bundle contains:<br>Network Interface NIC852<br>Protocol Analyzer Software LPA-IP-SW for IP-852 channels, supports remote LPA, registered to NIC852                                                                      |
| LPA-SW       | Protocol Analyzer Software, supports all NIC709 network interfaces, NIC709 not included                                                                                                                                                                   |
| LPA-IP-SW    | Protocol Analyzer Software for IP-852 channels, supports Remote LPA functionality, NIC852 not included                                                                                                                                                    |



# Interfaces






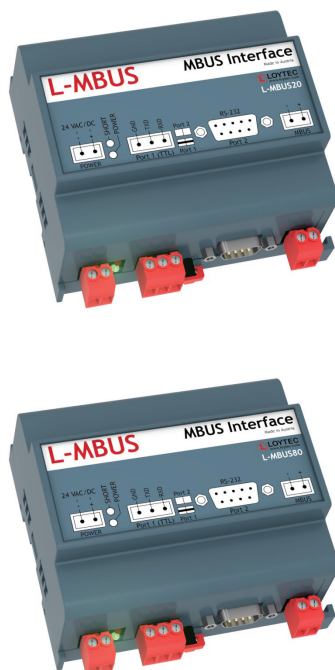

The L-MBUS level converters are used to connect an M-Bus network to a LOYTEC device. Up to 20 or 80 M-Bus devices can be connected via L-MBUS20 or L-MBUS80.


## TTL Connection

The TTL port is used to connect the L-MBUS to the EXT port of L-INX Automation Servers, L-ROC Room Controllers, and also to the L-GATE Gateways. The interface is galvanically isolated.

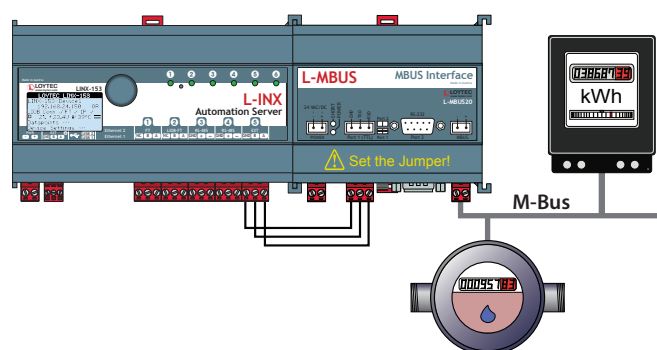

## RS-232 Connection

The RS-232 port is used for connecting the M-Bus Level Converter to the CEA-709 Automation Servers LINX-100, LINX-101, LINX-110, and LINX-111 or BACnet Automation Servers LINX-200, LINX-201, LINX-210, and LINX-211. The wiring is done with an L-CABLE1. The interface is galvanically isolated.

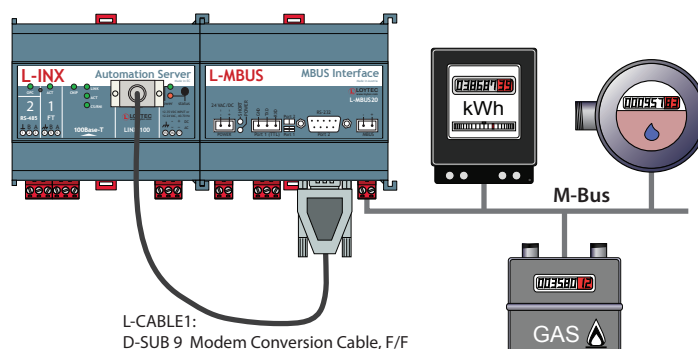

## General Specifications

|                      |                                                                                           |
|----------------------|-------------------------------------------------------------------------------------------|
| Dimensions (mm)      | 107 x 100 x 60 (L x W x H), DIM024                                                        |
| Installation         | DIN rail mounting following DIN 43880, top hat rail EN 50022                              |
| Power supply         | 24 VDC / 24 V AC $\pm 10\%$                                                               |
| Operating conditions | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals) |

## Specifications

| Type              | L-MBUS20                                                                                        | L-MBUS80                                                            |
|-------------------|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|
| Power consumption | 9.6 W                                                                                           | 14.4 W                                                              |
| Baud rate         | 300 to 9600 baud                                                                                | 300 to 9600 baud                                                    |
| Interfaces        | 1 x TTL or 1 x RS-232 (EIA-232), galvanically isolated<br>1 x M-Bus                             | 1 x TTL or 1 x RS-232 (EIA-232), galvanically isolated<br>1 x M-Bus |
| For use with      | L-INX Automation Servers, L-ROC Room Controllers, L-GATE Gateways, LIOB-586/588/589 Controllers |                                                                     |


## Resource limits

|               |          |          |
|---------------|----------|----------|
| M-Bus devices | Up to 20 | Up to 80 |
|---------------|----------|----------|

## Order number Product description

|          |                                                                                                    |
|----------|----------------------------------------------------------------------------------------------------|
| L-MBUS20 | M-Bus level converter for 20 M-Bus devices                                                         |
| L-MBUS80 | M-Bus level converter for 80 M-Bus devices                                                         |
| L-CABLE1 | Connection cable between LINX-x00/x01/x10/x11 Automation Server and L-MBUSx0 M-Bus level converter |





The LMPBUS-804 connects up to four MP-Bus channels with up to 64 MP-Bus slaves to the USB port of the L-INX Automation Server, L-ROC Controller or L-GATE Gateway Controller.


MP-Bus stands for Multi Point Bus. It is the Belimo Master/Slave bus system. The MP-Bus allows to connect up to 8 slaves to a master unit. By exclusively using latest design actuators (e.g. ...MPL) it is possible to connect up to 16 slaves. The advantages of this bus include reduced wiring expenses and substantially higher functionality. Furthermore one sensor can be connected per MP-Bus slave. These sensors include active sensors, passive resistances sensors and switches.

The sensor values can be read over the MP-Bus network.

## Features

- MP-Bus Interface for L-INX, L-ROC, and L-GATE Controller
- Configuration through web interface
- 16 devices per channel, up to 4 channels
- Easy device replacement

## Control up to 16 channels

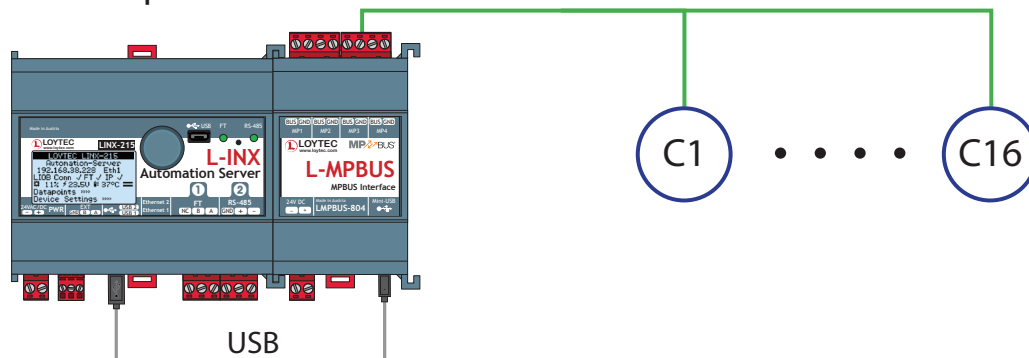


## Specifications

| Type                 | LMPBUS-804                                                                                |
|----------------------|-------------------------------------------------------------------------------------------|
| Dimensions (mm)      | 55 x 100 x 60 (L x W x H), DIM051                                                         |
| Installation         | DIN rail mounting following DIN 43880, top hat rail EN 50022                              |
| Power supply         | 24 VDC / 24 VAC $\pm 10\%$ , typ. 2.5 W                                                   |
| Operating conditions | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals) |
| Installation         | Connected with a standard USB 2.0 cable, max. 1 m                                         |
| Interfaces           | 1 x Mini USB 2.0 Type B<br>4 x MP-Bus                                                     |
| Tools                | Configuration via web interface                                                           |
| For use with         | L-INX Automation Servers, L-ROC Room Controllers and L-GATE Gateways                      |
| Order number         | Product description                                                                       |
| LMPBUS-804           | MP-Bus interface for 16 devices per channel, up to 4 channels                             |



The KNX-Interface LKNX-300 allows the L-INX Automation Servers, the L-ROC Room Controllers, and the L-GATE Universal Gateways to interface to KNX devices connected to a KNX TP1 Bus. The LKNX-300 Interface needs to be connected to the EXT-Port on the L-INX/L-ROC/L-GATE devices.

For the KNX integration, LOYTEC’s L-INX/L-ROC/L-GATE devices use an ETS4/ETS5 project. The project data is exported from the ETS4/ETS5 software and then imported in the LOYTEC L-INX Configurator. Thus, up to 250 or 1000 data points from the KNX network can be used by the L-INX/L-ROC/L-GATE devices on each port supporting KNXnet/IP or KNX TP1.

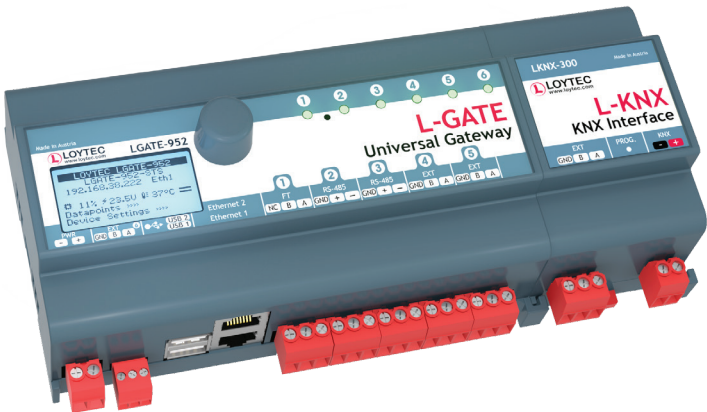

Features

- KNX TP1 Interface for L-INX, L-ROC, and L-GATE
- Access to a maximum of 250 or 1000 KNX data points via KNX TP1 (L-INX/L-ROC/L-GATE)
- Configurable through ETS4/ETS5 software via XML import
- Connected to the L-INX Automation Server, L-ROC Room Controller, or L-GATE Gateway via port EXT

| Specifications       |                                                                                           |
|----------------------|-------------------------------------------------------------------------------------------|
| Dimensions (mm)      | 55 x 100 x 60 (L x W x H), DIM028                                                         |
| Installation         | DIN rail mounting following DIN 43880, top hat rail EN 50022                              |
| Power supply         | Via the KNX TP1 bus                                                                       |
| Operating conditions | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals) |
| Installation         | Attachable or connected with a 3-wire cable, max. 1 m                                     |
| Interfaces           | 1 x EXT<br>1 x KNX TP1<br>LIOB-Connect is looped through the device                       |
| Baud rate            | 9600 baud                                                                                 |
| Tools                | L-INX Configurator                                                                        |
| Frequency            | 2400 ~ 2497 MHz                                                                           |
| RF Output Power      | 18 (±2) dBm                                                                               |
| For use with         | L-INX Automation Servers, L-ROC Room Controllers, L-GATE Universal Gateways               |
| Order number         | Product description                                                                       |
| LKNX-300             | KNX interface to connect KNX TP1 devices                                                  |

## LENO-800, LENO-801, LENO-802

Datasheet #89032519



The L-ENO EnOcean Interface integrates wireless self-powered sensors and micro-energy devices seamlessly into building automation with the use of L-INX Automation Servers, the L-ROC Room Controller, the LIOB-AIR Controller, the L-GATE Universal Gateways and the L-DALI Controller. The L-ENO Interface only needs to be connected to the USB port. The L-ENO device is bus-powered over USB and detected automatically.

The L-ENO EnOcean Interfaces are available in three different versions for world-wide use:

- LENO-800 Europe 868 MHz band
- LENO-801 USA/Canada 902 MHz band
- LENO-802 Japan 928 MHz band

## Features

- EnOcean Interface for L-INX, L-ROC, LIOB-AIR, L-DALI and L-GATE
- Supports all common EnOcean Profiles (EEPs) for sensors and actuators
- Configurable through device templates within the L-INX Configurator software
- Web interface for Teach-In, signal strength, and value test
- Easy device replacement
- External antenna included
- Connected to the L-INX Automation Server, L-ROC Room Controller, L-DALI Controller, L-GATE Gateway or LIOB-AIR Controllers via USB 2.0
- Support of multi-channel EnOcean devices
- Encrypted wireless connection if the EnOcean device supports this function
- Supports Mailbox function for sleepy actuators (e.g., battery-powered radiator valve)

## Specifications

| Type                 | LENO-800                                                                                                                                                                    | LENO-801    | LENO-802   |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|------------|
| Dimensions (mm)      | 27 x 89 x 60 (L x W x H) DIM037, EnOcean antenna DIM036                                                                                                                     |             |            |
| Installation         | DIN rail mounting following DIN 43880, top hat rail EN 50022<br>The external antenna has to be installed outside any metallized enclosure.                                  |             |            |
| Power supply         | Via the USB 2.0 bus connection                                                                                                                                              |             |            |
| Operating conditions | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals)                                                                                   |             |            |
| Installation         | Connected with a standard USB 2.0 cable, max. 5 m                                                                                                                           |             |            |
| Interfaces           | 1 x Mini USB 2.0 Type B<br>1 x EnOcean Wireless Interface confirming to ISO/IEC 14543-3-10<br>1 x SMA 50 Ohm, EnOcean antenna with 1.5 m connection cable and magnetic base |             |            |
| Frequency            | 868.3 MHz                                                                                                                                                                   | 902.875 MHz | 928.35 MHz |
| RF Output Power      | 3 dBm                                                                                                                                                                       | 1 dBm       | 0 dBm      |
| Data rate            | 125 kbit/s                                                                                                                                                                  |             |            |
| Tools                | L-INX Configurator                                                                                                                                                          |             |            |
| For use with         | L-INX Automation Servers, L-ROC Room Controllers, L-DALI Controllers, L-GATE Universal Gateways, LIOB-AIR Controllers                                                       |             |            |
| Order number         | Product description                                                                                                                                                         |             |            |
| LENO-800             | EnOcean Interface 868 MHz Europe                                                                                                                                            |             |            |
| LENO-801             | EnOcean Interface 902 MHz USA/Canada                                                                                                                                        |             |            |
| LENO-802             | EnOcean Interface 928 MHz Japan                                                                                                                                             |             |            |

## L-WLAN Wireless LAN Interface

# LWLAN-800

Datasheet #89032819



The L-WLAN Interface expands a LOYTEC device with a wireless LAN connection. The wireless LAN Interface LWLAN-800 can be used with L-INX Automation Servers, L-ROC Room Controllers, L-DALI Controllers, the L-GATE Universal Gateways, L-IP Routers of the series ECTC, NIC709-IP3E100C Remote Network Interfaces, and with most L-VIS Touch Panels. The L-WLAN Interface only needs to be connected to the USB port. Due to the USB bus, the L-WLAN device is energy supplied and detected automatically.

The L-WLAN Interface uses the protocol IEEE 802.11n improvements which significantly increase connection speed, is backward compatible to IEEE 802.11b & IEEE 802.11g, offers a link speed up to 150 Mbps, and an operation frequency/channel:

- USA (FCC) 11 Channels: 2.412 GHz ~ 2.462 GHz
- Europe (ETSI) 13 Channels: 2.412 GHz ~ 2.472 GHz
- Japan 13 Channels: 2.412 GHz ~ 2.472 GHz

After attaching an LWLAN-800 Interface to the USB port of the corresponding LOYTEC device, it is possible to connect it to an existing WLAN Access Point, create a WLAN Access Point, or build up a Mesh network (IEEE 802.11s). The relatively new and emerging standard for Mesh networks offers numerous advantages. A major benefit of a Mesh network is its autonomy. Mesh point configured devices unite autonomously to one network in which Mesh points communicate via other Mesh points. To encrypt a WLAN network the encryption methods WEP, WPA, and WPA2 are available. The Mesh network is encrypted via simultaneous authentication of equals (SAE), comparable to WPA2.

The supplied antennas have a radial gain of up to +2 dBi and have to be mounted outside any metallized housing. To avoid any interferences, please keep a minimum distance of 0.5 m to any electronic devices which also operate with high-frequency signals such as of transformers, ballasts, computers, etc.

### Features

- Configuration through web interface
- Increased range through MIMO (multiple-input and multiple-output) – exploiting multipath propagation
- Two external 2.4 GHz antennas included
- Possibility for connecting external antennas via 2 SMA sockets (50 Ω)
- Supports Mesh networking according to IEEE 802.11s
- Supports encryption WEP, WPA, and WPA2

### Specifications

| Type                 | LWLAN-800                                                                                                                                                                    |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimensions (mm)      | 27 x 89 x 60 (L x W x H), DIM038, Antenna DIM043                                                                                                                             |
| Installation         | DIN rail mounting following DIN 43880, top hat rail EN 50022<br>The WLAN antennas have to be installed outside any metallized housing.                                       |
| Power supply         | Via the USB 2.0 bus connection                                                                                                                                               |
| Operating conditions | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals)                                                                                    |
| Installation         | Connected with a standard USB 2.0 cable, max. 5 m                                                                                                                            |
| Interfaces           | 1 x SMA 50 Ohm, RX Antenna 2.4 GHz<br>1 x SMA 50 Ohm, TX/RX Antenna 2.4 GHz<br>2 x WLAN antenna magnetic base, cable length = 1 m<br>1 x USB 2.0 Type B                      |
| Frequency            | 2.4 GHz band                                                                                                                                                                 |
| Standard             | IEEE 802.11b, IEEE 802.11g, IEEE 802.11n, IEEE 802.11s                                                                                                                       |
| RF Output Power      | 18 dBm (63 mW) ±2 dBm                                                                                                                                                        |
| Tools                | Configuration via web interface                                                                                                                                              |
| For use with         | L-INX Automation Servers, L-GATE Gateways, L-ROC Room Controllers, L-DALI Controllers, LVIS-3ME7-Gx, LVIS-3ME12-Ax, LVIS-3ME15-Ax, LVIS-3ME15-Gx, LIP-xECTC, NIC709-IP3E100C |
| Order number         | Product description                                                                                                                                                          |
| LWLAN-800            | Wireless LAN Interface IEEE 802.11bgn                                                                                                                                        |





SMI is the acronym for Standard Motor Interface. SMI is a bus protocol used to control SMI sunblind motors for shading. Up to 16 motors can be connected to the bus. The L-SMI interface connects an SMI bus to a L-INX, L-ROC, L-GATE or L-DALI controller. Two SMI interface models are available.

The LSMI-800 connects a single SMI channel with up to 16 SMI motors to the EXT port of the L-INX, L-ROC or L-GATE controller. The bus power for the SMI bus is provided by the LSMI-800 interface but it is not galvanically isolated. Only SMI high voltage motors may be connected to the LSMI-800 interface.

The LSMI-804 connects up to four SMI channels with up to 64 SMI motors to the USB port of the L-INX, L-ROC, L-GATE or L-DALI controller. A galvanically isolated bus power for the SMI bus is provided by the LSMI-804 interface. Hence SMI high voltage or SMI low voltage motors may be connected to the LSMI-804 interfaces but high voltage and low voltage motors must not be mixed on one LSMI-804 interface. In addition to the four SMI bus channels, the LSMI-804 offers four relays controlled by the L-INX, L-ROC, L-GATE or L-DALI controller. Each relay can be used to cut power for the SMI motors on one channel if the motors are standing still. Cutting power when the motors are not moving reduces power consumption for SMI sunblind installations by more than 140 kWh per year for every channel.


## Features

- SMI Interface for L-INX, L-ROC, L-GATE and L-DALI Controller
- Configuration through web interface
- Calibration of the blind drives via web interface
- Up to 16 blind drives per SMI port
- Supports Standard Motor Interface, SMI bus systems according to Standard Motor Interface e.V. [www.standard-motor-interface.com](http://www.standard-motor-interface.com)
- Easy device replacement

## Specifications

| Type                 | LSMI-800                                                                                  | LSMI-804                                                      |
|----------------------|-------------------------------------------------------------------------------------------|---------------------------------------------------------------|
| Dimensions (mm)      | 55 x 100 x 60 (L x W x H), DIM033                                                         | 107 x 100 x 60 (L x W x H), DIM034                            |
| Installation         | DIN rail mounting following DIN 43880, top hat rail EN 50022                              |                                                               |
| Power supply         | 230 V AC, 50 Hz, max 2 W                                                                  | 85-240 V AC, 50/60 Hz, max 2 W                                |
| Operating conditions | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals) |                                                               |
| Installation         | Connected with a 3-wire cable, max. 1 m                                                   | Connected with a standard USB 2.0 cable, max. 1 m             |
| Interfaces           | 1 x EXT<br>1 x SMI (Standard Motor Interface)                                             | 1 x Mini USB 2.0 Type B<br>4 x SMI (Standard Motor Interface) |
| Digital Output (DO)  | -                                                                                         | 4 x Relay, 10 A                                               |
| Tools                | Configuration via web interface                                                           |                                                               |
| For use with         | L-INX Automation Servers, L-ROC Room Controllers, L-GATE Gateways and L-DALI Controllers  |                                                               |
| Order number         | Product description                                                                       |                                                               |
| LSMI-800             | Standard Motor Interface for 16 motors via EXT port                                       |                                                               |
| LSMI-804             | Standard Motor Interface for 64 motors, 4 SMI channels via USB                            |                                                               |

Control up to 16 motors

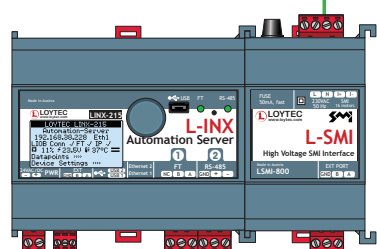


SMI



Sunblind Motors



Control up to 64 motors

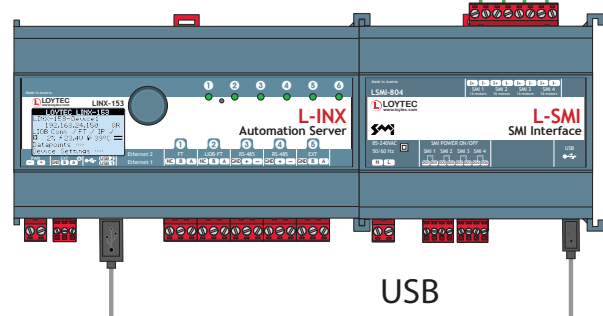

USB

(L-DALI, L-GATE)

SMI 1



SMI 2




SMI 3



SMI 4



Cut-off power when motor is stopped

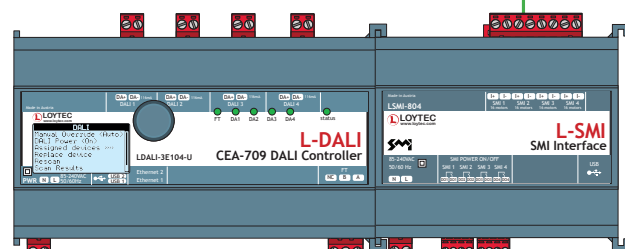

(L-INX, L-GATE, L-DALI)

SMI 1 .... 4







# Accessories

## L-POW Power Supply


# LPOW-2415A, LPOW-2415B, LPOW-2460B

Datasheet #89027719




### LPOW-2415A

LPOW-2415A is used to supply power to LOYTEC devices with the LOYTEC LIOB-Connect side outlet such as the L-INX Automation Servers, L-ROC Room Controllers, L-GATE Universal Gateways, and LIP-ME204. Additionally, all L-IOB I/O Modules and Controllers can be powered by the LPOW-2415A.

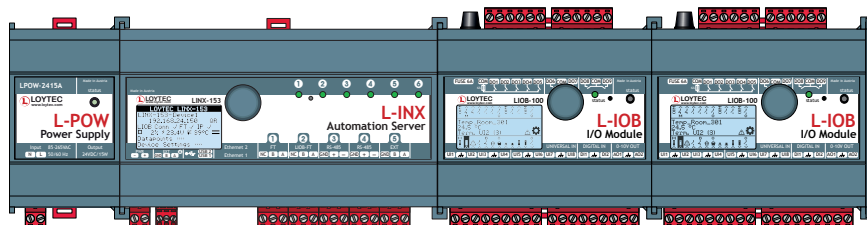

### LPOW-2415B

The power supply LPOW-2415B provides 24 VDC via a plug-in screw terminal. It is used to supply power to LOYTEC devices with a separate power terminal of 24 VDC.



### Energy Efficient

The LPOW-2415 are highly efficient switching power supplies. Their efficiency is approximately 80 %. The input voltage range of 85–240 VAC (50–60 Hz) allows worldwide use.

### LPOW-2460B


The LPOW-2460B power supply provides 24 VDC and maximum 60 W with screw terminals. It is used to supply power to LOYTEC devices with a separate power terminal of 24 VDC.

### Specifications

| Type                 | LPOW-2415A                                                                                                                                                                                             | LPOW-2415B                                                  | LPOW-2460B                                                                          |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Dimensions (mm)      | 55 x 100 x 60 (L x W x H), DIM025, DIM026                                                                                                                                                              |                                                             | 71 x 91 x 55.6 (L x W x H), DIM050                                                  |
| Installation         | DIN rail mounting following DIN 43880, top hat rail EN 50022                                                                                                                                           |                                                             |                                                                                     |
| Input voltage        | 85 – 240 VAC, 50 – 60 Hz                                                                                                                                                                               |                                                             | 100 – 240 VAC, 50 – 60 Hz                                                           |
| Supply voltage       | 24 VDC 15 W via LIOB-Connect                                                                                                                                                                           | 24 VDC 15 W with plugable screw terminals                   | 24 VDC 60 W with screw terminals                                                    |
| Operating conditions | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals)                                                                                                              |                                                             | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP20 (terminals) |
| For use with         | LIOB-Connect devices for power supply with 24 VDC, max. 15 W (625 mA):<br>L-INX Automation Servers,<br>L-ROC Room Controllers, L-GATE Universal Gateways, LIP-ME204, L-IOB I/O Modules and Controllers | Devices for power supply with 24 VDC and max. 15 W (625 mA) | Devices for power supply with 24 VDC and max. 60 W (2.5 A) Maximum 6 devices        |
| Order number         | Product description                                                                                                                                                                                    |                                                             |                                                                                     |
| LPOW-2415A           | LIOB-Connect power supply unit, 24 VDC, 15 W                                                                                                                                                           |                                                             |                                                                                     |
| LPOW-2415B           | Power supply unit with power connector 24 VDC, 15 W                                                                                                                                                    |                                                             |                                                                                     |
| LPOW-2460B           | Power supply unit with power connector 24 VDC, 60 W                                                                                                                                                    |                                                             |                                                                                     |



# LBOX-600, LBOX-ROC1, LBOX-ROC2

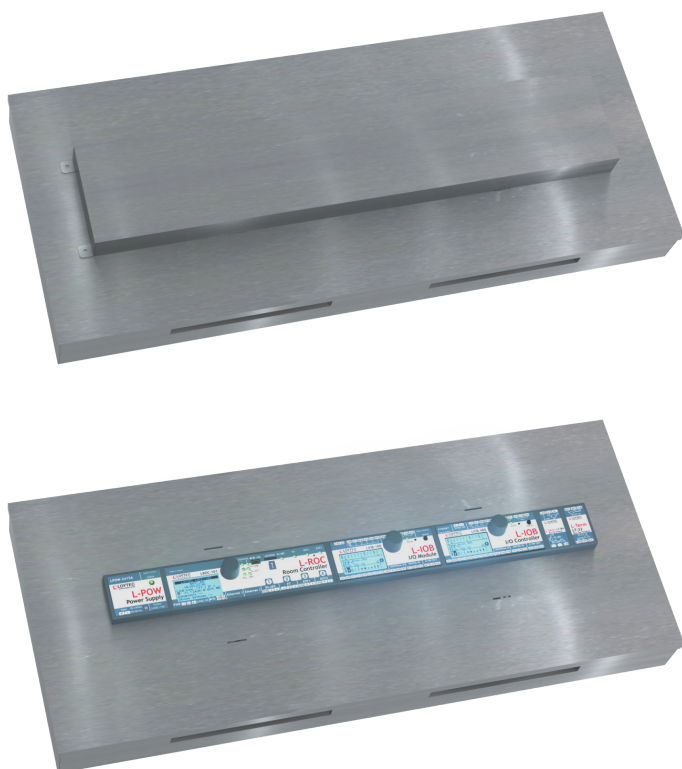


With L-BOX System Distribution Boxes, LOYTEC offers the possibility of a decentralized installation of hardware components, e.g. for the flexible room automation system L-ROC.

For the typical requirements of room automation projects with reoccurring segments, the hardware designed for a certain amount of segments (e.g. 8 or 16 segments, usually I/O modules) can be installed in L-BOX. L-BOX is normally mounted in an intermediate ceiling or double floor. The cabling of the field components in the segment (sun-blind motor, actuators for valves, window contacts etc.) can be connected to the L-BOX in a star topology. In the L-BOX, the cables are strain-relieved and directly wired to the I/O modules.

## Specifications LBOX-600

| Dimensions (mm)     | 600 x 250 x 82 (L x W x H), DIM049                                                             |
|---------------------|------------------------------------------------------------------------------------------------|
| Device Installation | 485 mm long, top hat rail (35 mm wide) for snap-on mounting of equipment (EN 50022)            |
| Material            | Metal, DC01 Sendzimir galvanized                                                               |
| Order number        | Product description                                                                            |
| LBOX-600            | L-BOX System Distribution Box for room automation components, 600 x 250 x 82 (L x W x H in mm) |

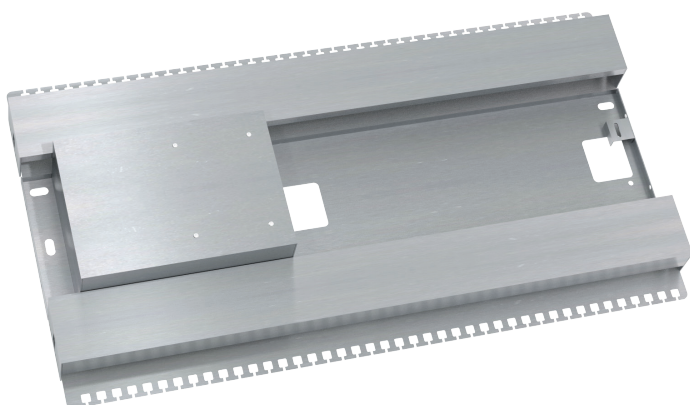

## LBOX-ROC1, LBOX-ROC2

The LBOX-ROC1 and the LBOX-ROC2 are designed to ease hardware installation and cabling of LROC-40x room automation projects.

It consists of built-in terminals and strain reliefs, and it is normally mounted in an intermediate ceiling or double floor.

The LBOX-ROC2 has the same features as the LBOX-ROC1, but instead of the 75mm DIN rail it has a built-in 60W 24 VDC power supply.

## Specifications LBOX-ROC1, LBOX-ROC2

| Dimensions (mm)     | 519 x 280 x 71 (L x W x H), DIM048                                                             |
|---------------------|------------------------------------------------------------------------------------------------|
| Device Installation | suitable for the installation of an LROC-400, LROC-401, or LROC-402 Room Controller            |
| Material            | Metal, DC01 Sendzimir galvanized                                                               |
| Input voltage       | 100 – 240 VAC, 50 – 60 Hz (LBOX-ROC2 only)                                                     |
| Supply voltage      | 24 VDC 60 W (LBOX-ROC2 only)                                                                   |
| Order number        | Product description                                                                            |
| LBOX-600            | L-BOX System Distribution Box for room automation components, 600 x 250 x 82 (L x W x H in mm) |
| LBOX-ROC1           | System Distribution Box for LROC-40x Room Controller, 519 x 280 x 71 (L x W x H in mm)         |
| LBOX-ROC2           | System Distribution Box for LROC-40x Room Controller, 60 W 24 VDC power supply                 |

L-Term Network Terminator

LT-03, LT-13, LT-33

Datasheet #89014719

BACnet  
✓ CEA-709  
KNX

Modbus  
M-Bus  
OPC




LOYTEC offers several network terminators in DIN rail housing for the LonMark TP/FT-10 and TP/XF-1250 channels.

L-Term LT-03 offers one standard network terminator for a TP/FT-10 or TP/LPT-10 channel supporting bus and free topology. In addition, LT-03 comes with a network access connector (RJ45) for a simple and reliable connection to the CEA-709 network e.g. for maintenance or analyzing the network locally.

L-Term LT-33 offers two standard network terminators for TP/FT-10 or TP/LPT-10 channels in bus and free topology. LT-33 is the perfect solution for LOYTEC network infrastructure products (e.g. L-IP, L-Switch<sup>XP</sup>, L-Proxy etc.).

L-Term LT-13 combines a terminator for a TP/FT-10 or TP/LPT-10 channel in bus or free topology with a terminator for a TP/XF-1250 channel. LT-13 is the perfect solution to be used together with the LS-13CB, LS-13300CB, or the LS-13333CB L-Switch<sup>XP</sup>.

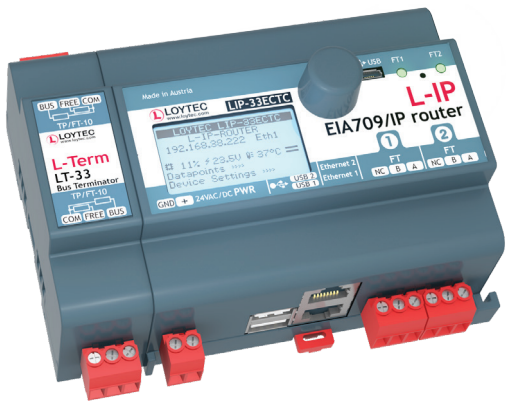

| Specifications       |                                                                                                         |
|----------------------|---------------------------------------------------------------------------------------------------------|
| Dimensions (mm)      | 27 x 89 x 60 (L x W x H), DIM027                                                                        |
| Installation         | DIN rail mounting following DIN 43880, top hat rail EN 50022                                            |
| Operating conditions | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals)               |
| Order number         | Product description                                                                                     |
| LT-03                | Network terminator, 1 x TP/FT-10 or TP/LPT-10 (bus or free topology), 1 x Network Access Connector RJ45 |
| LT-13                | Network terminator, 1 x TP/FT-10 or TP/LPT-10 (bus or free topology), 1 x TP/XF-1250                    |
| LT-33                | Network terminator, 2 x TP/FT-10 or TP/LPT-10 (bus or free topology)                                    |


✓ BACnet  
CEA-709  
KNX

✓ Modbus  
M-Bus  
OPC

L-Term Network Terminator

LT-04, LT-B4


Datasheet #89016319

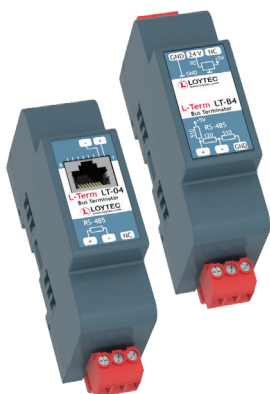

LOYTEC offers network terminators for RS-485 channels (ANSI TIA/EIA-485) such as BACnet MS/TP, Modbus RTU, or TP/RS485 (CEA-709) in DIN rail housings.

L-Term LT-04 is a terminator for RS-485 channels. In addition, LT-04 comes with a network access connector (RJ45) for a simple and reliable connection to the network e.g. for maintenance or analyzing the network locally.

The LT-B4 is a bus terminator for an RS-485 channel with biasing circuit (failsafe biasing). This biasing circuit draws the level of the bus during standby mode (idle) to a safe value (logic "1"). The LT-B4 needs a power supply of 24 V AC or 24 VDC.

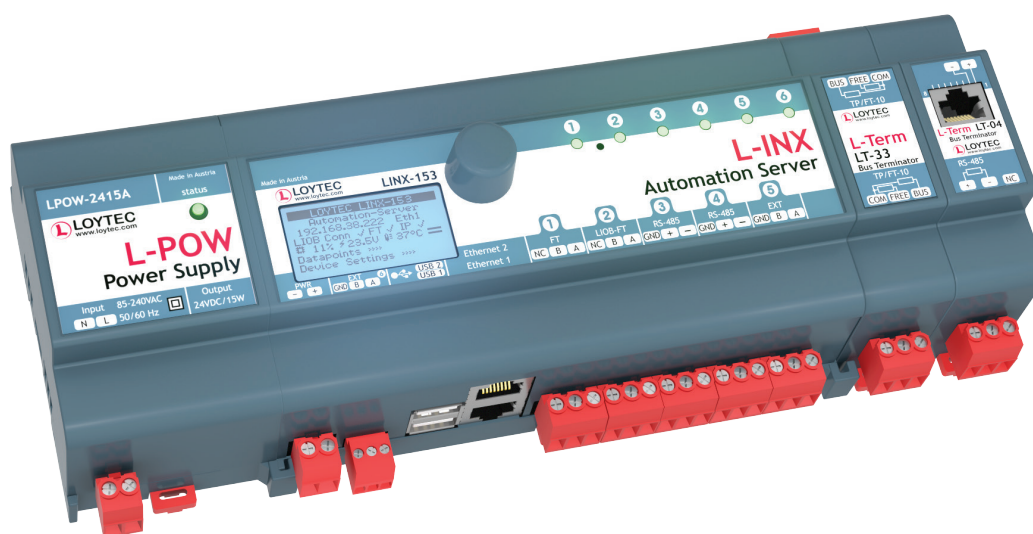

## Specifications

| Type                      | LT-04                                                                                                   | LT-B4                       |
|---------------------------|---------------------------------------------------------------------------------------------------------|-----------------------------|
| Power supply              | –                                                                                                       | 24 VDC or 24 VAC $\pm 10\%$ |
| Dimensions (mm)           | 27 x 89 x 60 (L x W x H), DIM027                                                                        |                             |
| Installation              | DIN rail mounting following DIN 43880, top hat rail EN 50022                                            |                             |
| Operating conditions      | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals)               |                             |
| Termination impedance (Z) | 120 $\Omega$                                                                                            |                             |
| Order number              | Product description                                                                                     |                             |
| LT-04                     | Network terminator, 1 x RS-485 (bus topology, ANSI TIA/EIA-485), 1 x Network Access Connector RJ45      |                             |
| LT-B4                     | Network terminator, 1 x RS-485 (bus topology, ANSI TIA/EIA-485) with biasing circuit (failsafe biasing) |                             |

Functions

L-WEB, L-STUDIO

L-ROC

L-INX

L-IOB

Gateways

L-VIS, L-STAT

L-DALI

Routers, NIC


Interfaces

Accessories

## L-IOB Adapter

# LIOB-A2, LIOB-A4, LIOB-A5

Datasheet #89028319

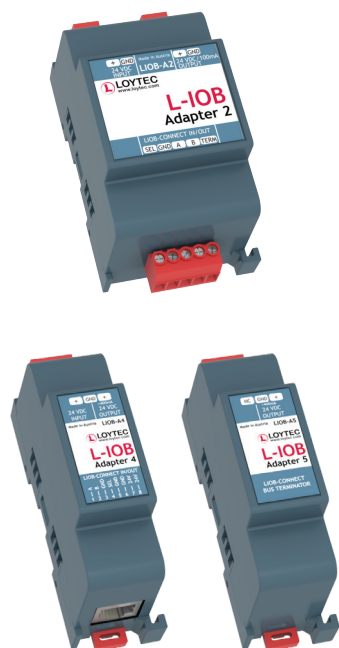


The LIOB-A2/A4 Adapters can be used to extend the LIOB-Connect bus and to connect an external power supply.

The LIOB-A5 Adapter is a terminator of the LIOB-Connect bus at the end of the last segment. A terminator is needed if the total length of the bus exceeds 1 m.

24 LIOB-Connect I/O Modules can be connected through the LIOB-Connect bus. Up to 4 LIOB-Connect I/O Modules can be plugged directly using the built-in LIOB-Connect plug. If more than 4 modules are to be used, the LIOB-Connect chain must be split into two (or more) segments of modules using LIOB-A2 and 4-wire cables (SEL, GND, A, B), or LIOB-A4 Adapters and standard RJ45 network cables. Each segment needs an external power supply, e.g. LPOW-2415A. This means that with a full configuration of 24 LIOB-Connect I/O Modules, five additional power supplies and 10 LIOB-A2/A4 adapters are required.

If the length exceeds 1 m, either a LIOB-A2 Adapter or a LIOB-A5 adapter must be used at the end of the last segment as a termination. When using the LIOB-A2 adapter as network terminator, the terminal TERM has to be connected with terminal B.


Additionally, the L-IOB Adapters have a power output usable for external devices limited to 100 mA (LIOB-A2) or 400 mA (LIOB-A4/A5).

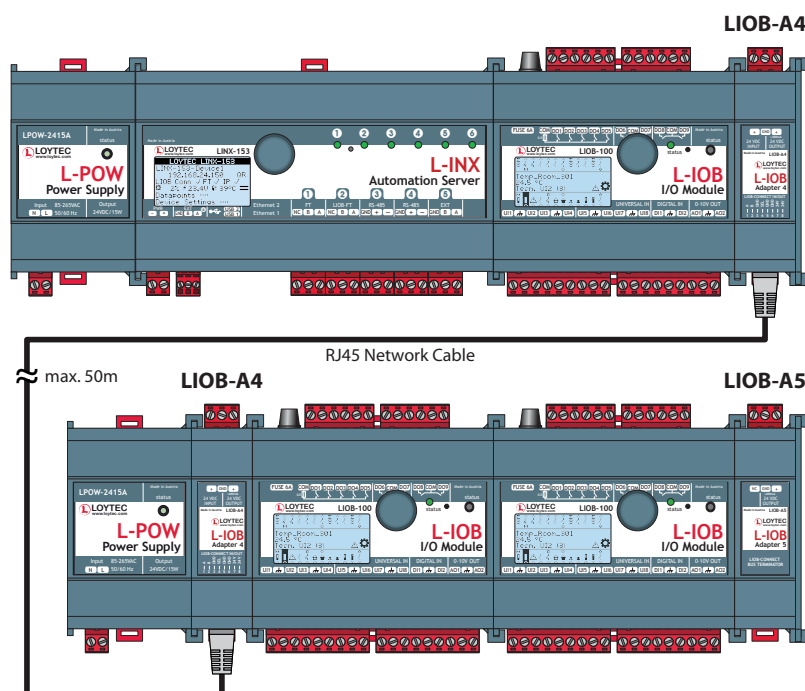

## Specifications

| Type                 | LIOB-A2                                                                                         | LIOB-A4                                       | LIOB-A5 |
|----------------------|-------------------------------------------------------------------------------------------------|-----------------------------------------------|---------|
| Dimensions (mm)      | 55 x 100 x 60 (L x W x H), DIM029                                                               | 27 x 100 x 60 (L x W x H), DIM030, DIM031     |         |
| Installation         | DIN rail mounting following DIN 43880, top hat rail EN 50022                                    |                                               |         |
| Input voltage        | 24 VDC $\pm 10\%$ , either with L-POW Power Supply through LIOB-Connect or with input terminals |                                               | -       |
| Output voltage       | 24 VDC, < 100 mA with plugable screw terminal                                                   | 24 VDC, < 400 mA with plugable screw terminal |         |
| Operating conditions | 0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals)       |                                               |         |
| For use with         | LIOB-Connect Modules (LIOB-10x)                                                                 |                                               |         |
| Order number         | Product description                                                                             |                                               |         |
| LIOB-A2              | L-IOB Adapter 2 to split the LIOB-Connect bus using 4-wire cables                               |                                               |         |
| LIOB-A4              | L-IOB Adapter 4 to split the LIOB-Connect bus using RJ45 network cables                         |                                               |         |
| LIOB-A5              | L-IOB Adapter 5 to terminate the LIOB-Connect bus                                               |                                               |         |





The DVS-110W02-3SFP Managed 10-Port Ethernet Switch provides many essential features. Its enhanced hardware design, the user-friendly software interface, the packet protection and compatibility with multiple industrial communication standards makes it a highly reliable active network component.

The DVS-110W02-3SFP provides two built-in redundant power supplies and together with its RSTP support it is the perfect fit for building up highly available Ethernet ring topologies for L-INX, L-IOB, and L-ROC controller.

It features a wide operating temperature range from -40°C to 75°C, and it is UL, CE, and FCC certified.

## Features

- IPv6 Network address for larger network and neighbor discovery
- Automatic IP assignment by DHCP/BootP server for easy network construction
- DHCP relay option 82 for sending DHCP requests with clients' identities to a DHCP server
- SNMP v1/v2c/v3 facilitates the exchange of management between network devices
- Support MODBUS TCP protocol that facilitates the remote management by SCADA and other industrial devices
- STP/RSTP/MSTP for network redundancy further ensures reliability
- QoS (IEEE 802.1p) and TOS/DSCP for mission-critical applications
- SNTP (simple network time protocol) for network clock synchronization
- Broadcast/Multicast/Unknown Unicast storm control improves throughput problems
- MAC addresses locking function per port blocks unauthorized access
- USB console interface for easy connection with laptops
- IGMP Snooping and GMVP prunes multicast traffic
- CPU utilization displays the amount of works the CPU handles
- DDM diagnosis function by SFP fiber module
- Auto warning by email, DI, relay, Syslog & SNMP trap
- Compatible with various industrial protocols, EtherNet/IP, Profinet, CC-LINK IE and DNP 3.0

## Specifications

|                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type                        | <b>DVS-110W02-3SFP</b>                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Dimensions (mm)             | 75 x 108.7 x 145.3 (L x W x H), DIM055                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Weight (g)                  | 564                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Standard Compliance         | IEEE 802.3 10Base-T, IEEE 802.3u 100Base-T(X) and 100Base-FX, IEEE 802.3ab 1000Base-T, IEEE 802.3z 1000Base-X, IEEE 802.3x Flow Control, IEEE 802.1D Spanning Tree Protocol, IEEE 802.1w Rapid Spanning Tree Protocol, IEEE 802.1s Multiple Spanning Tree Protocol, IEEE 802.1p Class of Service, Priority Protocols, IEEE 802.1Q VLAN Tagging, IEEE 802.1X Port Authentication, IEEE 802.3ad LACP Aggregation, IEEE 802.1AB Link Layer Discovery Protocol |
| Processing Type             | Store and Forward, IEEE 802.3x Flow control in full duplex                                                                                                                                                                                                                                                                                                                                                                                                 |
| Interface Fast Ethernet     | RJ45 Ports: 7 x 10/100Base-T(X), auto MDI/MDI-X, auto negotiation                                                                                                                                                                                                                                                                                                                                                                                          |
| Combo Ports                 | 3 Ports, either: RJ45 Ports 10/100/1000Base-T, auto MDI/MDI-X, auto negotiation or SFP Ports 100/1000Base-SFP                                                                                                                                                                                                                                                                                                                                              |
| Alarm Contacts              | 2 relay outputs<br>Carry current 5 A at 24 VDC                                                                                                                                                                                                                                                                                                                                                                                                             |
| Performance and Scalability | Switching Capacity: 7.4 Gbps                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Power Requirements          | Input Voltage: 2 sets, 12 to 48 VDC redundant terminal block power input<br>Input Current: max. 0.95A<br>Overload Current Protection, max. input current 3A<br>Reverse Polarity Protection<br>Buffer Time: min. 12ms at 24 VDC                                                                                                                                                                                                                             |
| Housing                     | IP40 aluminum metal case                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Installation                | Industrial DIN-Rail and wall mounting                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Operating conditions        | Operating Temperature: -40°C to 75°C (-40 °F to 167 °F)<br>Storage Temperature: -40°C to 85°C (-40 °F to 185 °F)<br>Ambient Relative Humidity: 5% to 95% (non-condensing)                                                                                                                                                                                                                                                                                  |
| Approvals                   | Safety: UL 508, EN 60950-1, IEC 61131-2<br>EMI: FCC 47 CFR Part 15 Subpart B Class A, IEC 61000-6-4, EN 55022<br>EMS: IEC 61000-6-2                                                                                                                                                                                                                                                                                                                        |

| Order number    | Product description                  |
|-----------------|--------------------------------------|
| DVS-110W02-3SFP | Managed 10-Port Fast Ethernet Switch |

Unmanaged Fast Ethernet Switch

DVS-008I00

Datasheet #89064119



The DVS-008I00 is an unmanaged 8-Port Fast Ethernet Switch with enhanced hardware design, packet protection and compatibility with multiple industrial communication standards. The DVS-008I00 features wide operating temperature range from -10°C to 60°C, and it is UL, CE, and FCC certified.

Features

- 12 to 48 VDC terminal block power input
- Compatible with various industrial protocols of EtherNet/IP, Profinet, CC-LINK IE and DNP 3.0

Specifications

| Type                        | DVS-008I00                                                                                                                                                                                                    |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimensions (mm)             | 45 x 108.7 x 145.3 (L x W x H), DIM056                                                                                                                                                                        |
| Weight (g)                  | 300                                                                                                                                                                                                           |
| Standard Compliance         | IEEE 802.3 10Base-T , EEE 802.3u 100Base-T(X) and 100Base-FX , IEEE 802.3x Flow Control                                                                                                                       |
| Interface                   | Fast Ethernet Ports,<br>RJ45 Ports: 8 x 10/100Base-T, auto MDI/MDI-X, auto negotiation                                                                                                                        |
| Performance and Scalability | Switching Capacity: 1.6Gbps<br>Forwarding Rate: 2.4Mpps<br>MAC Address Table: 8K<br>Packet Buffer Memory: 1M bits                                                                                             |
| Power Requirements          | Input Voltage: 1 set, 12 to 48 VDC terminal block input<br>Input Current: Max. 0.18A<br>Overload Current Protection, max. input current 3A<br>Reverse Polarity Protection<br>Buffer Time: min. 10ms at 24 VDC |
| Housing                     | IP40 aluminum metal case                                                                                                                                                                                      |
| Installation                | Industrial DIN-Rail and wall mounting                                                                                                                                                                         |
| Operating conditions        | -10°C to 60°C, (14 °F to 140 °F)<br>Storage Temperature: -40°C to 85°C, (-40 °F to 185 °F)<br>Ambient Relative Humidity: 5% to 95% (non-condensing)                                                           |
| Approvals                   | Safety: UL 508, EN 60950-1, IEC 61131-2<br>EMI: FCC 47 CFR Part 15 Subpart B Class B, IEC 61000-6-4, EN 55022<br>EMS: IEC 61000-6-2                                                                           |
| Order number                | Product description                                                                                                                                                                                           |
| DVS-008I00                  | Unmanaged 8-Port Fast Ethernet Switch                                                                                                                                                                         |




# Device Dimensions, Certificates






# Dimensions of the devices in mm and [inch]

DIM001 L-TEMP2

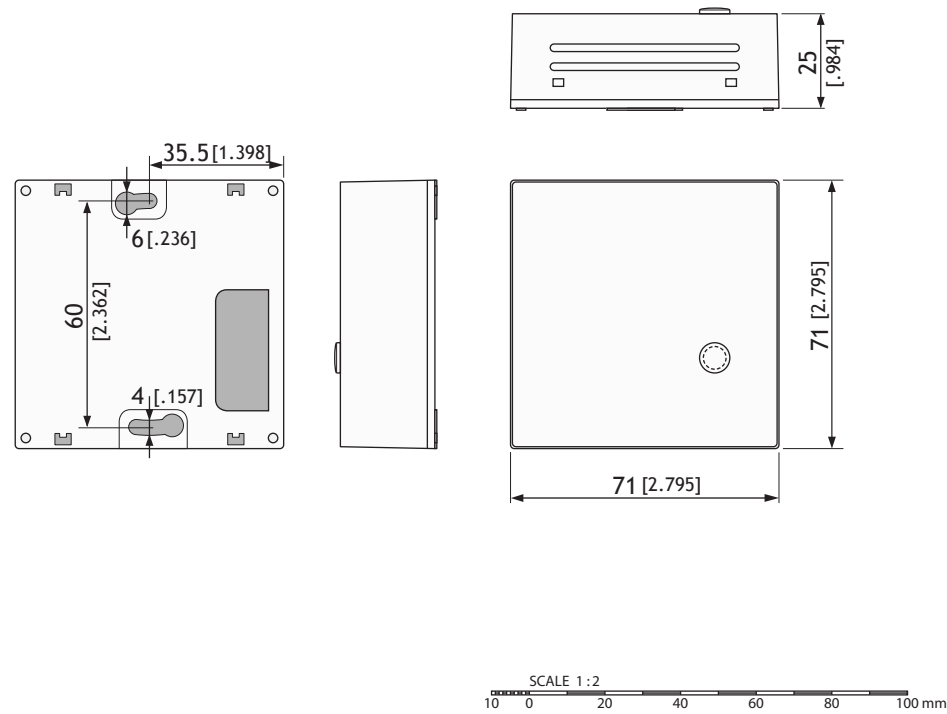

DIM002 LVIS-3ME12-A1

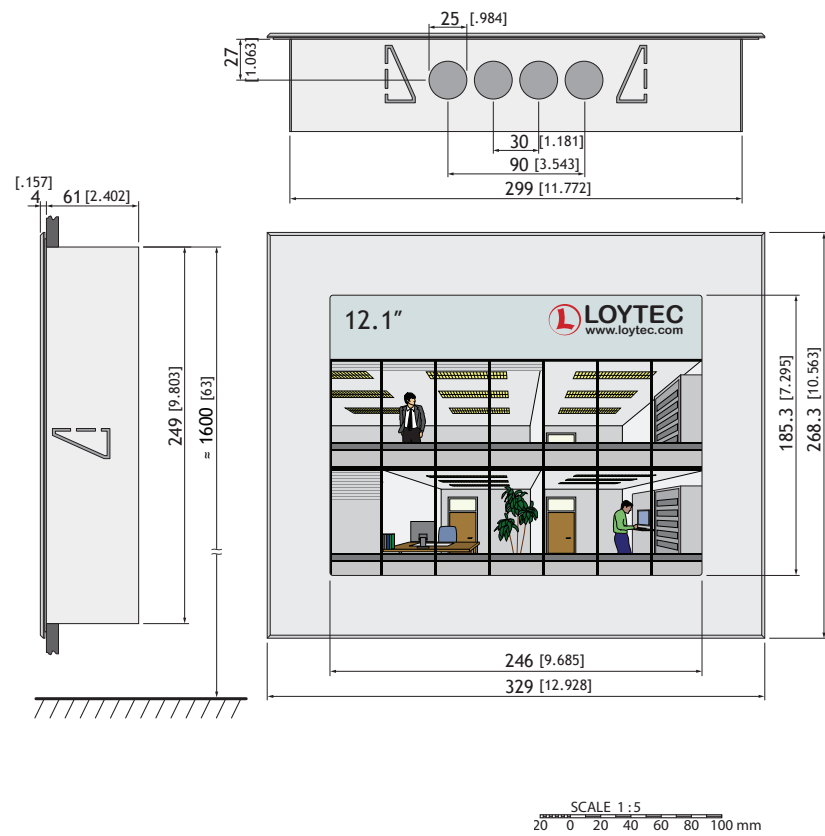








# Dimensions of the devices in mm and [inch]

DIM005      LIOB-586

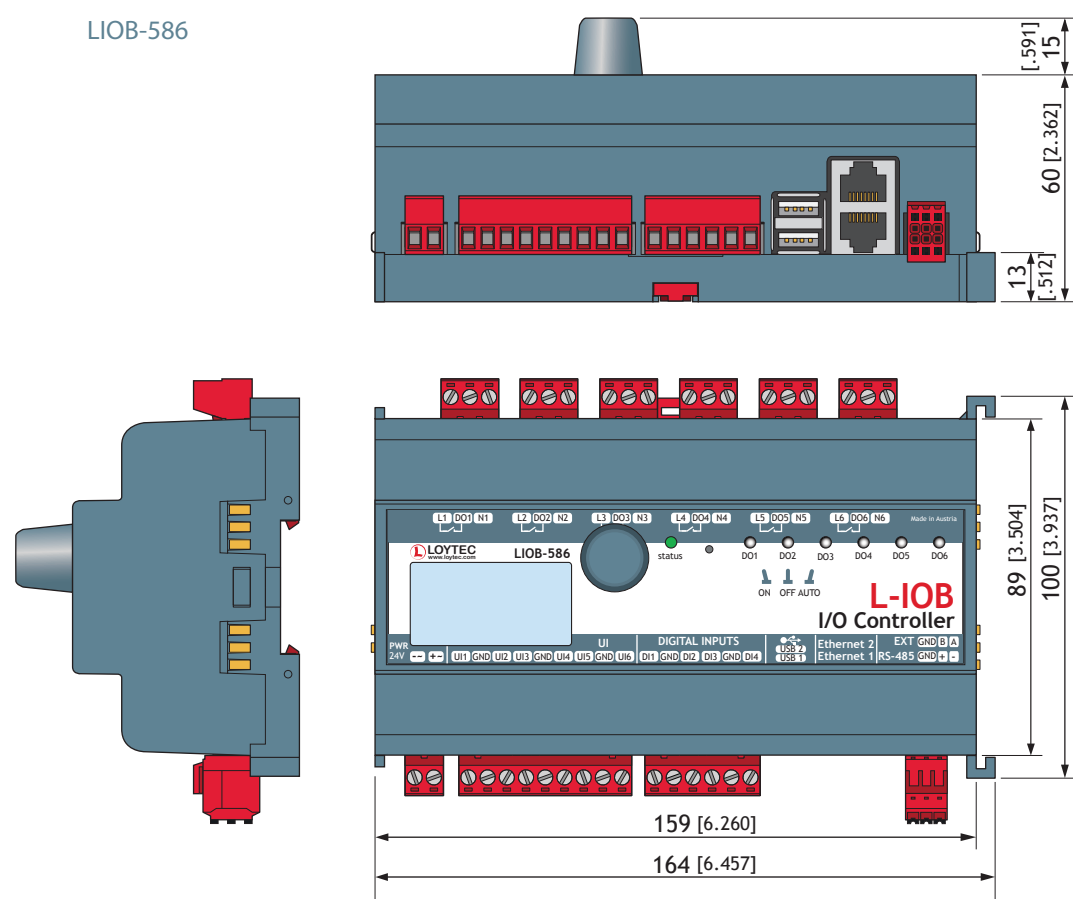


DIM006      LIOB-588

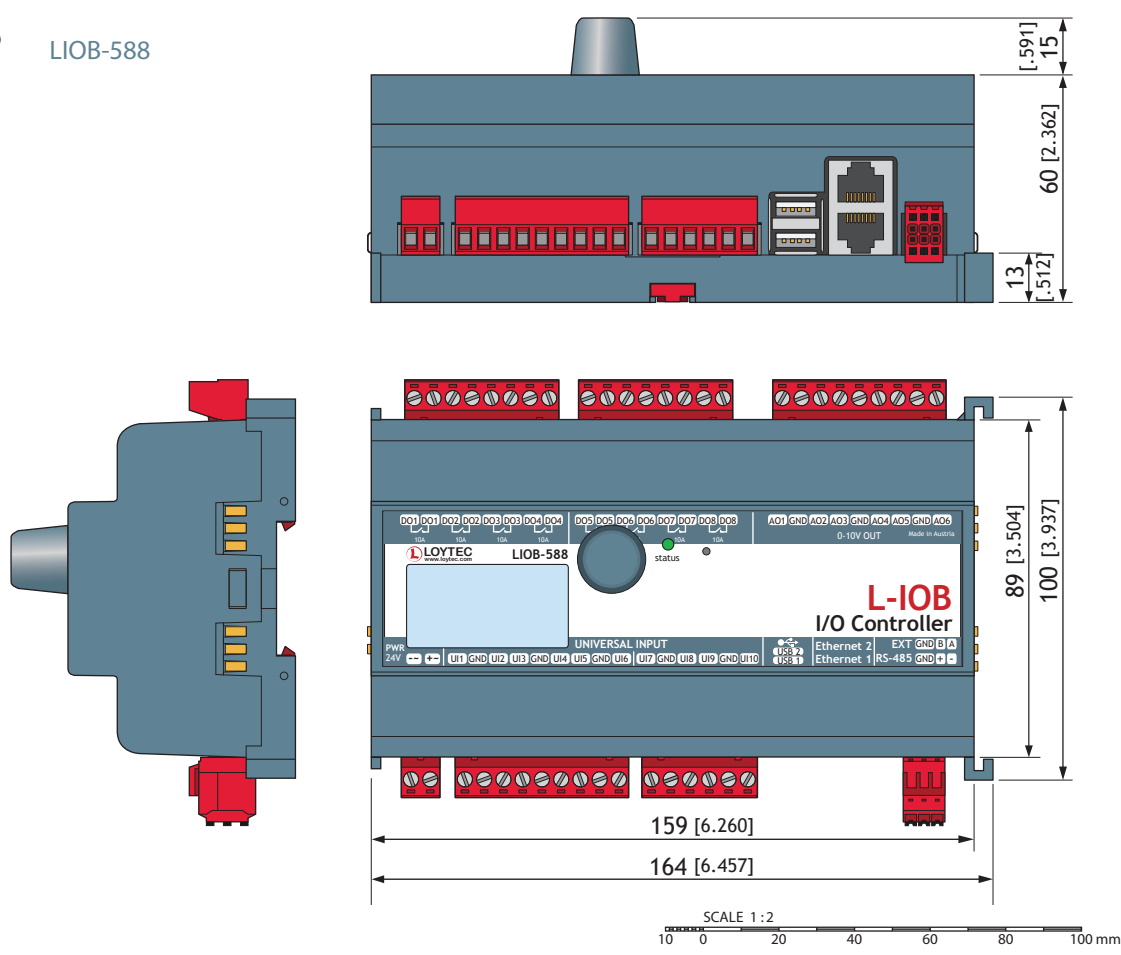

## Dimensions of the devices in mm and [inch]

DIM007

LIOB-589

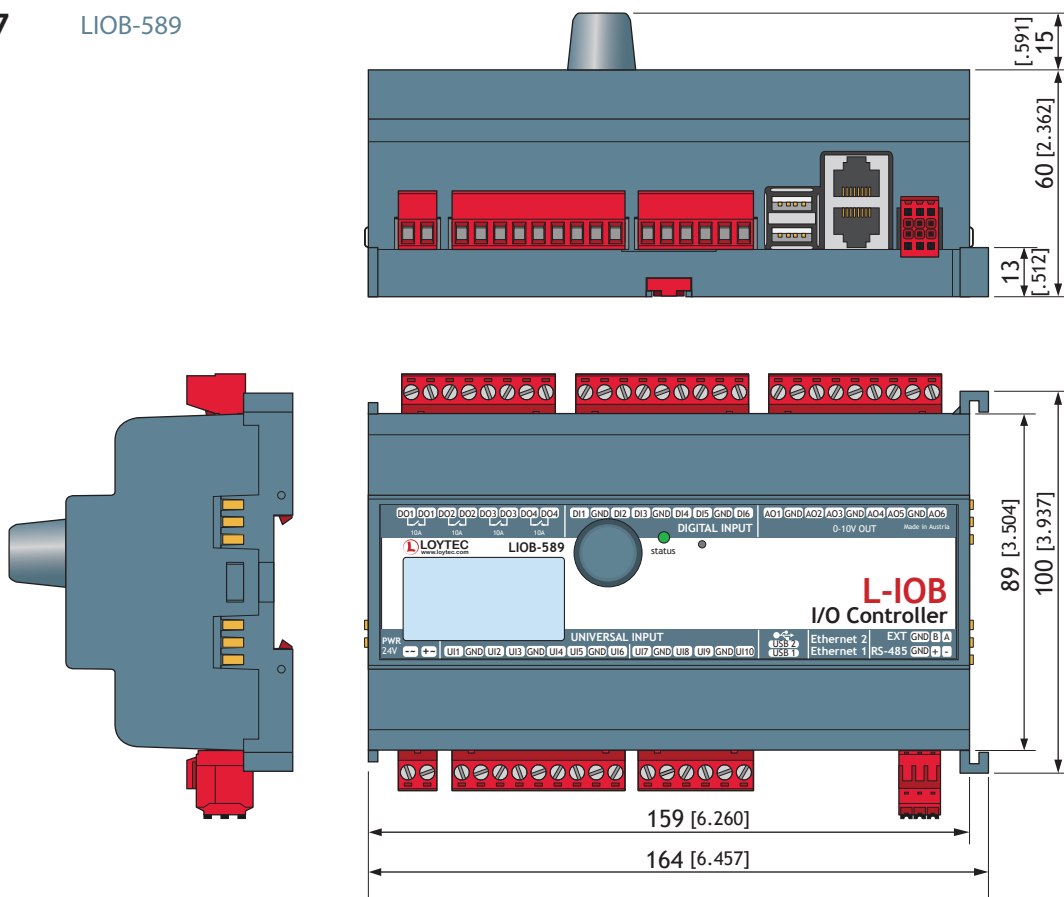


DIM008

LS-11333CB

LS-13300CB

LS-13333CB


LS-33300CB

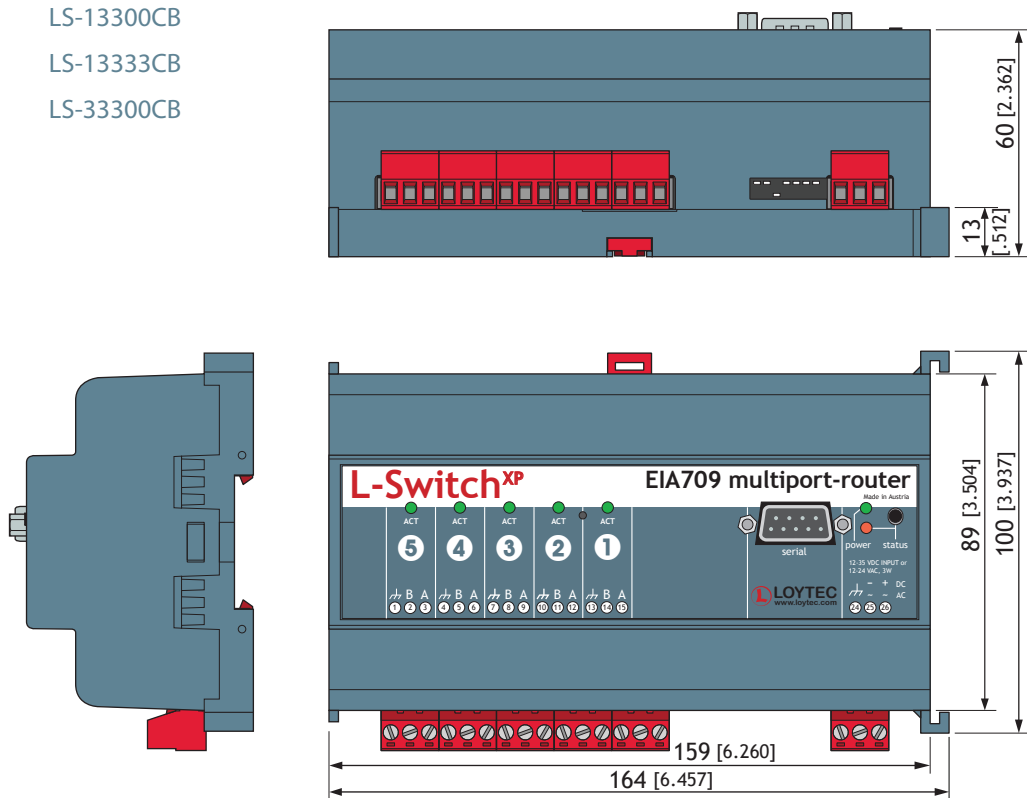


SCALE 1:2  
10 0 20 40 60 80 100 mm

Dimensions of the devices in mm and [inch]

DIM009    LIP-33ECRB

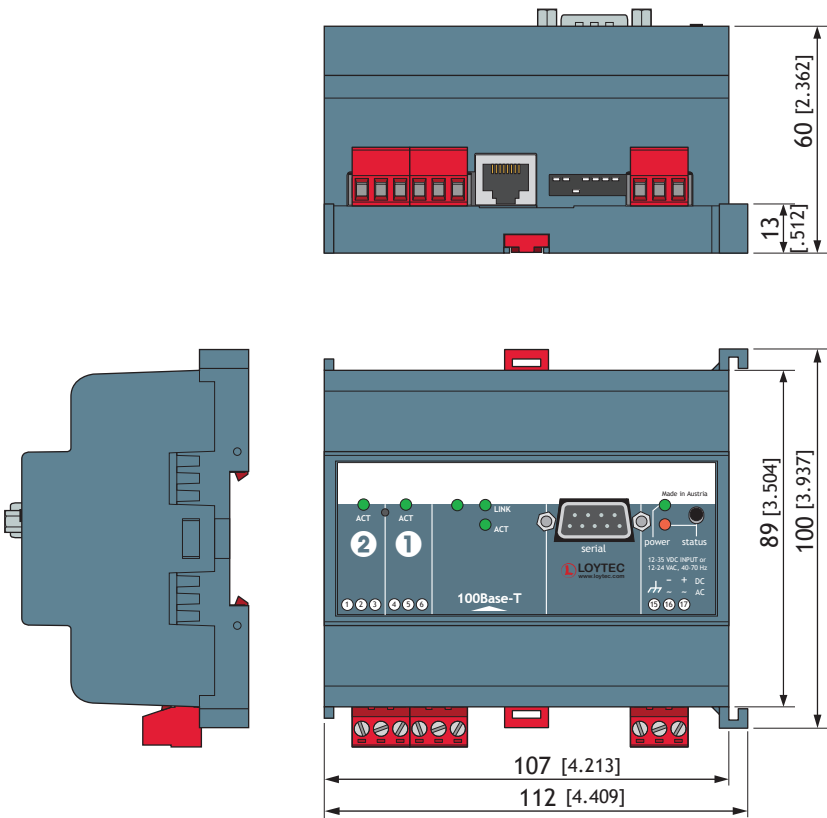


DIM010    LS-11CB  
               LS-13CB  
               LS-33CB

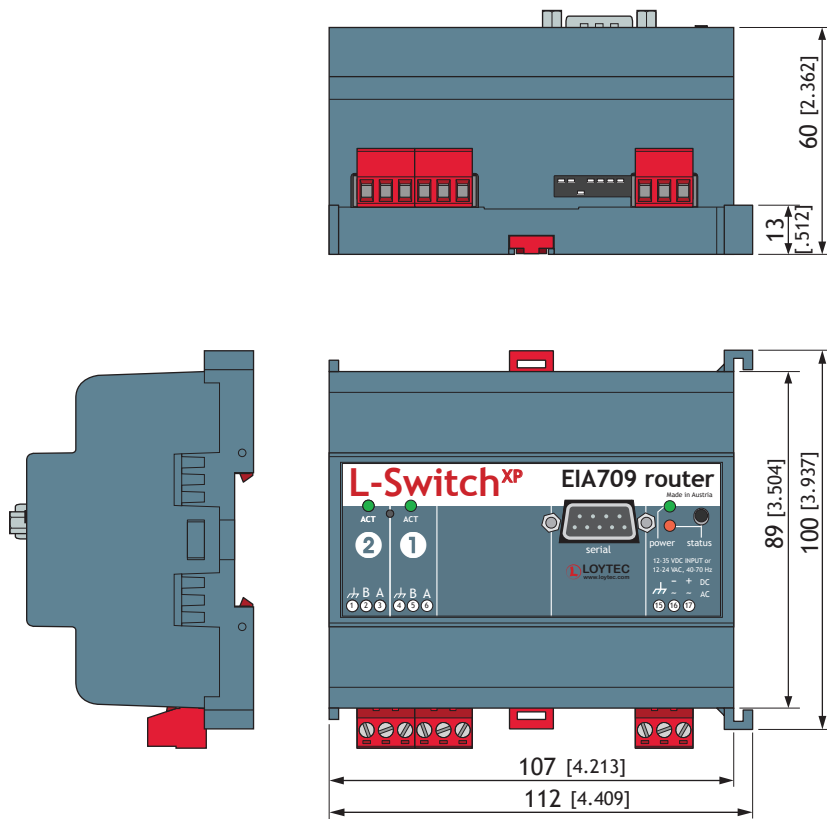




## Dimensions of the devices in mm and [inch]

**DIM011** LIOB-100

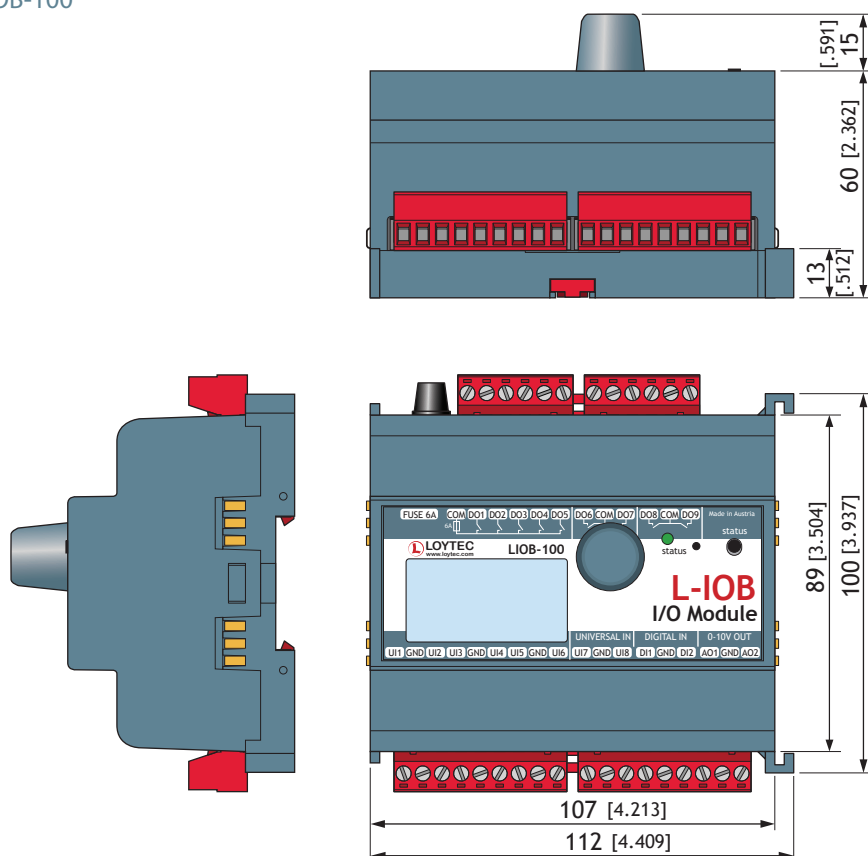


**DIM012** LIOB-101

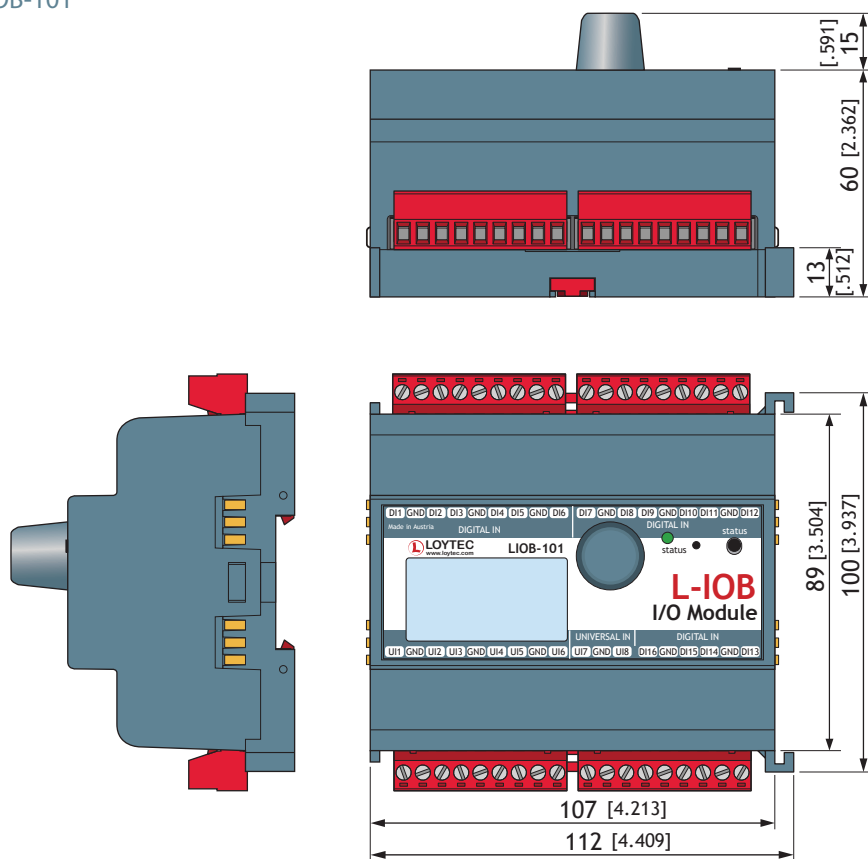


SCALE 1:2  
10 0 20 40 60 80 100 mm

Dimensions of the devices in mm and [inch]

DIM013    LIOB-102

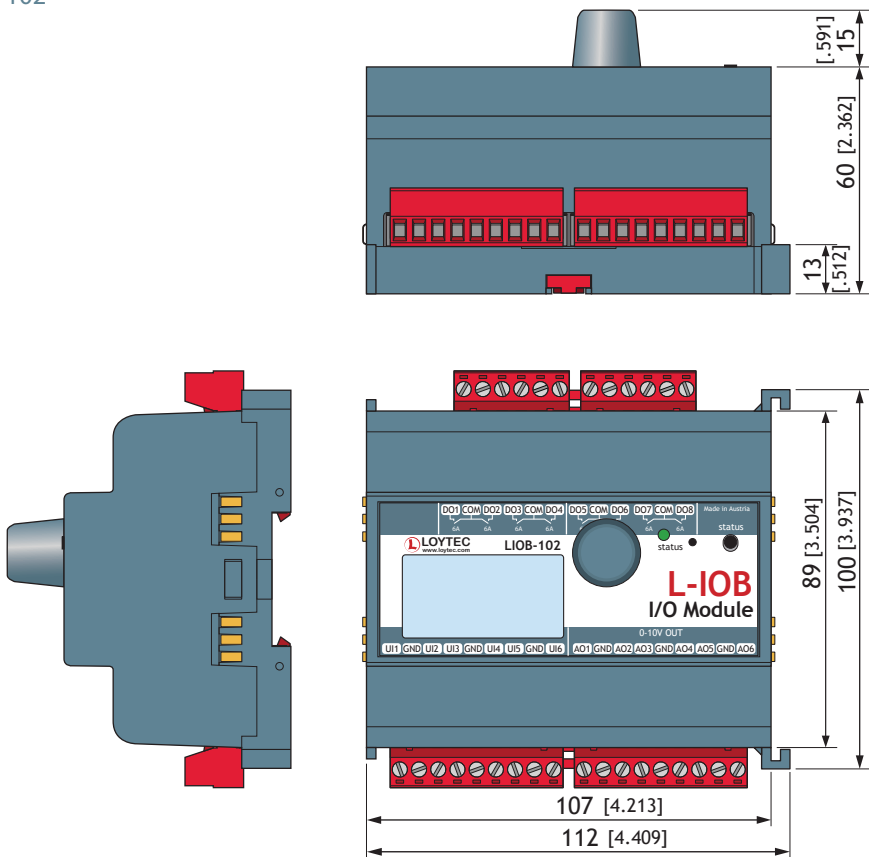


DIM014    LIOB-103

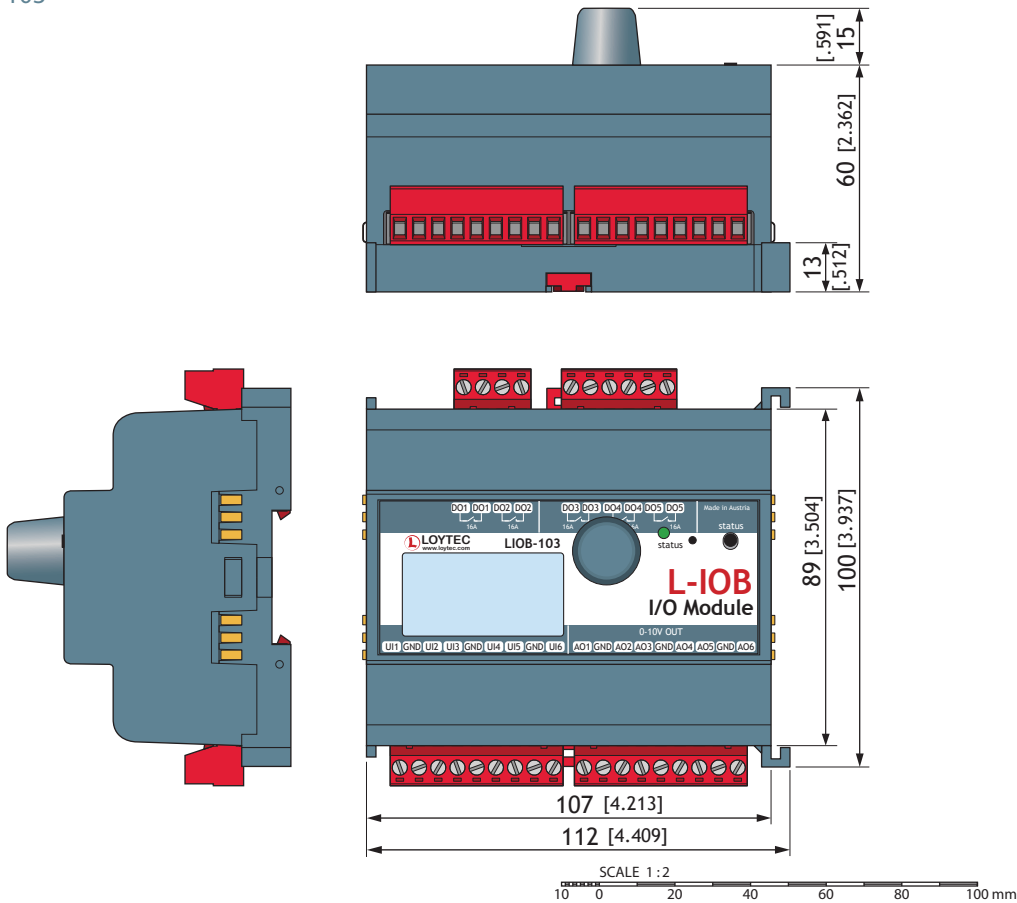

## Dimensions of the devices in mm and [inch]


### DIM015

LIOB-150  
LIOB-151  
LIOB-152  
LIOB-180  
LIOB-181  
LIOB-182

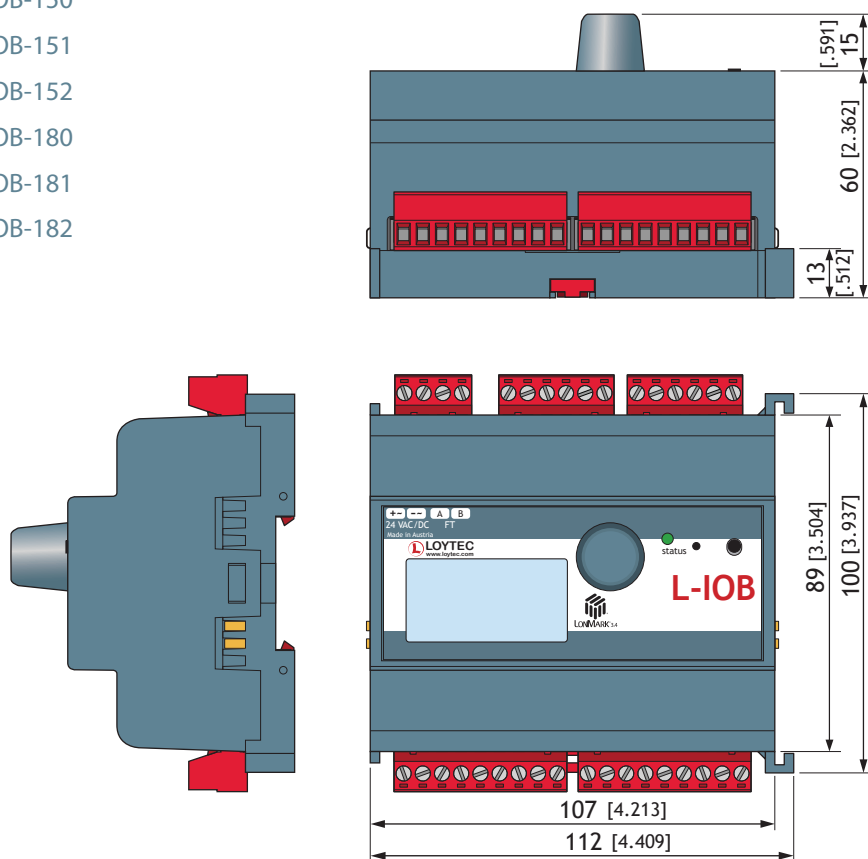

### DIM016


LIOB-153  
LIOB-183

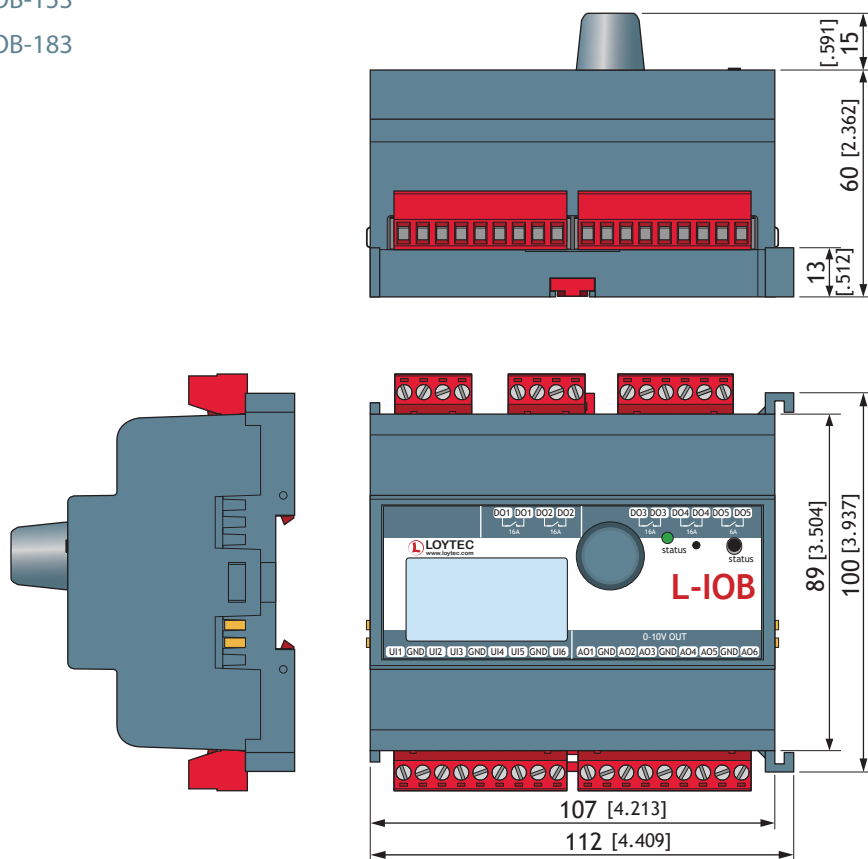


SCALE 1:2  
10 0 20 40 60 80 100 mm

# Dimensions of the devices in mm and [inch]

**DIM017**    LIOB-154  
                  LIOB-184

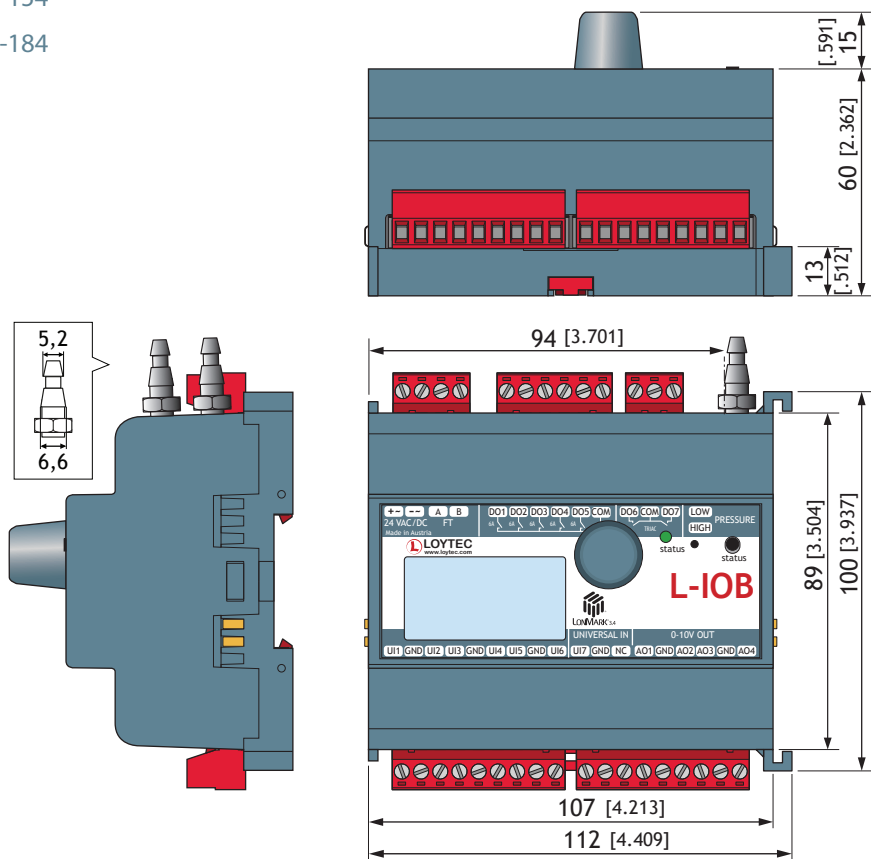

**DIM018**    LIOB-450  
                  LIOB-480  
                  LIOB-550  
                  LIOB-580

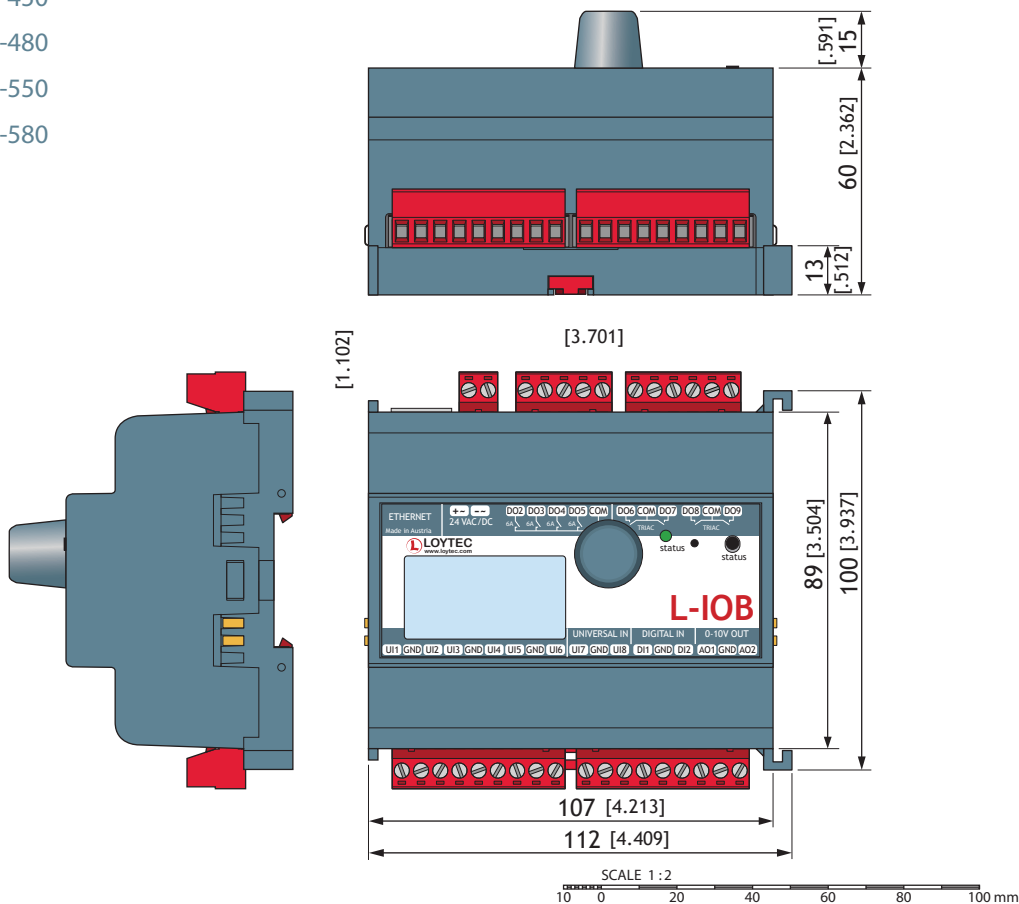




## Dimensions of the devices in mm and [inch]


### DIM019

LI0B-451  
LI0B-481  
LI0B-551  
LI0B-581

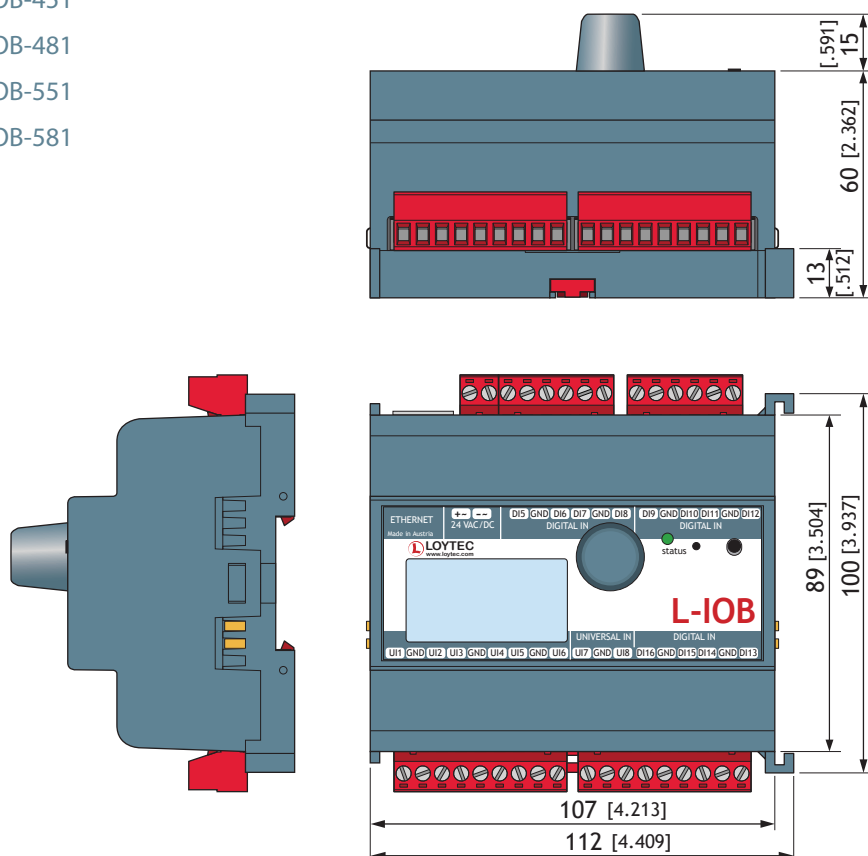

### DIM020

LI0B-452  
LI0B-482  
LI0B-552  
LI0B-582

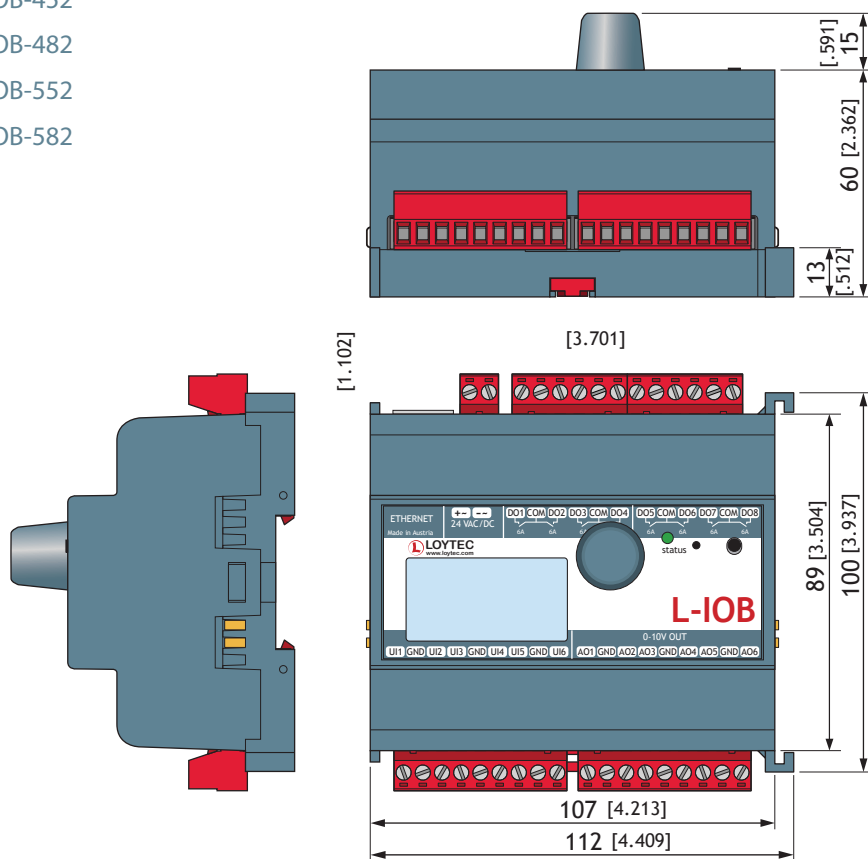

SCALE 1:2  
10 0 20 40 60 80 100 mm


# Dimensions of the devices in mm and [inch]

- DIM021
- LIOB-453

LIOB-483

LIOB-553

LIOB-583

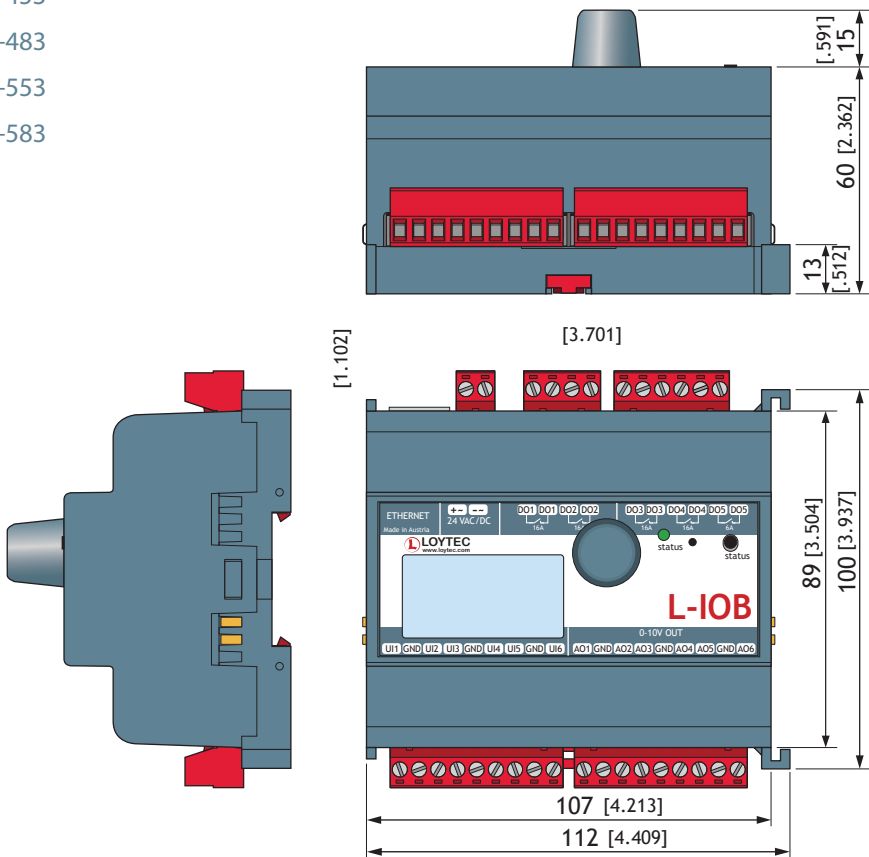


- DIM022
- LIOB-454

LIOB-484


LIOB-554

LIOB-584

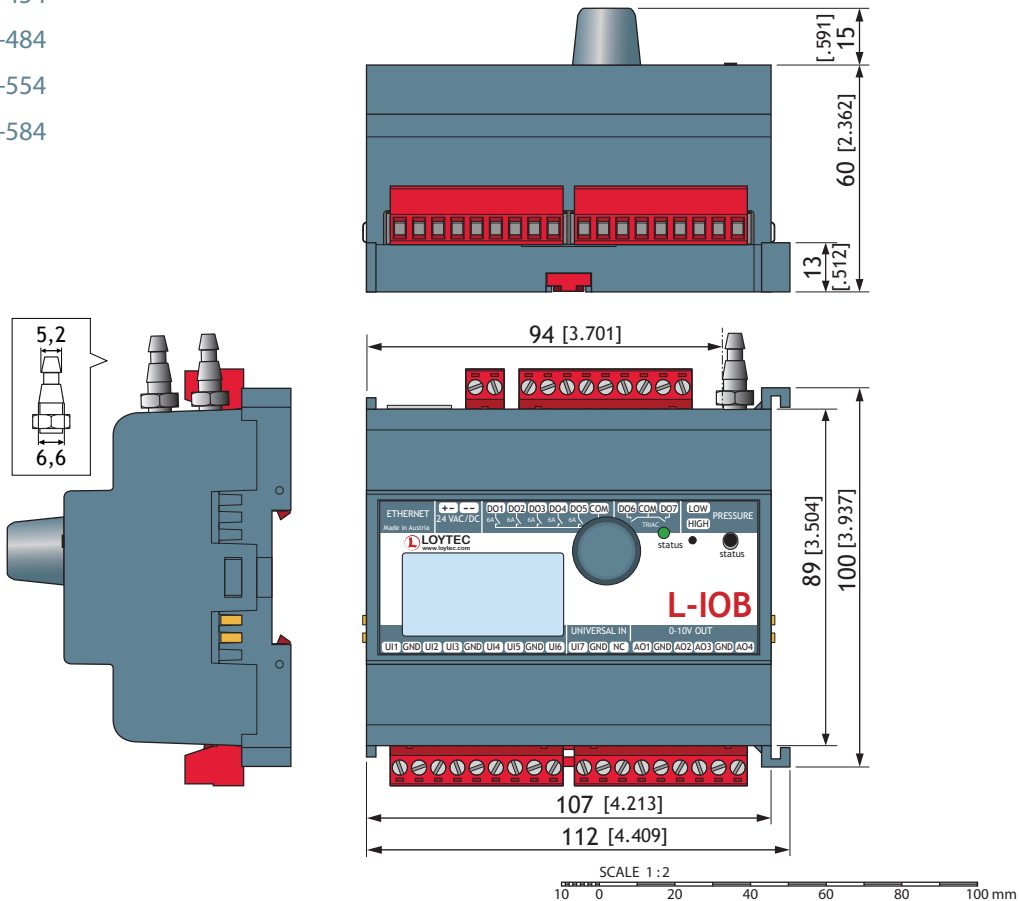


## Dimensions of the devices in mm and [inch]

**DIM023** LDALI-PWR2-U  
LDALI-PWR4-U

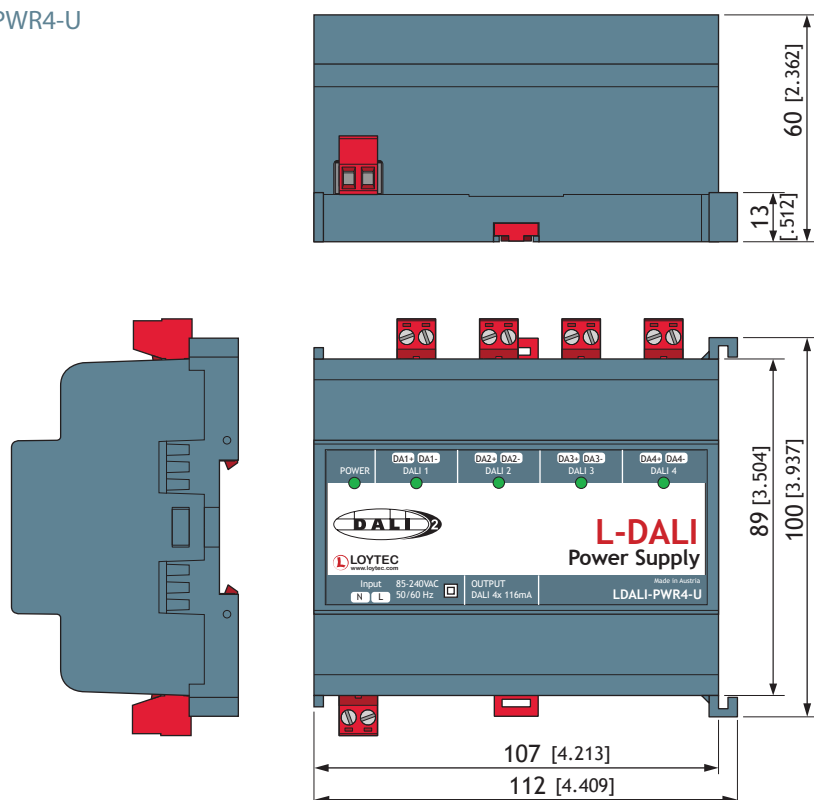


**DIM024** L-MBUS20  
L-MBUS80

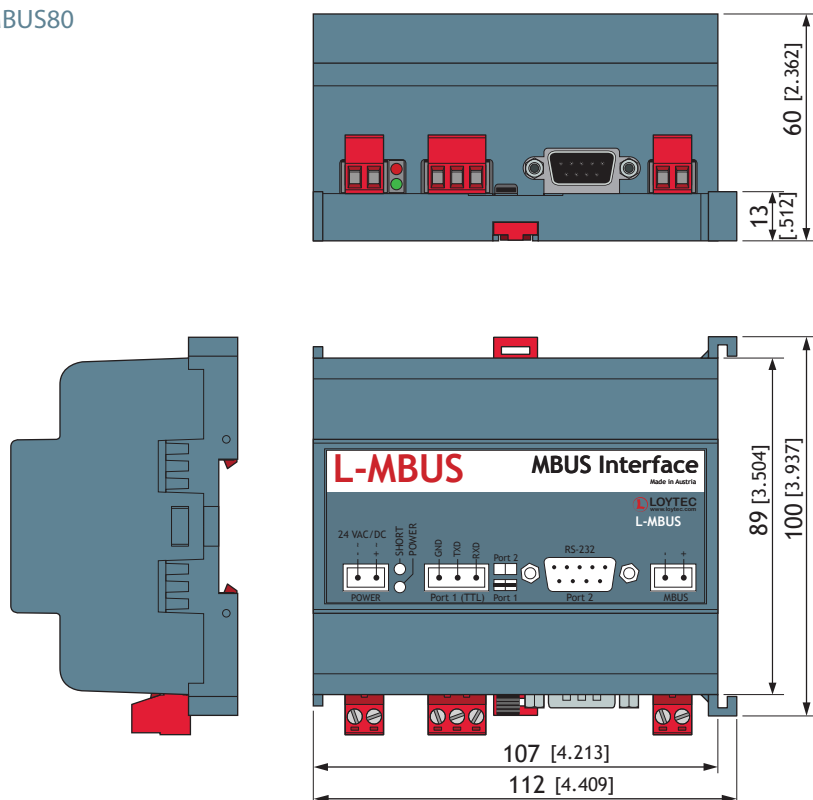


SCALE 1:2  
10 0 20 40 60 80 100 mm

# Dimensions of the devices in mm and [inch]


DIM025 LPOW-2415A

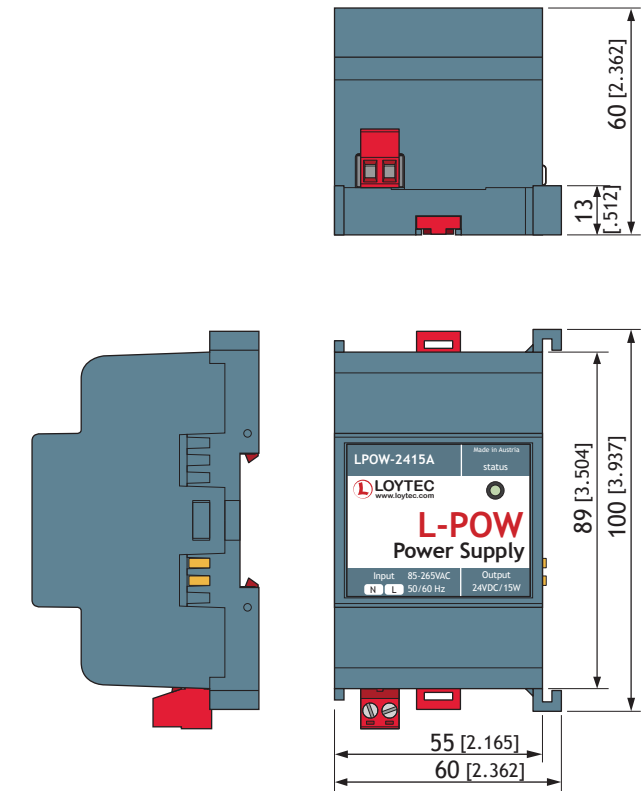

DIM026 LPOW-2415B

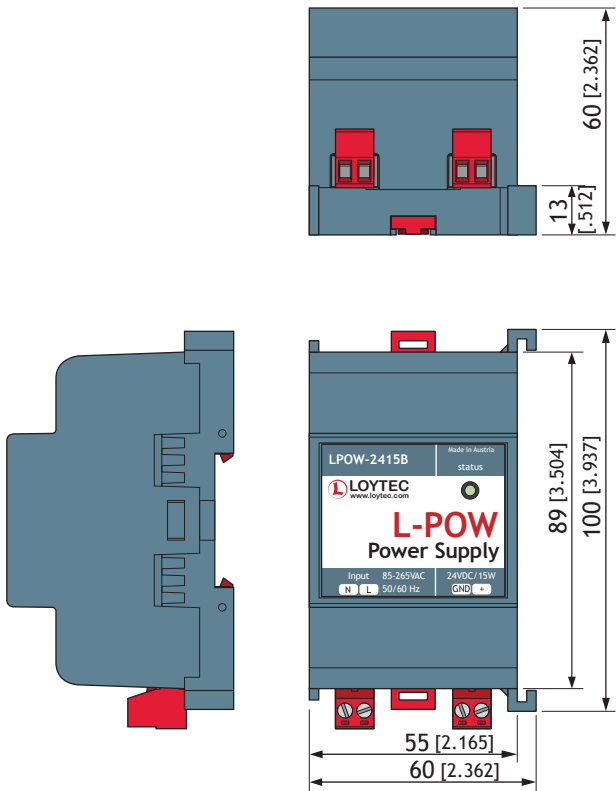


DIM027  
 LT-03  
 LT-04  
 LT-13  
 LT-33  
 LT-B4

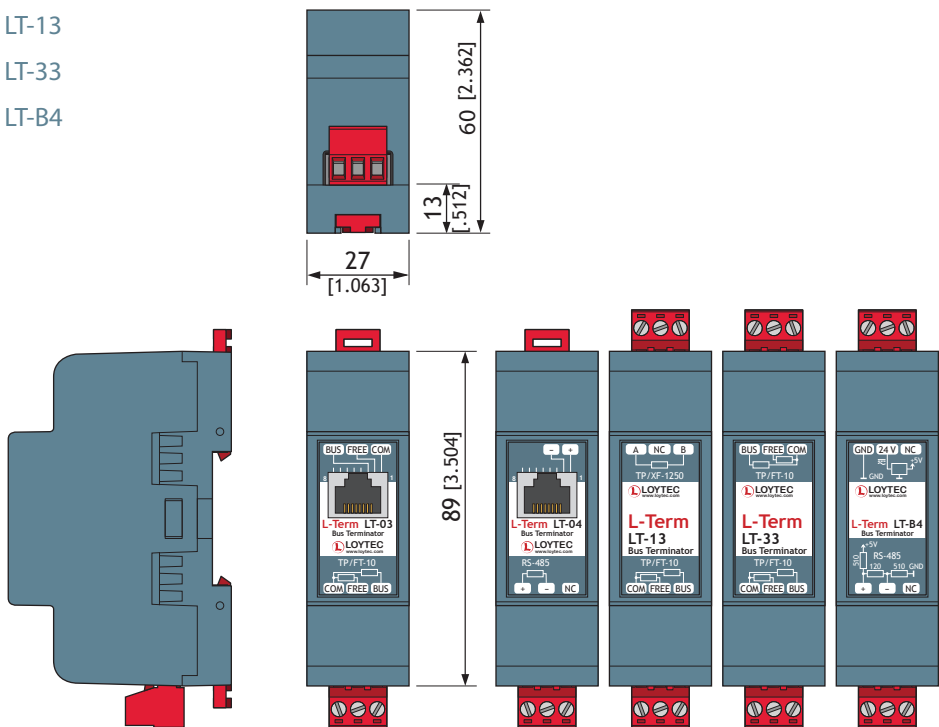




## Dimensions of the devices in mm and [inch]


**DIM028** LKNX-300

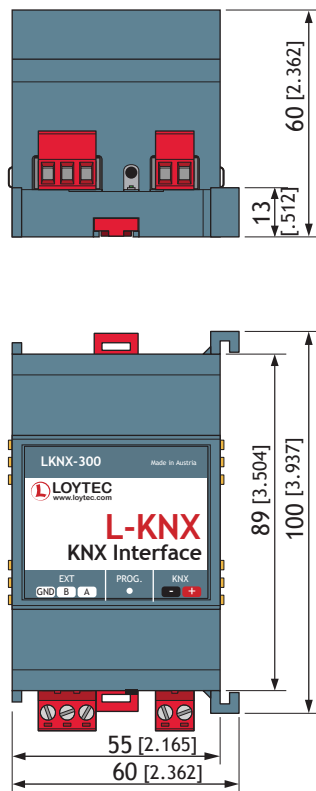


**DIM029** LIOB-A2

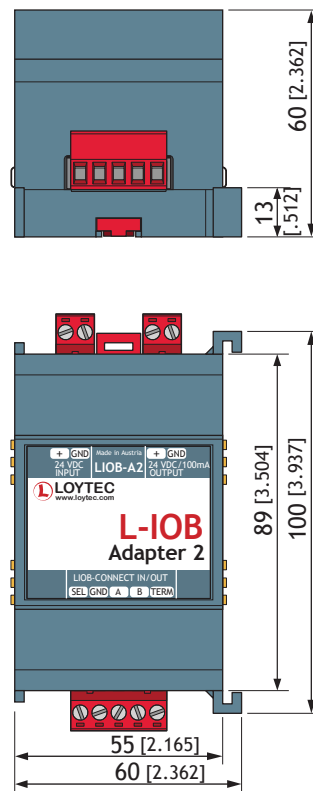

**DIM030** LIOB-A4

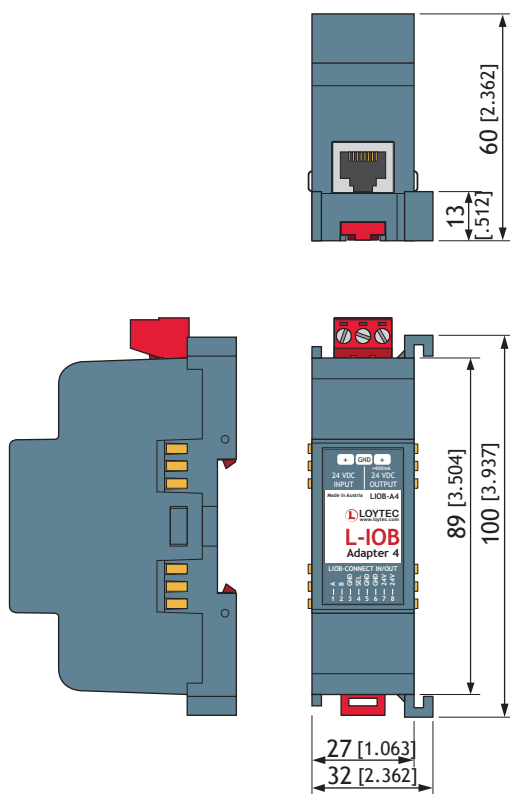


**DIM031** LIOB-A5

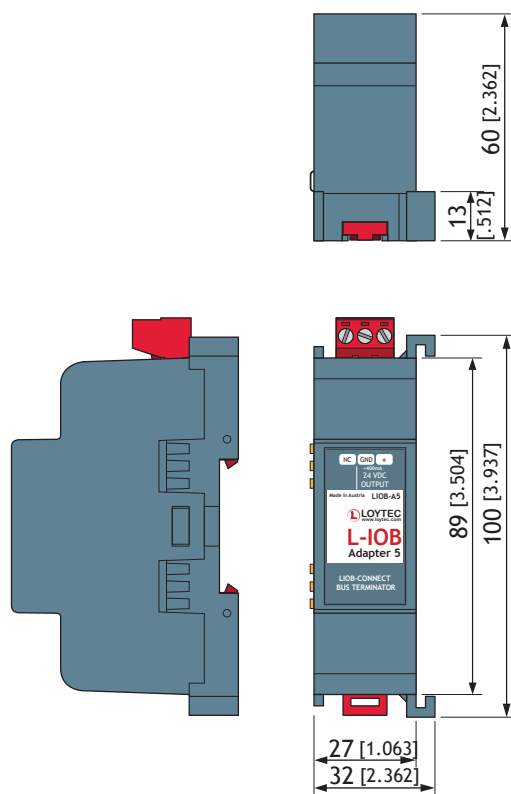


SCALE 1:2  
10 0 20 40 60 80 100 mm

Dimensions of the devices in mm and [inch]


DIM032 LSTAT-800-Gx-Lx  
LSTAT-801-Gx-Lx  
LSTAT-802-Gx-Lx

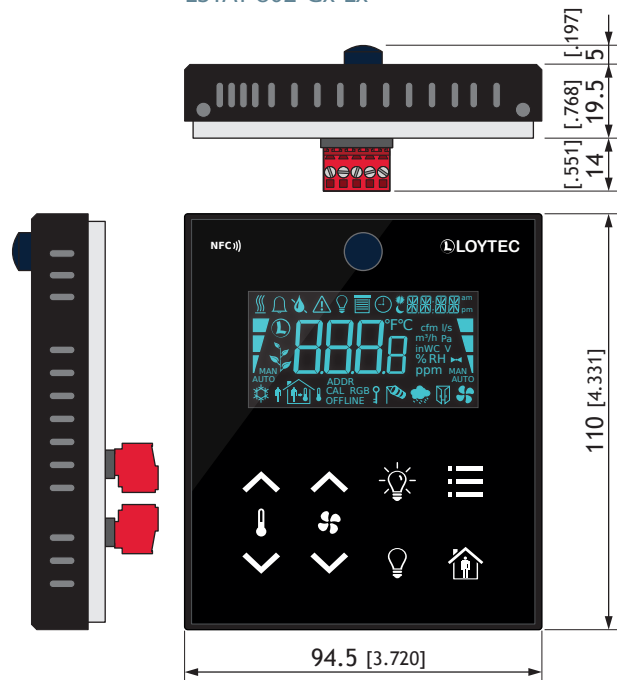

DIM033 LSMI-800

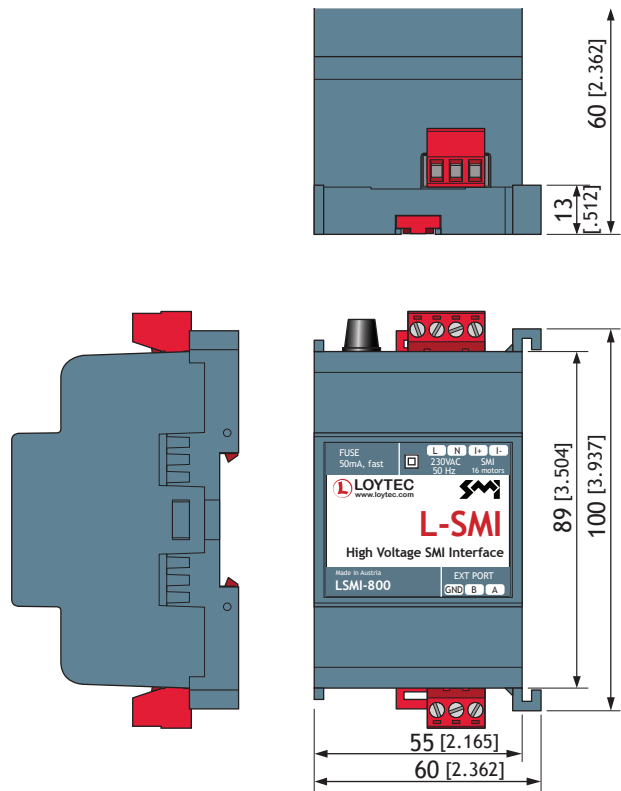


DIM034 LSMI-804

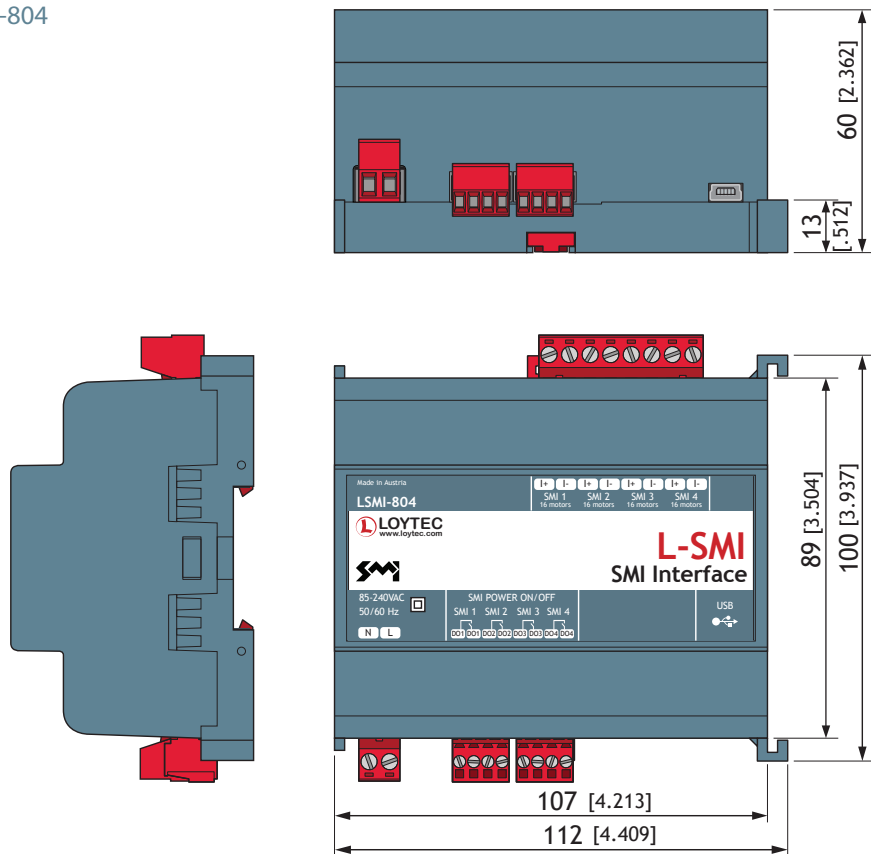

## Dimensions of the devices in mm and [inch]


### DIM035

LDALI-3E101-U  
LDALI-3E102-U  
LDALI-3E104-U  
LDALI-ME201-U  
LDALI-ME204-U  
LDALI-PLC4

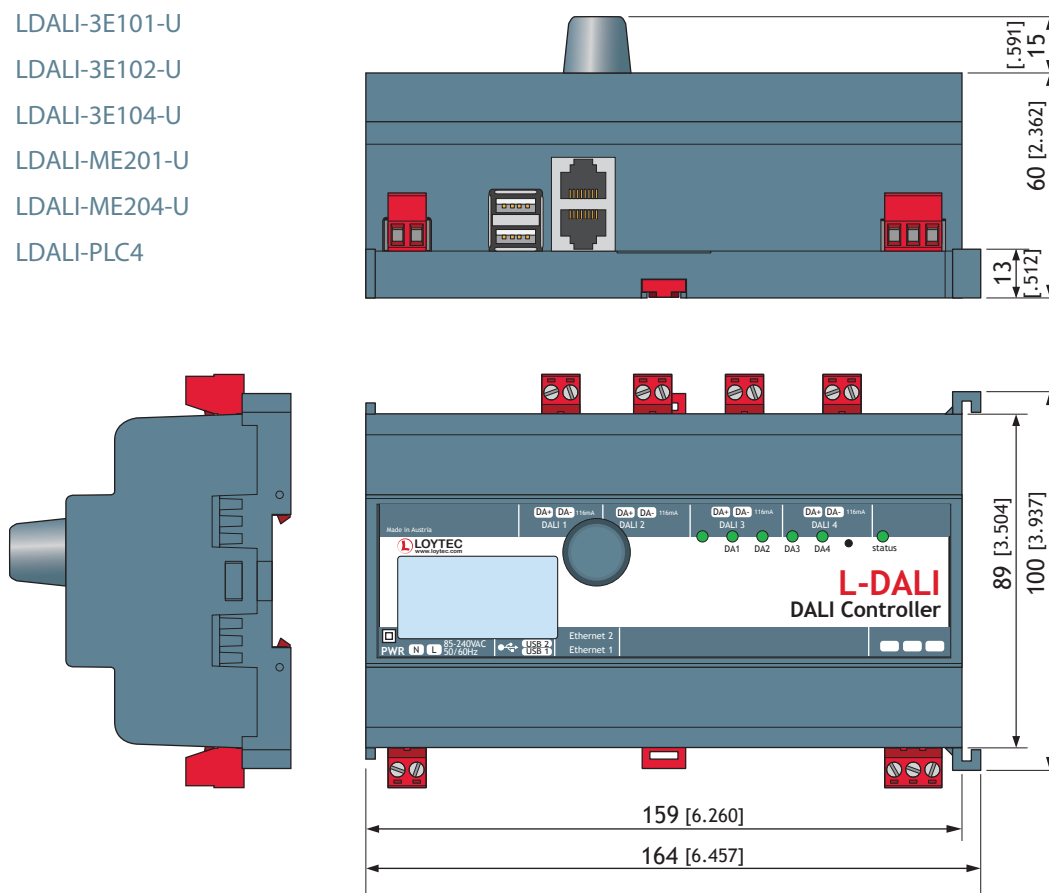

### DIM036


WLAN Antenna 2.4 GHz  
EnOcean Antenna 868/905 MHz

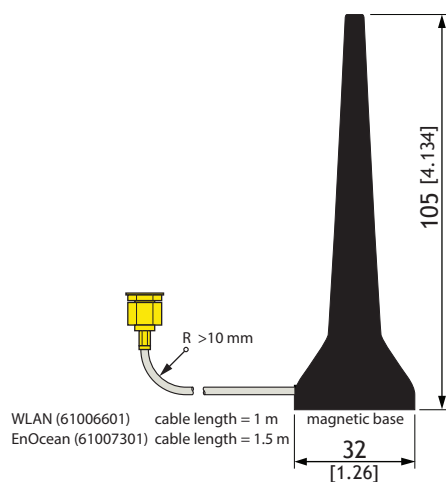


SCALE 1:2  
10 0 20 40 60 80 100 mm

# Dimensions of the devices in mm and [inch]

DIM037    LENO-800  
               LENO-801  
               LENO-802

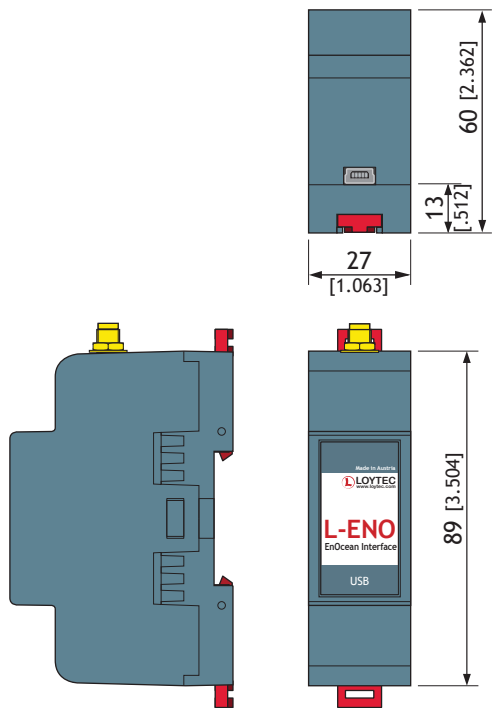


DIM038    LWLAN-800

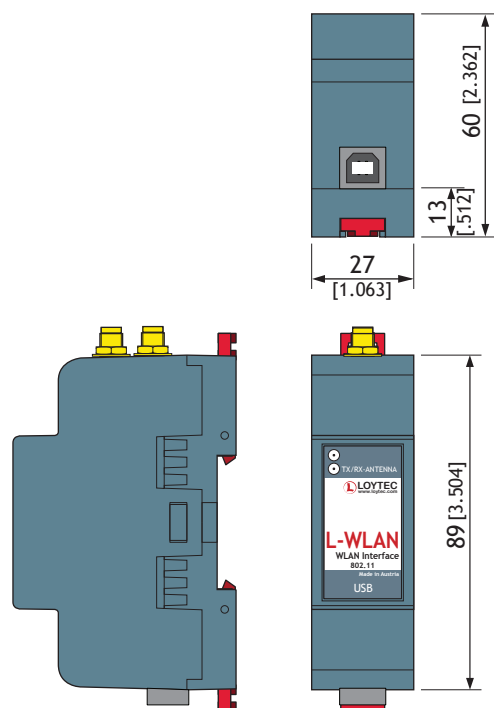

SCALE 1:2  
 10 0 20 40 60 80 100 mm

DIM039    L-RC1

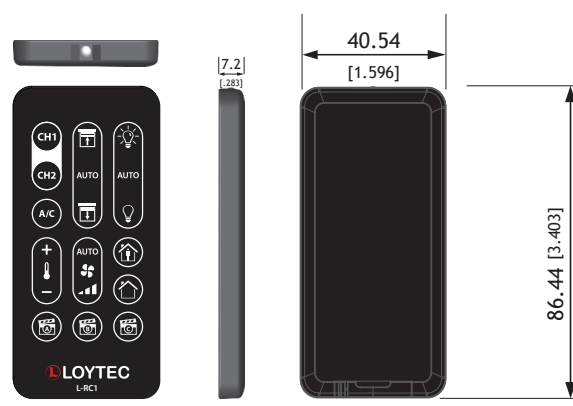


SCALE 1:2  
 10 0 20 40 60 80 100 mm




## Dimensions of the devices in mm and [inch]


### DIM040 LDALI-MS2

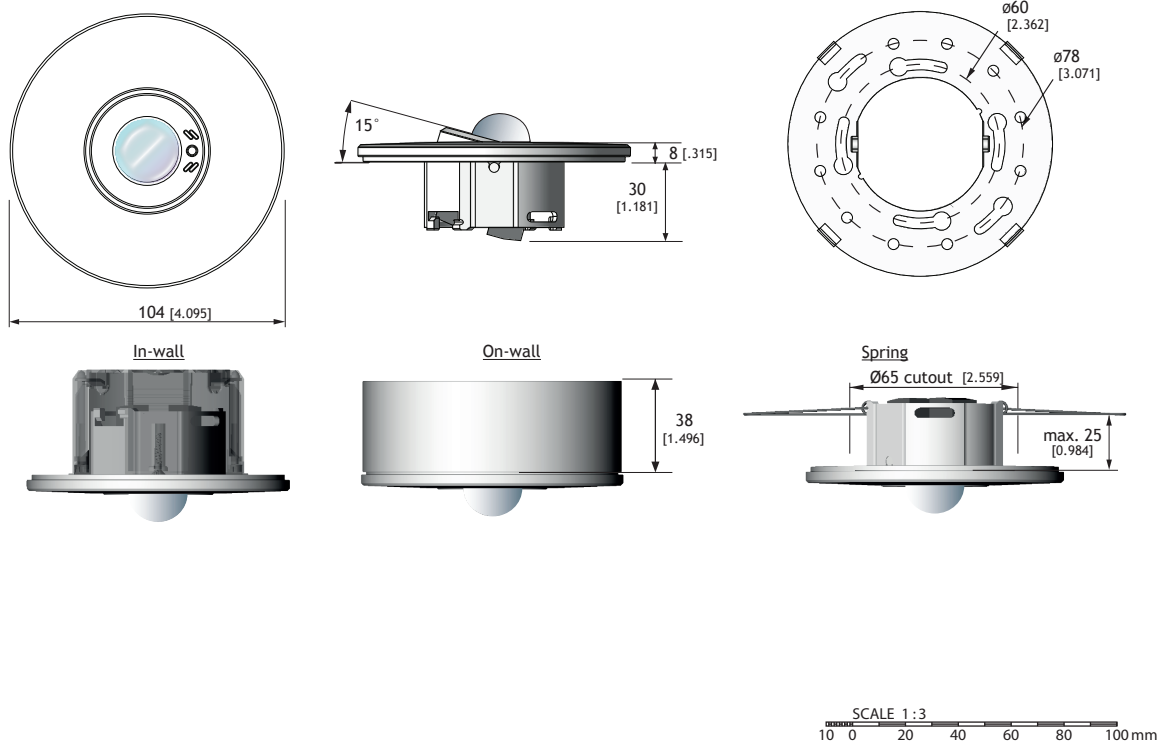

### DIM041 LDALI-BM2

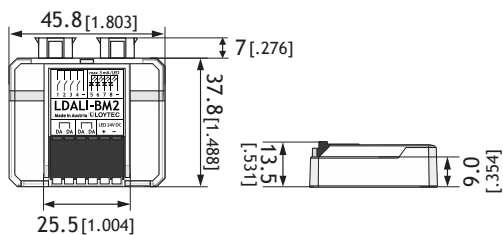


### DIM042 LDALI-RM3 LDALI-RM4

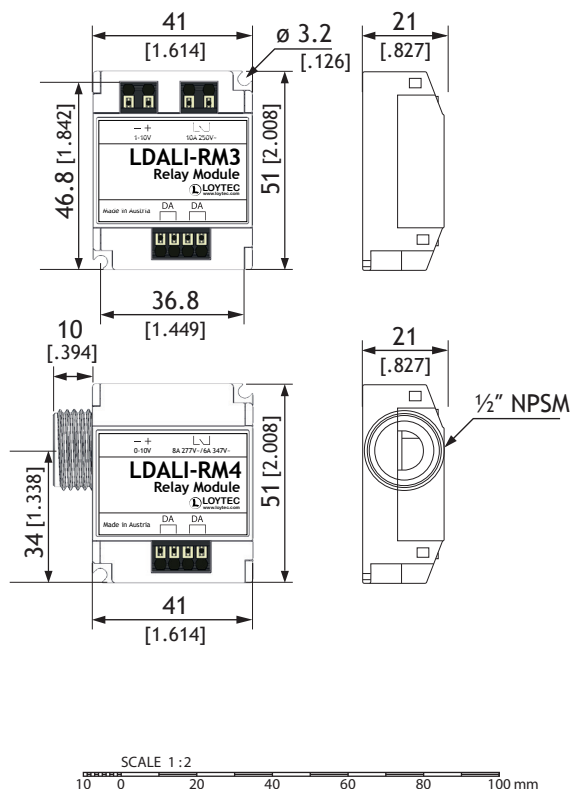


# Dimensions of the devices in mm and [inch]

DIM043  
 LIOB-AIR1  
 LIOB-AIR2

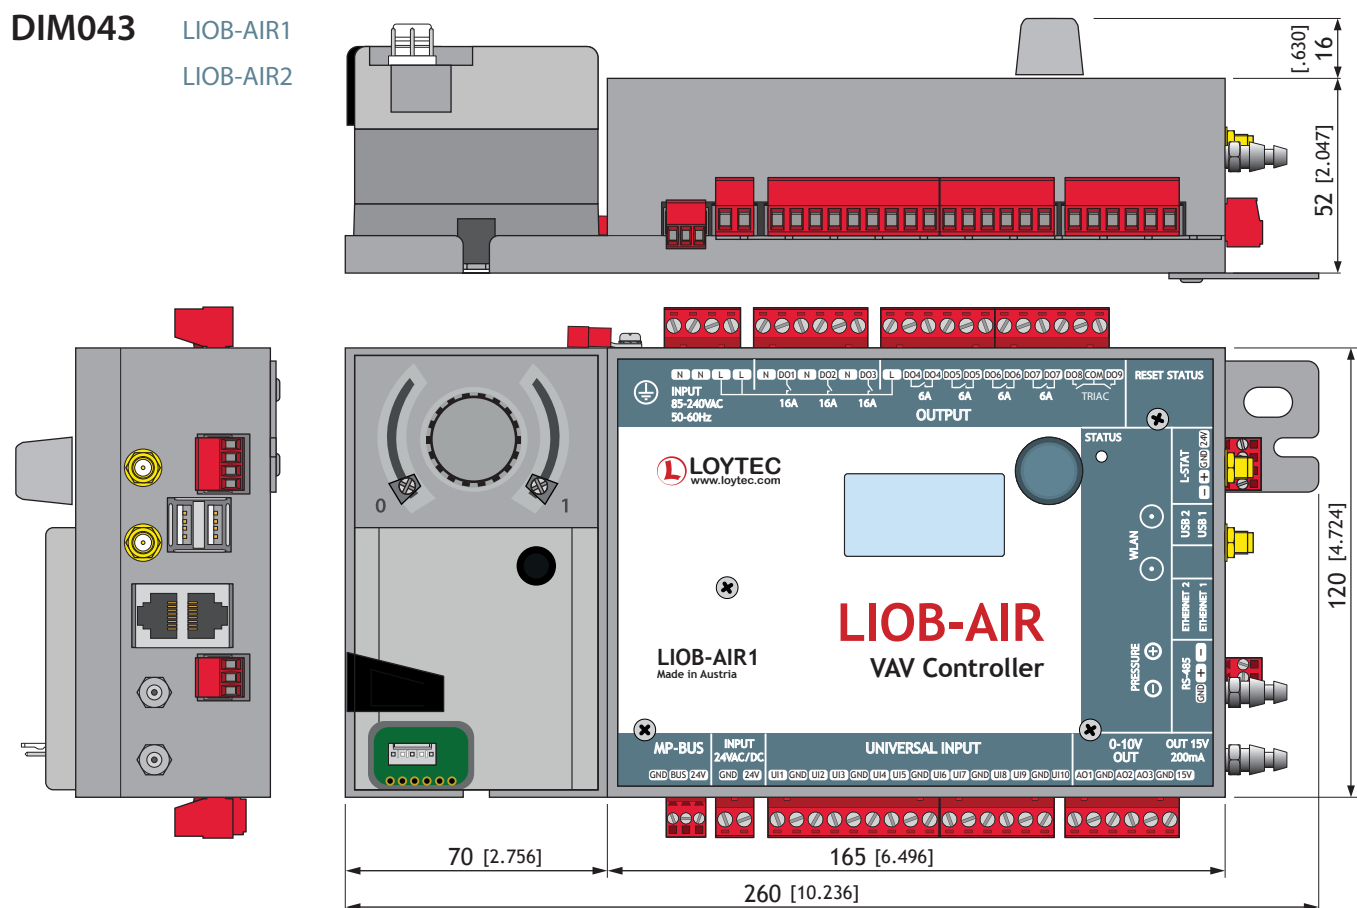


DIM044  
 LIOB-AIR13

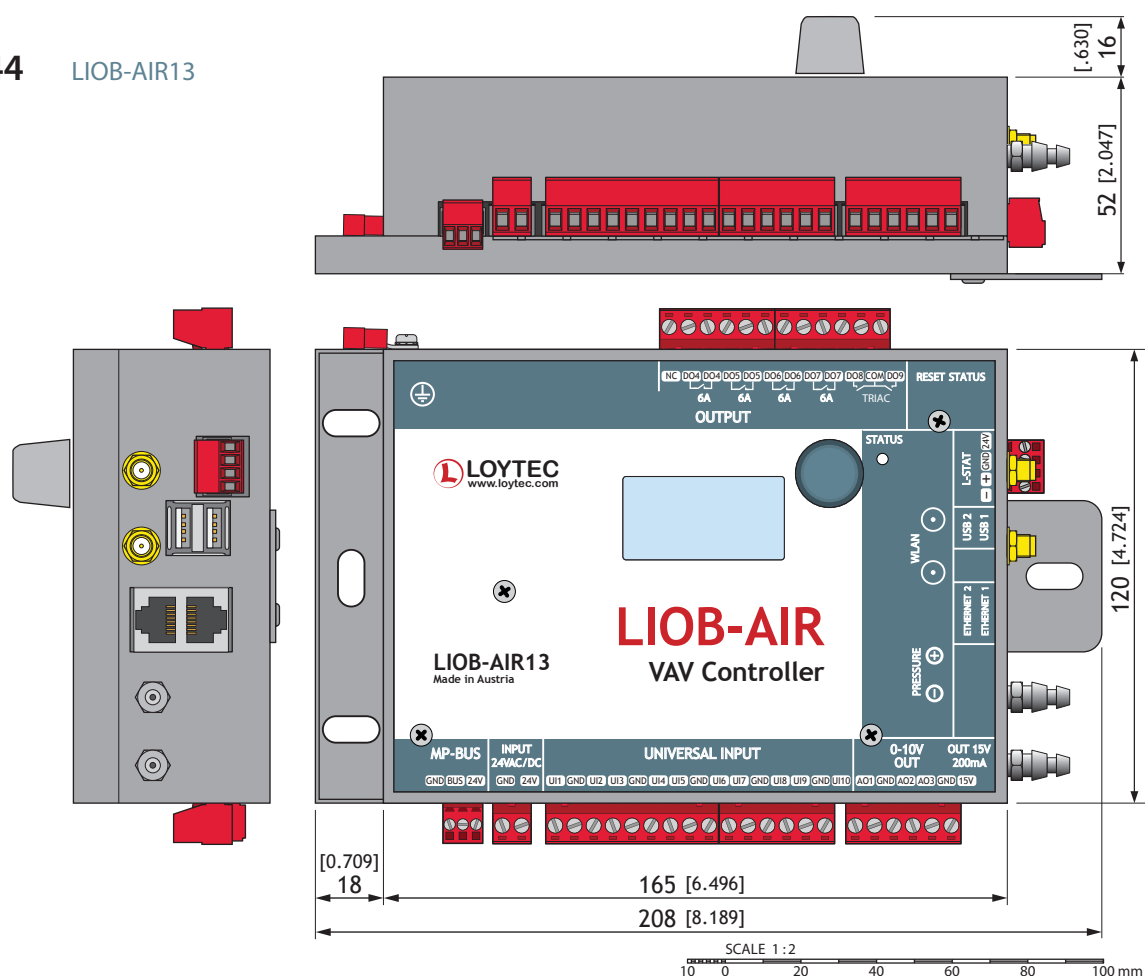

## Dimensions of the devices in mm and [inch]


### DIM045

LINX-215  
LINX-102  
LINX-103  
LINX-202  
LINX-203  
LGATE-902

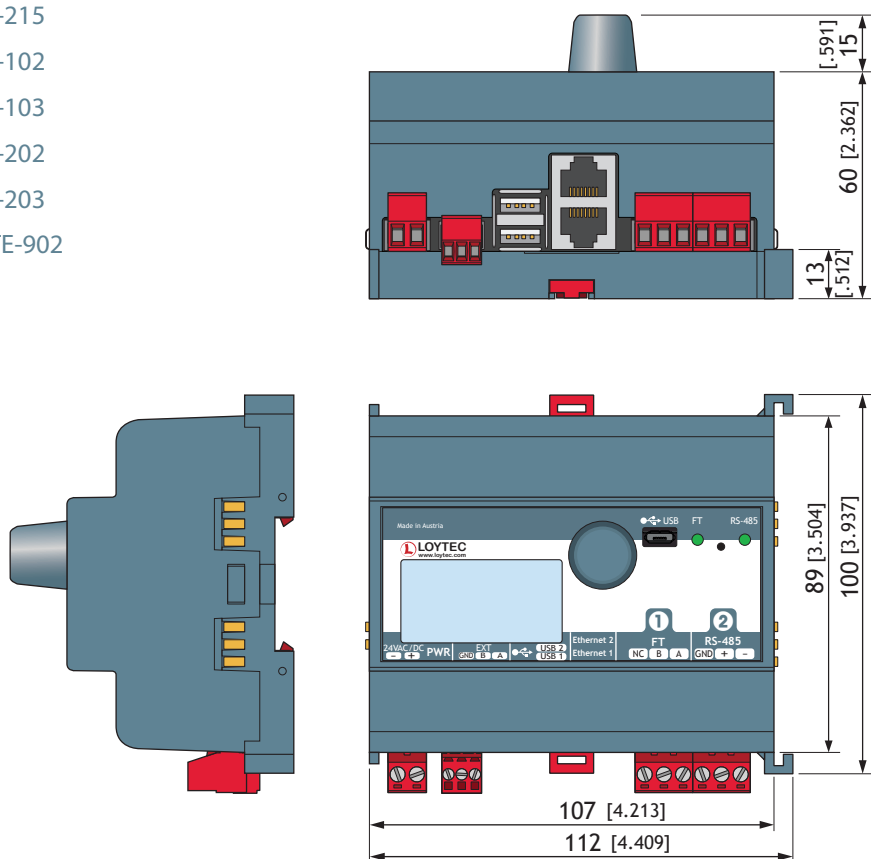

### DIM046


LIP-1ECTC  
LIP-3ECTC  
LIP-33ECTC  
LIP-ME201C  
LIP-ME202C  
NIC709-1E100C  
NIC709-3E100C

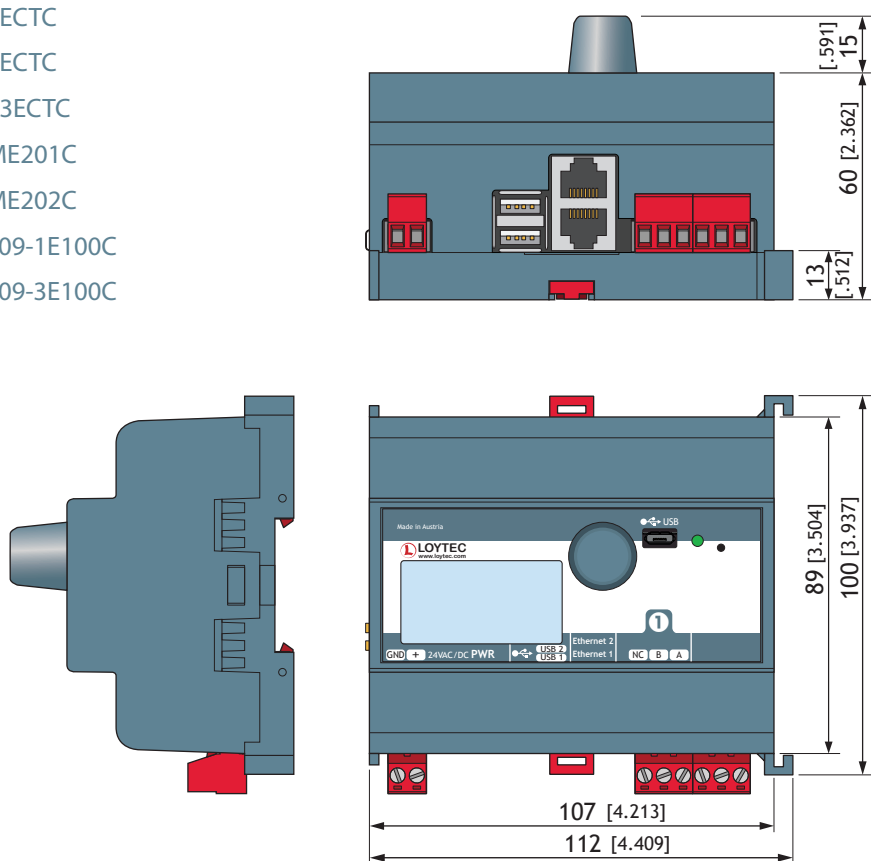

SCALE 1:2  
10 0 20 40 60 80 100 mm

## Dimensions of the devices in mm and [inch]

**DIM047**      LROC-400  
LROC-401  
LROC-402

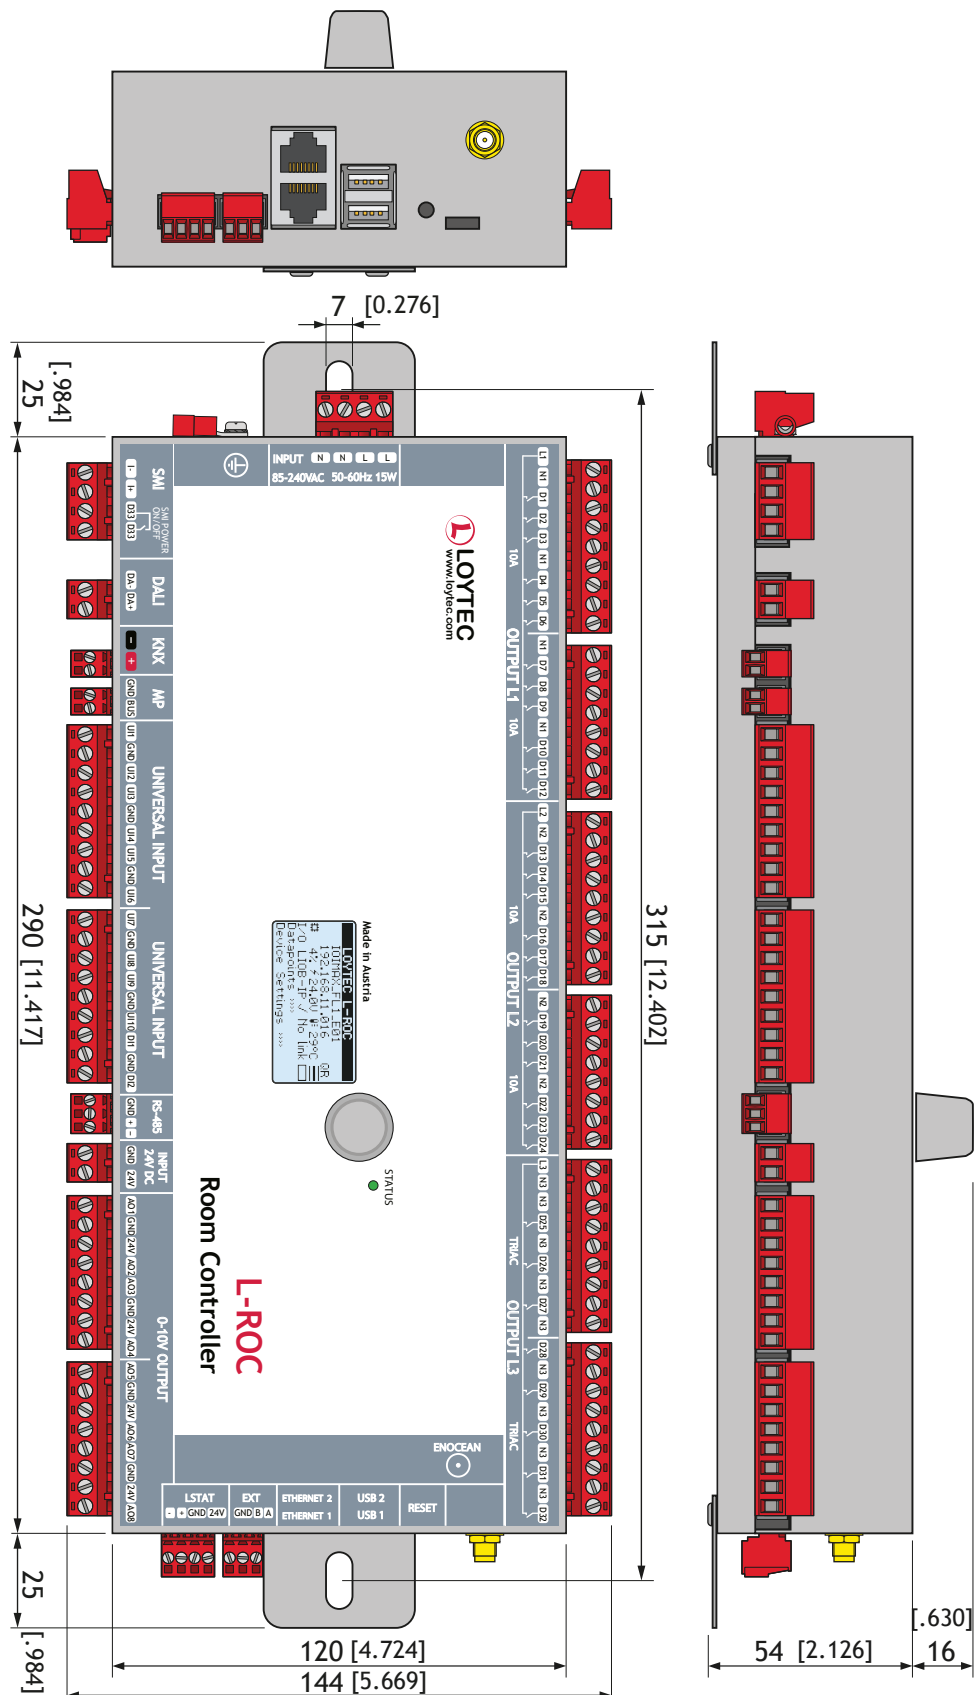

SCALE 1:2






## Dimensions of the devices in mm and [inch]

### DIM048

LBOX-ROC1

LBOX-ROC2

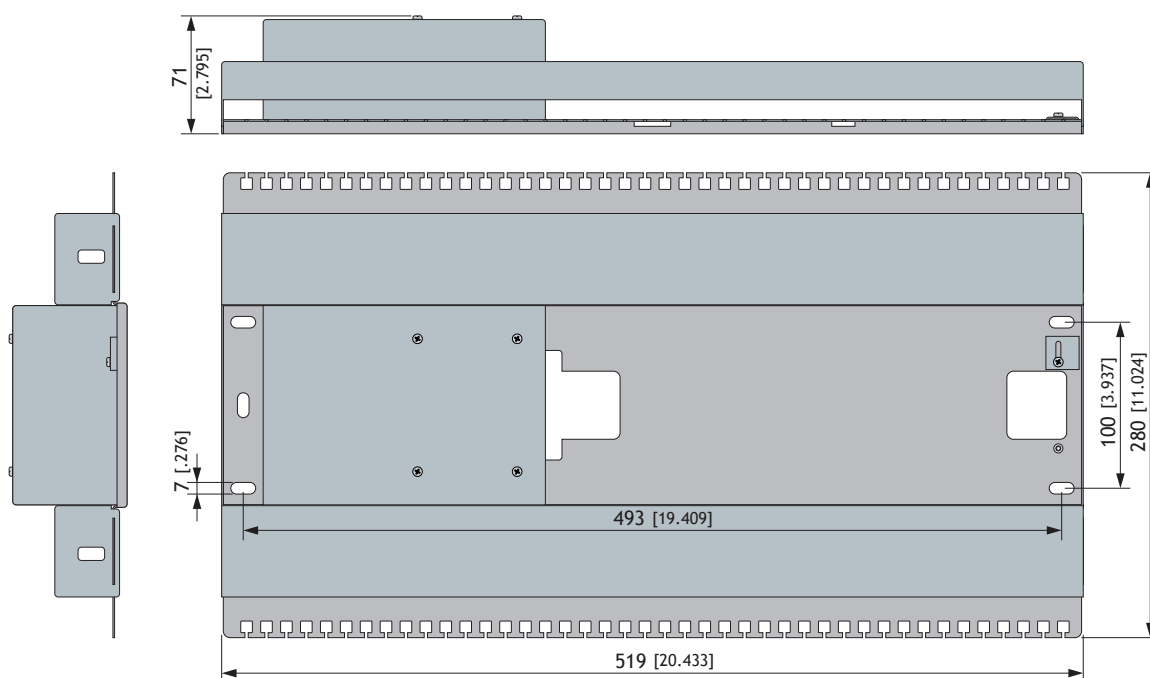

SCALE 1:4  
20 0 20 40 60 80 100 mm


### DIM049

LBOX-600

**Metal**  
DC01  
Sendzimir  
galvanized



|                 | L            | W           | A            | M            | N           |
|-----------------|--------------|-------------|--------------|--------------|-------------|
| <b>LBOX-600</b> | 600 [23.622] | 250 [9.843] | 485 [19.094] | 400 [15.748] | 160 [6.299] |

M, N ... mounting hole dimensions,  $\varnothing$  8.0 [0.315]

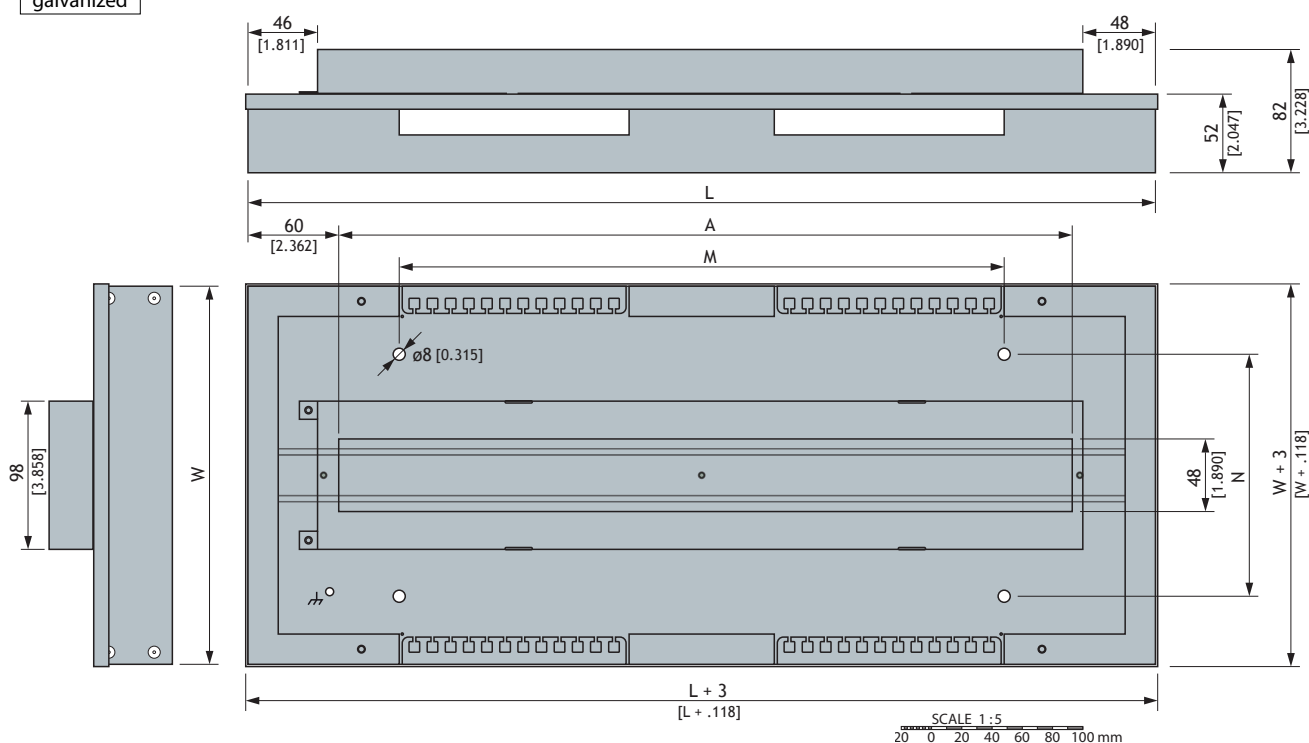

SCALE 1:5  
20 0 20 40 60 80 100 mm


DIM051 LMPBUS-804

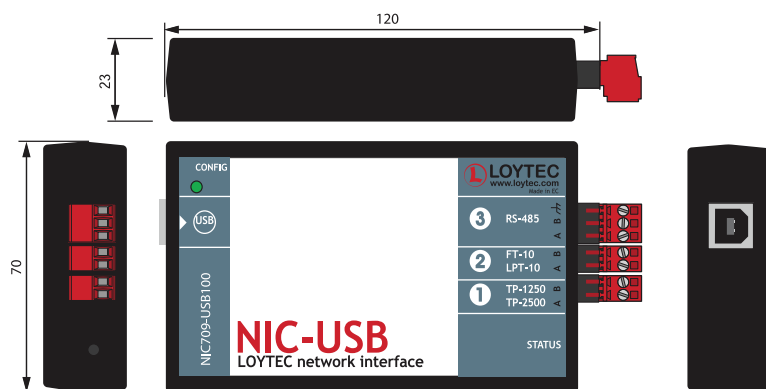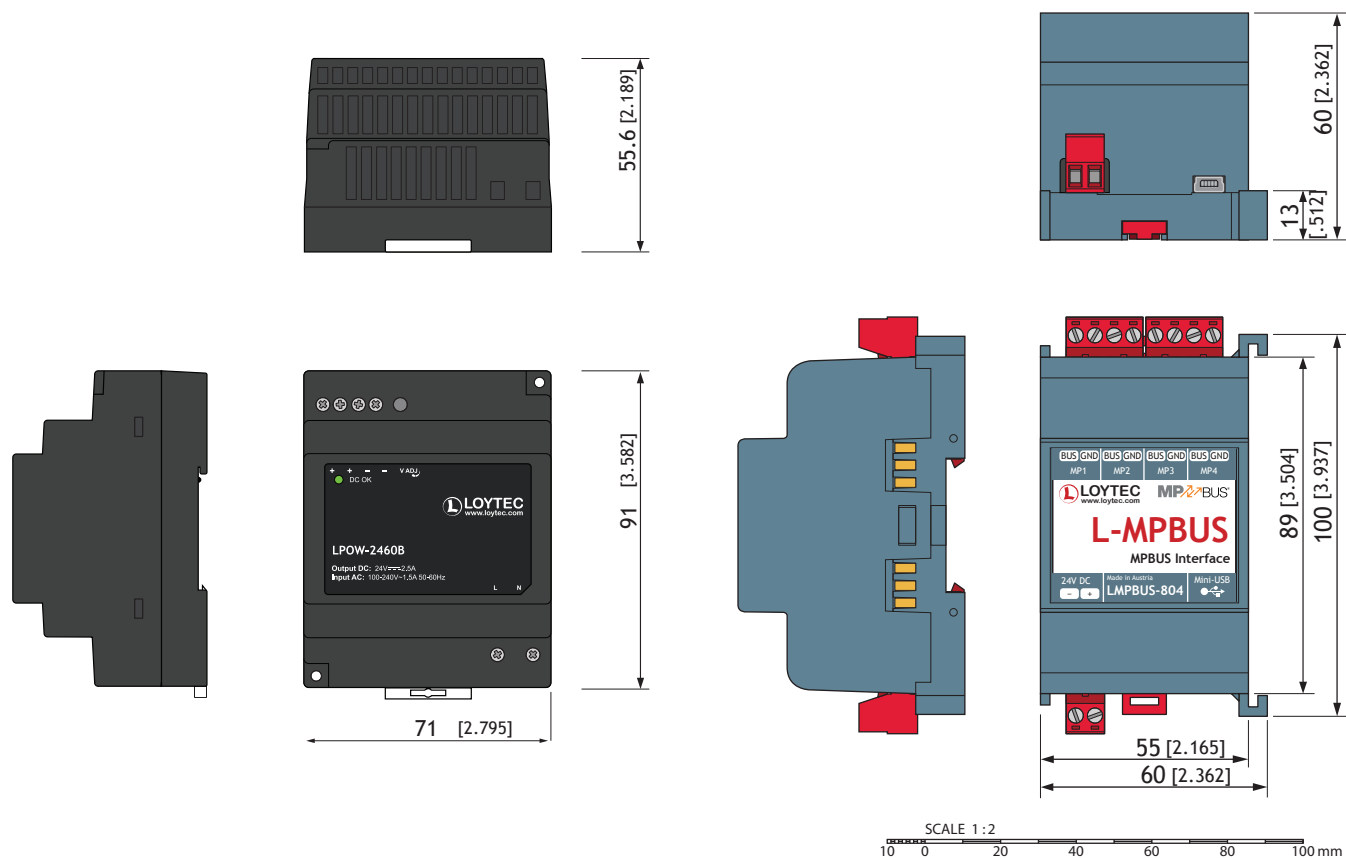

## Dimensions of the devices in mm and [inch]


### DIM053

LROC-102  
LINX-153  
LGATE-952

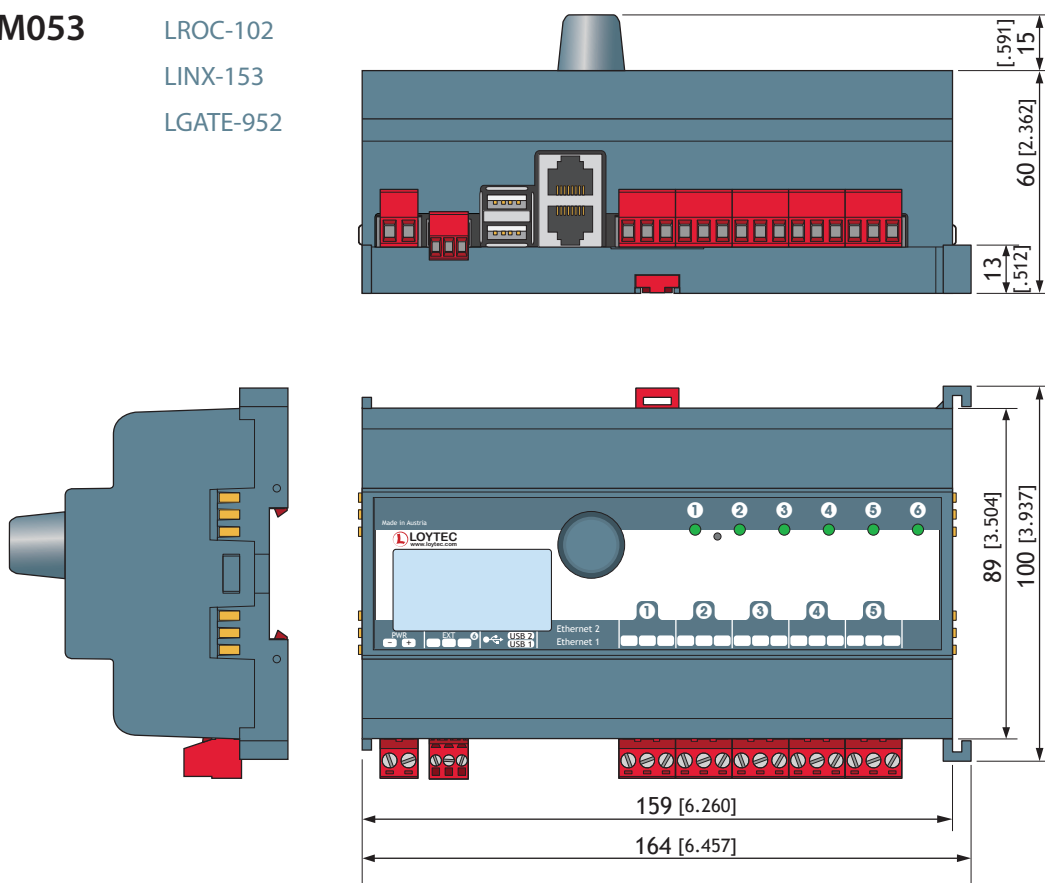

### DIM054

LINX-154  
LIP-3333ECTC  
LIP-ME204C

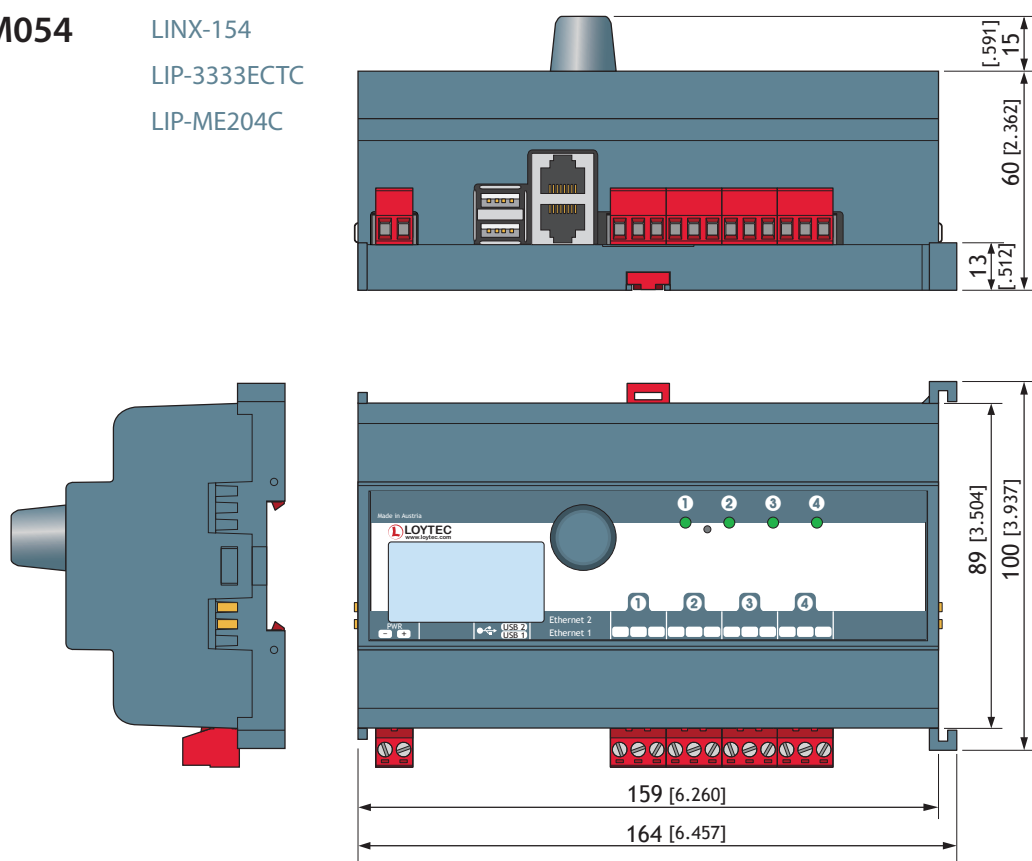

SCALE 1:2  
10 0 20 40 60 80 100 mm







# Certificates



## LonMark Certified Products

The L-IOB I/O Modules are officially certified as LonMark products:

- LIOB-150 LIOB-FT I/O Module



- LIOB-151, LIOB-152, and LIOB-153 LIOB-FT I/O Modules



- LIOB-154 LIOB-FT I/O Module
- LIOB-450, LIOB-451, LIOB-452, LIOB-453, and LIOB-454 LIOB-IP852 I/O Modules



## BACnet Conformance Certificates

The complete family of the BACnet enabled L-INX Automation Servers and L-GATE Gateways are BTL tested and certified according to the standard ISO 16484-6:2016 as BACnet Building Controllers (B-BC).



The LIP-ME20x BACnet/IP to BACnet MS/TP Router, the LROC-10x Controller, the LDALI-ME20x and the LDALI-PLC4 Controller are BTL tested and certified according to the standard ISO 16484-6:2016 as BACnet Building Controllers (B-BC).



The LIOB-BIP I/O Modules LIOB-55x, the LIOB-BIP I/O Controllers LIOB-58x, the LIOB-AIRx Controllers and the LROC-4xx Controllers are BTL tested and certified according to the standard ISO 16484-6:2016 as BACnet Building Controllers (B-BC).





## UL Certificate

The LOYTEC products are certified and registered according to the UL certification process.

**CERTIFICATE OF COMPLIANCE**

Certificate Number: 20160803-E475420  
Report Reference: E475420-20160727  
Issue Date: 2016-AUGUST-03

Issued to: LOYTEC electronics GmbH  
Blumengasse 35  
1170 Wien AUSTRIA


This is to certify that representative samples of MISCELLANEOUS CONTROLS  
LVIS-3ME7-G1, LVIS-3ME7-G2, LVIS-3ME12-A1,  
LVIS-3ME15-A1, LVIS-3ME15-G1, LVIS-3ME15-G2,  
LVIS-3ME15-G3  
LSTAT-80x-y-Lz where x can be 0 or 1 or 2, y can be G1 or G2 or G3 and z can be any digit from 1 to 6

Have been investigated by UL in accordance with the Standard(s) indicated on this Certificate.

Standard(s) for Safety: UL 80730-1 - AUTOMATIC ELECTRICAL CONTROLS FOR HOUSEHOLD AND SIMILAR USE - PART 1: GENERAL REQUIREMENTS  
CSA E60730-1:13 - AUTOMATIC ELECTRICAL CONTROLS FOR HOUSEHOLD AND SIMILAR USE - PART 1: GENERAL REQUIREMENTS

Additional Information: See the UL Online Certifications Directory at [www.ul.com/databases](http://www.ul.com/databases) for additional information

Only those products bearing the UL Certification Mark should be considered as being covered by UL's Certification and Follow-Up Service.  
Look for the UL Certification Mark on the product.



Page 1 of 1

**CERTIFICATE OF COMPLIANCE**

Certificate Number: 20161025-E475420  
Report Reference: E475420-20160728  
Issue Date: 2016-OCTOBER-25

Issued to: LOYTEC Electronics GmbH  
Blumengasse 35  
1170 Wien AUSTRIA

This is to certify that representative samples of COMPONENT - MISCELLANEOUS CONTROLS  
See Addendum Page

Have been investigated by UL in accordance with the Standard(s) indicated on this Certificate.

Standard(s) for Safety: UL 80730-1 and CSA E60730-1:13 AUTOMATIC ELECTRICAL CONTROLS FOR HOUSEHOLD AND SIMILAR USE - PART 1: GENERAL REQUIREMENTS


Additional Information: See the UL Online Certifications Directory at [www.ul.com/databases](http://www.ul.com/databases) for additional information

Only those products bearing the UL Certification Mark should be considered as being covered by UL's Certification and Follow-Up Service.

The UL Recognized Component Mark generally consists of the manufacturer's identification and catalog number, model number or other product designation as specified under "Marking" for the particular Recognition as published in the appropriate UL Directory. As a supplementary means of identifying products that have been produced under UL's Component Recognition Program, UL's Recognized Component Mark may be used in conjunction with the required Recognized Name. The Recognized Component Mark is required when specified in the UL Directory preceding the recognitions or under "Markings" for the individual recognitions.

Recognized components are incomplete in certain constructional features or restricted in performance capabilities and are intended for use as components of complete equipment submitted for investigation rather than for direct separate installation in the field. The final acceptance of the component is dependent upon its installation and use in complete equipment submitted to UL LLC.

Look for the UL Certification Mark on the product.



Page 1 of 2

**CERTIFICATE OF COMPLIANCE**

Certificate Number: 20161025-E475420  
Report Reference: E475420-20160728  
Issue Date: 2016-OCTOBER-25

This is to certify that representative samples of the product as specified on this certificate were tested according to the current UL requirements.

Models:  
LIP-3ECTB, LIP-3ECTB, LIP-3ECTC, LIP-3ECTC, LIP-333ECTB, LIP-ME201, LIP-3ECTC,  
LIP-33ECTC, LIP-ME201C, LIP-ME202C, LIP-ME204

LINK-100, LINK-101, LINK-110, LINK-111, LINK-200, LINK-201, LINK-210, LINK-211, LINK-102,  
LINK-103, LINK-112, LINK-113, LINK-114, LINK-115, LINK-116, LINK-117, LINK-118, LINK-119,  
LINK-121, LINK-220, LINK-221, LINK-150, LINK-151

LROD-100, LROD-101, LROD-400, LROD-401, LROD-402


LGATE-900, LGATE-902, LGATE-950, LGATE-951

LCOB-100, LCOB-101, LCOB-102, LCOB-103, LCOB-150, LCOB-151, LCOB-152, LCOB-153, LCOB-154,  
LCOB-180, LCOB-181, LCOB-182, LCOB-183, LCOB-184, LCOB-460, LCOB-461, LCOB-462, LCOB-463,  
LCOB-464, LCOB-465, LCOB-467, LCOB-468, LCOB-469, LCOB-470, LCOB-471, LCOB-472, LCOB-473,  
LCOB-474, LCOB-475, LCOB-476, LCOB-477, LCOB-478, LCOB-479, LCOB-480, LCOB-481, LCOB-482,  
LCOB-483, LCOB-484, LCOB-485, LCOB-486, LCOB-487, LCOB-488, LCOB-489, LCOB-490, LCOB-491, LCOB-492,  
LCOB-493, LCOB-494, LCOB-495, LCOB-496, LCOB-497, LCOB-498, LCOB-499, LCOB-500, LCOB-501, LCOB-502, LCOB-503, LCOB-504

LCOB-AIR1, LCOB-AIR2

LPOW-241SA, LPOW-241SB

LDAL-1PVR2U, LDAL-1PVR4U, LDAL-1E101-U, LDAL-1E201-U, LDAL-1E104-U, LDAL-1E102-U,  
LDAL-1E101-U, LDAL-1E204-U, LDAL-1E202-U, LDAL-1E201-U, LDAL-1E104-U, LDAL-1E102-U




Page 2 of 2

# Certificates



## EN ISO 9001:2015

We realize that the quality of our products substantially influences the overall performance of our customers' systems. Therefore we are committed to deliver high quality as defined by ISO 9001:2015. Our quality goals and their realization are documented in our quality management handbook and in process documents.

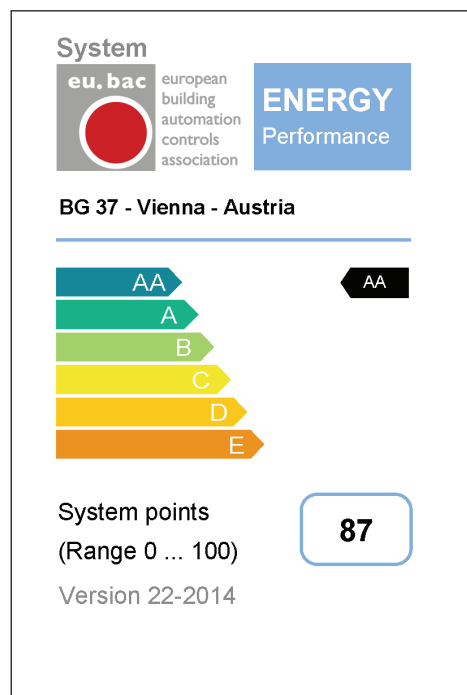

## eu.bac System Certification

Thanks to the efficiency features of the room automation system L-ROC, LOYTEC was able to acquire an eu.bac system certification of the highest class AA, reaching 87 out of 100 possible points, for the new building at Blumengasse 37 in March 2014. The registered eu.bac Cert Mark symbolizes energy efficiency and quality and is also the European quality label for products in the field of building automation.



## LOYTEC Trainings

We offer trainings in German, English, French, Italian, and Chinese. For further information on trainings please contact [sales@loytec.com](mailto:sales@loytec.com).



## LTRAIN-LSTUDIO

### Programming the L-INX Automation Server (3 days)

- Introduction into the L-STUDIO Software
- Concepts and structure of the IEC 61131 and IEC 61499 language
- Creating function logic with data points and graphical systems
- Working with function blocks, device types and resources
- Testing and debugging of the system
- Configuration of schedulers, alarms, and trends
- Deploying of logic and graphical projects
- Contents of the LOYTEC building automation library
- Working with the LOYTEC building automation library

## LTRAIN-LSTUDIO-PRE

### Preparation for L-STUDIO training (2 days)

- LOYTEC data point concept
- Creating data points for various bus systems in L-INX Configurator
- Configuration of schedulers, alarms and trends
- Implementation of L-IOB Modules via LIOB-Connect, LIOB-FT, LIOB-IP Bus
- Configuration of L-IOB I/Os for var. types of sensors and actuators
- Connection of sensors/actuators to L-IOB I/Os
- Creating of an L-VIS/L-WEB project
- Using various display controls / Using the Graphics Library
- Efficient project management by using templates

## LTRAIN-LROC

### Room Automation with L-ROC (2 days)

- System design based on a sample project
- Creating the IEC 61499 application for the same project
- Creating virtual room operating units and using them with LWEB-802/803
- Creating floor plan visualizations
- Integration into LWEB-900
- Parameterization, testing, and debugging the application
- Concepts and features of important IEC 61499 function blocks

## LTRAIN-GATEWAY

### Gateway Applications and data point management (2 days)

- LOYTEC data point concept
- CEA-709, BACnet, M-Bus, Modbus, OPC XML-DA
- AST™ functions, local and remote
- Building gateway applications with L-GATE, L-Proxy and L-INX

## LTRAIN-BMS

### LWEB-900 Building Management System (2 days)

- Introduction to the LWEB-900 system
- LWEB-900 Project Setup
- Working with LWEB-900 Views
- LWEB-900 User Management

## LTRAIN-DALI

### Lighting control with L-DALI (2 days)

- Introduction to DALI
- Features of the LOYTEC DALI Controllers
- Configuring LOYTEC DALI Controllers
- Setting up a DALI network
- Troubleshooting the DALI installation

## LTRAIN-GRAPHICS

### Graphical design with L-VIS and L-WEB (2 days)

- Creating L-VIS and LWEB-803 projects with the L-VIS/L-WEB Configurator
- Creating a distributed visualization based on L-INX and LWEB-803
- Efficient project design using templates

## LTRAIN-LIOB-AIR

### VAV Control with LIOB-AIR (2 days)

- Introduction to the LIOB-AIR system
- Adapting device templates
- Creating a complete VAV system
- Using the graphical user interface
- Connection to the AHU
- Integration into BACnet and CEA-709 systems
- Advanced features, examples and use cases

## Brochures



### LOYTEC Express Magazine for Building Automation

The new LOYTEC Express: Full of information and news about our company, our products and our partners. In addition you will find handy tips and a glimpse behind the scenes of LOYTEC.

For a free copy, please contact [info@loytec.com](mailto:info@loytec.com)!

For more info go to [www.loytec/news/loytec-express](http://www.loytec/news/loytec-express)



### L-FACTS

The L-FACTS folders provide an overview of LOYTEC's product portfolio.

Our new digital-only L-FACTS Plus (26 pages) includes tables listing detailed product specifications.

If you wish to receive a free printed copy of our L-FACTS (8 pages), please send an e-mail request to [info@loytec.com](mailto:info@loytec.com).

For more info go to [www.loytec/products/catalogs](http://www.loytec/products/catalogs).






## L-FOCUS: L-DALI Lighting Control Solutions

L-FOCUS is an information brochure about LOYTEC automation solutions. The focus of this edition is on our intelligent L-DALI Lighting Control Solutions.

For a free copy, please contact [info@loytec.com](mailto:info@loytec.com)!

For more info go to [www.loytec.com/products/catalogs](http://www.loytec.com/products/catalogs).

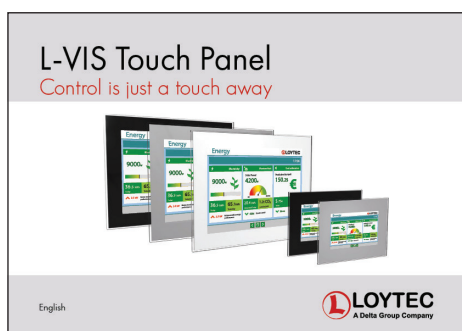


## L-VIS Touch Panel High-Gloss Brochure

The L-VIS Touch Panel high-gloss brochure provides information on our high-quality L-VIS touch panels and see how fascinating building control can be.

For a free copy, please contact [info@loytec.com](mailto:info@loytec.com)!

For more info go to [www.loytec.com/products/catalogs](http://www.loytec.com/products/catalogs).

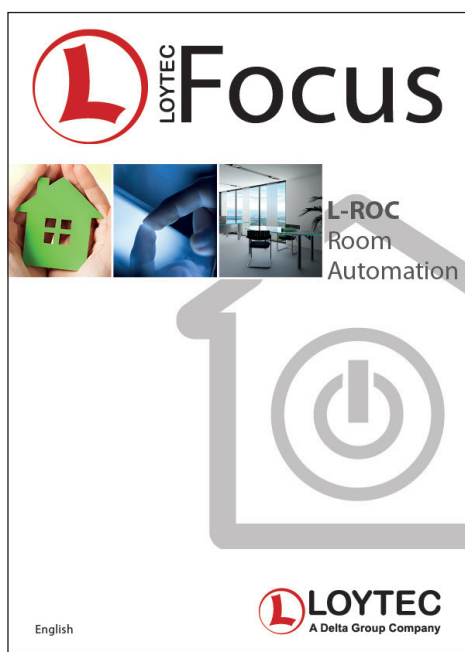

## L-FOCUS: L-ROC Room automation

L-FOCUS is an information brochure about LOYTEC automation solutions. The focus of this edition is on our L-ROC Room automation systems.

For more info go to [www.loytec.com/products/catalogs](http://www.loytec.com/products/catalogs).

# LOYTEC Competence Partner



## LOYTEC Competence Partner Program

LOYTEC is a provider of innovative product solutions for designing networked building automation systems and interconnected real estate. With our integrated products we offer the foundation to build highly efficient automation solutions.

We set high standards for ourselves regarding quality in research, development, and manufacturing of our products. As a LOYTEC Competence Partner you make a point of doing a professional planning and implementation of automation solutions to the satisfaction of your customers. With the Competence Partner Program we ensure that you get the necessary knowledge of LOYTEC products and implementation concepts through sustainable training programs.

A true partnership is the foundation for our joint success in the market.


### Therefore LOYTEC offers:

- A balanced partnership while utilizing and marketing LOYTEC product solutions
- Adjusted training programs for products and implementation concepts
- Technical support for LOYTEC products and applications
- Access to the programmable L-INX Automation Servers and L-IOB I/O Controllers
- Access to L-WEB Building Management Software
- Access to LOYTEC graphics and function libraries
- Priority information on new products and solutions
- LOYTEC Competence Partner LOGO for use in your marketing activities
- Your company data on our website with link to your website

### You offer:

- An established market access in building automation business
- Pro-active marketing of LOYTEC product solutions
- Pro-active feedback on LOYTEC products and market places
- A dedicated and technically well-trained team
- Regular attendance of LOYTEC trainings or trainings at a LOYTEC Competence Center
- At least two staff members in the team trained by LOYTEC or the LOYTEC Competence Center
- Preparation and publication of completed projects including a listing of utilized LOYTEC products and providing of project information for use by LOYTEC
- Link to LOYTEC website on your website

If you are interested in becoming LOYTEC Competence Partner, please contact [sales@loytec.com](mailto:sales@loytec.com)

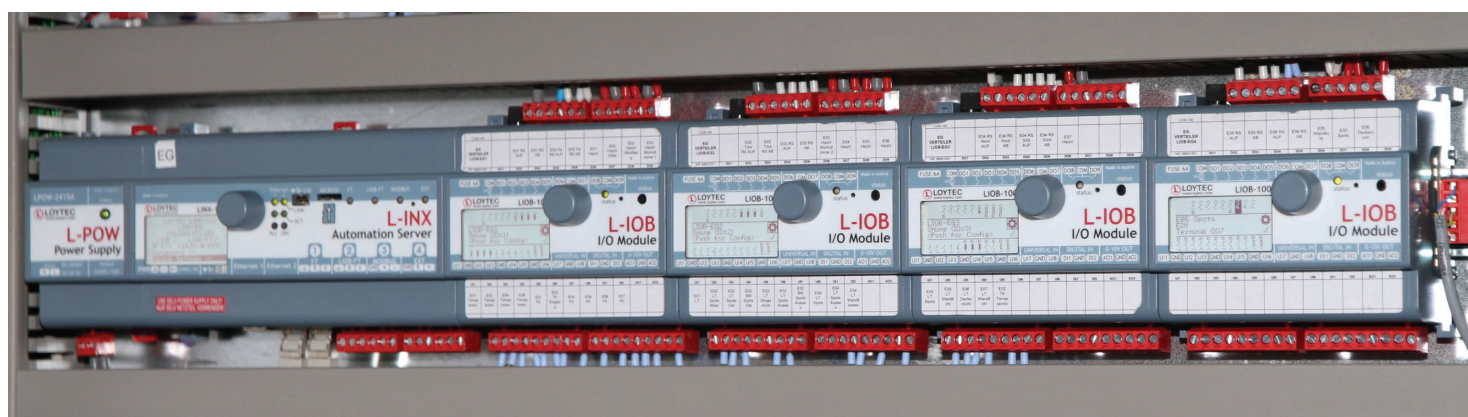



## LOYTEC Competence Center

As part of our worldwide expansive distribution strategy LOYTEC Competence Centers are important partners in the local markets. Being cooperation and distribution partners, LOYTEC Competence Centers are authorized to distribute automation products such as L-INX Automation Servers, L-IOB I/O Controllers, and L-ROC Room Controllers to LOYTEC Competence Partners. Extended by infrastructure products, gateways, DALI lighting controllers and touch panels, LOYTEC Competence Centers provide the complete range of hardware and software products by LOYTEC.



## LOYTEC Competence Partner

We set high standards for ourselves regarding quality in research, development and manufacturing of our products. As a 'Competence Partner' you make a point of doing a professional planning and completion of automation solutions to the satisfaction of your customers. With the 'Competence Partner Program' we ensure that you get the necessary knowledge for LOYTEC products and implementation concepts through sustainable training programs. A true partnership is the foundation for our joint success in the market.



## LOYTEC Distributor

LOYTEC distributors offer standard products such as infrastructure products, gateways, DALI light controls and touch panels. If you are interested in LOYTEC automation products such as L-INX Automation Servers, L-IOB I/O Controllers, and L-ROC Room Controllers please contact us directly or contact a local LOYTEC Competence Center.

AST, LC3020, L-Chip, L-Core, L-DALI, L-ENO, L-GATE, L-INX, L-IOB, LIOB-AIR, LIOB-Connect, LIOB-FT, L-IP, L-KNX, L-MBUS, L-MPBUS, L-OPC, LPA, L-POW, L-Proxy, L-ROC, L-STAT, L-STUDIO, L-Switch<sup>XP</sup>, L-TEMP, L-Term, L-VIS, L-WEB, L-WLAN, L-SMI, LTRAIN, NIC, ORION Stack, Smart Auto-Connect, buildings under control are trademarks of LOYTEC electronics GmbH.

Echelon, LON, LONWORKS, LNS, LonMaker, and Neuron are trademarks of Echelon Corporation registered in the United States and other countries. LonMark and the LonMark Logo are registered trademarks owned by LonMark International. BACnet is a registered trade mark of the American Society of Heating, Refrigerating and Air Conditioning Engineers, Inc. (ASHRAE).

KNX Association cvba is the owner of the worldwide standard for Home and Building Control: KNX and also the owner of the KNX trademark logo worldwide. DiiA, DALI and DALI-2 logos are registered trademarks of the Digital Illumination Interface Alliance. EnOcean® and the EnOcean logo are registered trademarks of EnOcean GmbH.

Other trademarks and trade names used in this document refer either to the entities claiming the markets and names, or to their products. LOYTEC disclaims proprietary interest in the markets and names of others.

Statements in this report that relate to future results and events are based on the company's current expectations. Actual results in future periods may differ materially from those currently expected or desired because of a number of risks and uncertainties.

No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of LOYTEC. Product specifications, availability, and design are subject to change without prior notice.

Document No. 04007419

2018-07-06

IMPRINT

Owner: LOYTEC electronics GmbH

Place of Publication: Vienna

Typesetting and printing errors reserved

© LOYTEC 2018

© Photos:

ANRIR/Shutterstock, Zastolskiy Victor/Shutterstock, Jens Schöninger/PIXELIO, Michael Ottersbach/PIXELIO, escapechen/PIXELIO, Gemini Arts/PIXELIO, GiRom/PIXELIO, Rainer Sturm/PIXELIO

## OUR MISSION

LOYTEC researches, develops and manufactures products and solutions to open up new ways and opportunities for the modern building automation business.

Utilizing innovative technologies and open communication protocols in trendsetting products, LOYTEC creates the basis for efficient system integration, highest energy efficiency during operation and protection of investment.



## CONTACT

LOYTEC electronics GmbH  
Blumengasse 35  
1170 Vienna  
Austria

[www.loytec.com](http://www.loytec.com)  
[info@loytec.com](mailto:info@loytec.com)  
phone: +43 (1) 4020805-0  
fax: +43 (1) 4020805-99

LOYTEC Americas, Inc.  
N27W23957 Paul Road  
Suite 103  
Pewaukee, WI 53072  
USA  
[www.loytec-americas.com](http://www.loytec-americas.com)  
[info@loytec-americas.com](mailto:info@loytec-americas.com)  
phone: +1 (262) 278-4370  
fax: +1 (262) 408-5238

Delta Electronics, Inc.  
256 Yangguang Street  
Neihu, Taipei 11491  
Taiwan  
R.O.C.  
[www.deltaww.com](http://www.deltaww.com)  
[bas.sales@deltaww.com](mailto:bas.sales@deltaww.com)  
phone: +886 (2) 8797 2088  
fax: +886 (2) 2659 8735

